



Flygt Submersible Pumps

AVAILABLE FOR RENTAL AND SALE




www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10


2000 Series Dewatering Pumps

Flygt 2000 pumps easily handle chemically aggressive, mechanically abrasive or highly viscous fluids laden with particles. Flygt 2000 products are available in lightweight aluminum or corrosion-resistant cast iron. Some models are available in MSHA-approved versions.


BS 2071

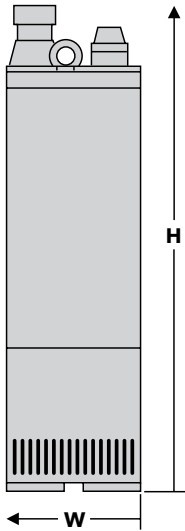


Model number: 2071.010
 Motor rating: 1 \emptyset : 4.1 HP@3425 RPM
 3 \emptyset : 6 HP@3335 RPM
 Voltage (1 \emptyset): 230V
 Full load amps: 17A
 Voltage (3 \emptyset): 230V 460V 575V
 Full load amps: 16A 8.1A 6.5A
 Versions: 2" Standard (2 stage)
 Imp. Code 236 (1 \emptyset), 231 (3 \emptyset)
 3" High volume
 Imp. Code 216 (1 \emptyset), 212 (3 \emptyset)
 Hose connection: Male NPSM threaded
 Pump dimensions: 7 1/4" W (max.) x 27" H (max.)
 Max. weight (lbs.): 68
 Description: Aluminum construction; open impeller, adjustable wear plate; rests on bottom strainer.
 Options: SS impellers

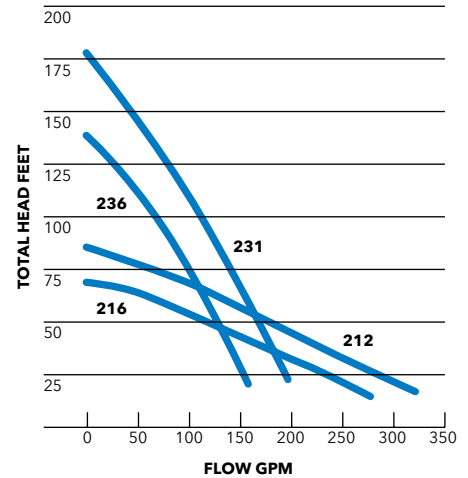


BS 2075.324

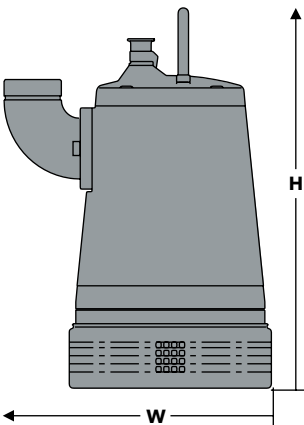


Model number: 2075.324
 Motor rating: 3 \emptyset : 5.4 HP@3425 RPM
 8.9 HP@3410RPM
 Voltage (3 \emptyset): 230V 460V 575V
 Full load amps: 14/23A 7.2/12A 5.8/9.4A
 Versions: 2" Super High head
 Imp. Code 272
 3" High head
 Imp. Code 234
 3" Standard
 Imp. Code 232
 Hose connection: Male NPSM threaded
 Pump dimensions: 12" W (max.) x 22" H (max.)
 Max. weight (lbs.): 88
 Description: Cast iron construction, open impeller, adjustable wear plate; rests on bottom strainer

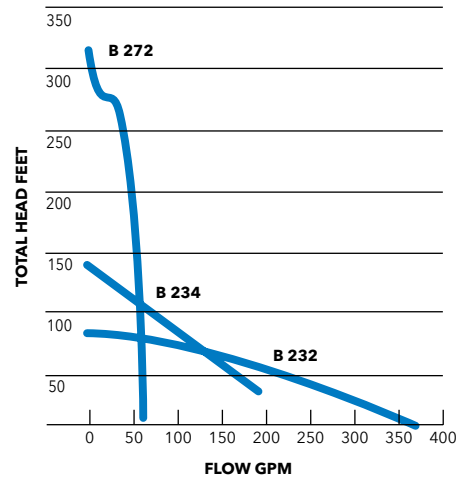

BS 2125

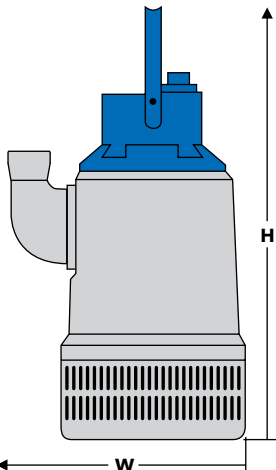

Model number: 2125.181
 Motor rating: 13 HP@3470 RPM
 Voltage (3 \emptyset): 230V 460V 575V
 Full load amps: 32A 16A 13A
 Versions: 3" High head (2 stage)
 Imp. Code 234
 Hose connection: Male NPSM threaded, or slip-on
 Pump dimensions: 18" W (max.) x 33" H (max.)
 Max. weight (lbs.): 176
 Description: Aluminum construction; open impeller, adjustable wear plate; rests on bottom strainer.

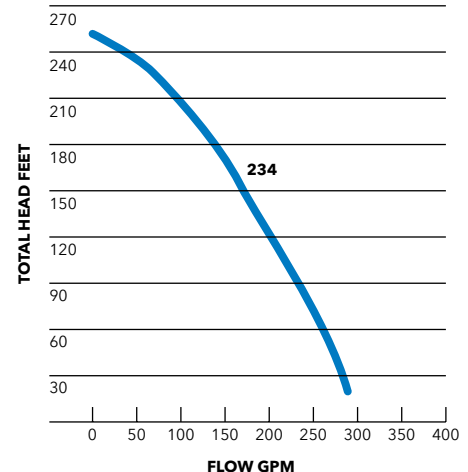

* Cast iron version 2125.320 available.