



Drain

Submersible drainage pumps



	A	B	C	DNm	Kg
Drain 100	122	392	300	1 1/4"	10,5

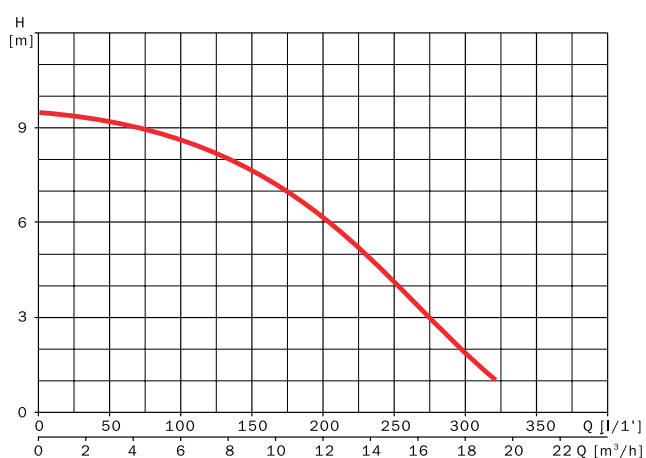

Applications

Drainage of dirty water with solids in suspension.

Materials

Pump Body

Anti corrosion treated cast iron.

Impeller

Noryl (glass loaded polymer).

Motor Casing

Stainless steel AISI 304.

Carry Handle

Stainless steel AISI 304.

Double Mechanical Seal

Silicon Carbide /alumine.

Motor

Class F insulation.

IP 68 Protection.

Continuous operation.

Limitations

Maximum solids handling: 5 mm.

Maximum immersion: 8 m.

Maximum temperature of liquid: 40°C.

Equipment

Supplied with 10m power cable.

Single phase supplied with capacitor box.

Drain M A: Complete with float switch.

MODEL	A			P1 (kW)		kW	HP	μF
	1~	3~		1~	3~			
	230 V	230 V	400 V					
Drain 100	3.1	-	-	0.7	-	0.75	1	12

Single phase manual	Price	Single phase automatic	Price	I/1'	25	50	100	150	200	250	300	320
				m³/h	1,5	3	6	9	12	15	18	19,2
Drain 100 M	250	Drain 100 M A	263	H [m]	9,2	9,1	8,7	7,8	6	4	2	1