


À NOTER :

- Etanchéité par garniture mécanique carbone céramique
Possibilité d'avoir SIC/SIC sur demande
- Turbine inox
- Hauteur d'aspiration 5 m maxi

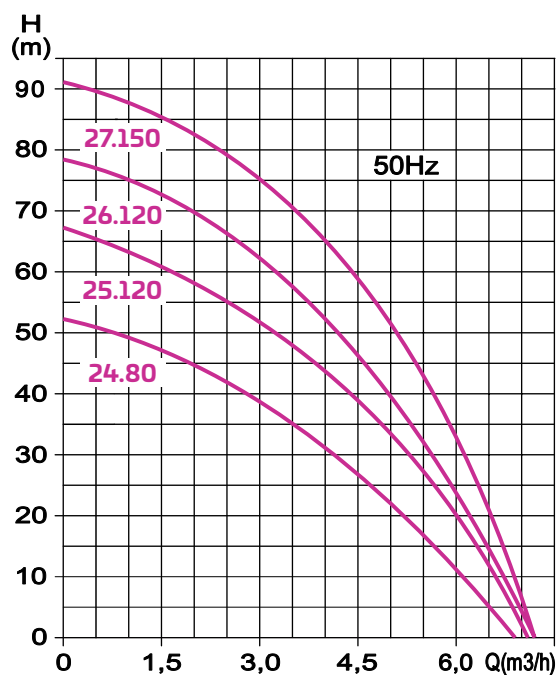

Type	Dimensions (mm)							Poids Kg
	A	R1	R2	L1	L2	L3	M	
CMV 24.80.	21,5	156	177	160	125	177	380	14,5
CMV 25.120.	21,5	170	192	160	125	177	400	15
CMV 26.120.	21,5	190	212	160	125	177	420	15,5
CMV 27.150.	21,5	210	232	160	125	177	440	17

Type	Tension V	Puissance		Moteur		Raccordement DNA / DNR	H (max) m	Débit (max) m³/h	Code
		kW	CV	A	µF				
CMV 24.80.1	Monophasé 1 x 230	0,8	1,1	5,4	16	1"	52	7,2	01010278
CMV 25.120.1		1,2	1,6	7,2	20	1"	67	7,2	01010280
CMV 26.120.1		1,2	1,6	7,8	25	1"	78	7,2	01010646
CMV 27.150.1		1,5	2	8,6	25	1"	91	7,2	01010864
CMV 24.80.3	Triphasé 3 x 400	0,8	1,1	2,3	-	1"	52	7,2	01010279
CMV 25.120.3		1,2	1,6	2,8	-	1"	67	7,2	01010281
CMV 26.120.3		1,2	1,6	3,5	-	1"	78	7,2	01010647
CMV 27.150.3		1,5	2	3,8	-	1"	91	7,2	01010763