







NPM/NP



SAM/SA



Existe aussi en surpresseur :
voir page 46

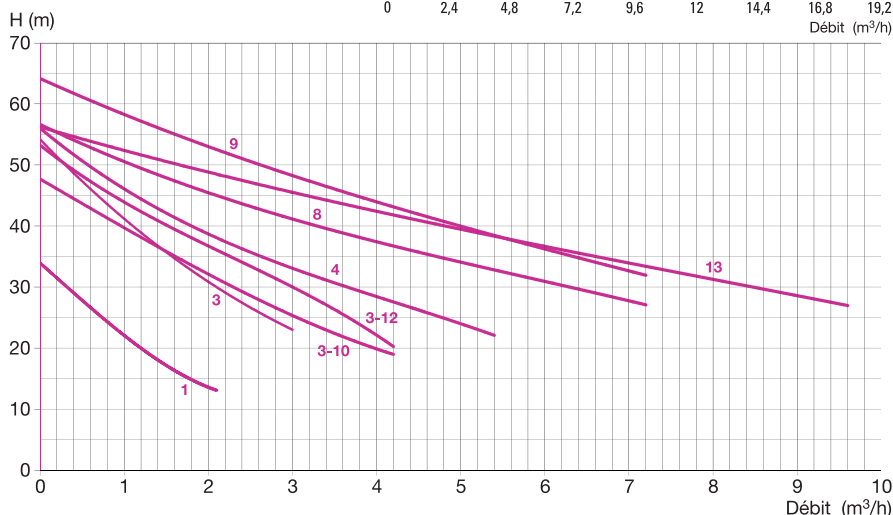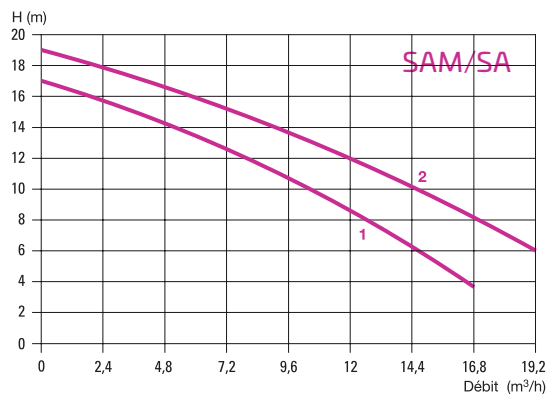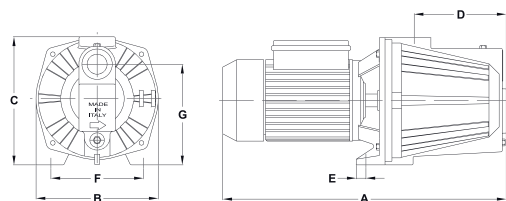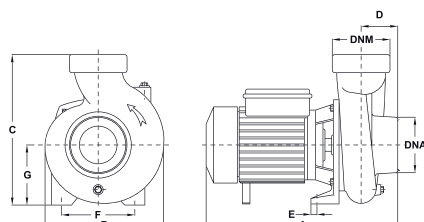

Type	Dimensions (mm)							Poids Kg
	A	B	C	D	E	F	G	
NPM / NP 1 CR	360	185	195	90	17,5	140	152,5	12,1
NPM / NP 3	430	185	195	141	17,5	140	152,5	15,7
NPM / NP 4 à 13	510	210	220	166	18	166	165	25,3 > 27,8
SAM / SA 1	310	186	235	38	15	140	105	13,3
SAM / SA 2	310	186	235	38	15	140	105	13,9

Type Monophasé 1 x 230 V	Type Triphasé 3 x 400 V	Roue	Puissance		Moteur Monophasé		Moteur Triphasé		Raccordements		H (max) m	Débit (max) m³/h
			kW	CV	A	μF	A		DNA	DNR		
NPM 1 CR	NP 1 CR	Noryl	0,45	0,5	3,5	12,5	0,8		1"		34,0	2,1
NPM 3	NP 3	Noryl	0,75	1	4,8	20	1,8		1"		54	3,0
NPM 3/10	NP 3/10	Noryl	0,75	1	4,8	20	1,8		1"		48	4,2
NPM 3/12	NP 3/12	Noryl	0,88	1,2	5,2	20	1,8		1"		53	4,2
NPM 4	NP 4	Noryl	1,1	1,5	7	31,5	2,6	1"1/4	1"		56	5,4
NPM 8	NP 8	Laiton	1,1	1,5	9	31,5	3,2	1"1/2	1"		56	7,2
NPM 9	NP 9	Laiton	1,5	2	11,2	40	3,8	1"1/2	1"		64	7,2
NPM 13	NP 13	Laiton	2,2	3	14	45	5	1"1/2	1"		56	9,6
SAM 1	SA 1	Bronze	0,55	0,75	4,5	16	1,5		1"1/2		17	16,8
SAM 2	SA 2	Bronze	0,75	1	5	20	1,8		1"1/2		19	19,2