

ap

AURORA PUMP A member of PENTAIR PUMP GROUP

AURORA PUMP

BULLETIN 370B/REV. C

**370 SERIES
TWO STAGE
END SUCTION
PUMPS**

CAPACITIES TO 310 G.P.M.
HEADS TO 790 FEET
TEMPERATURES TO 300°F.



MODEL 374B

(OPTIONAL POSITION 3 SHOWN)

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX


Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com

INTRODUCTION

AURORA 370 SERIES PUMPS

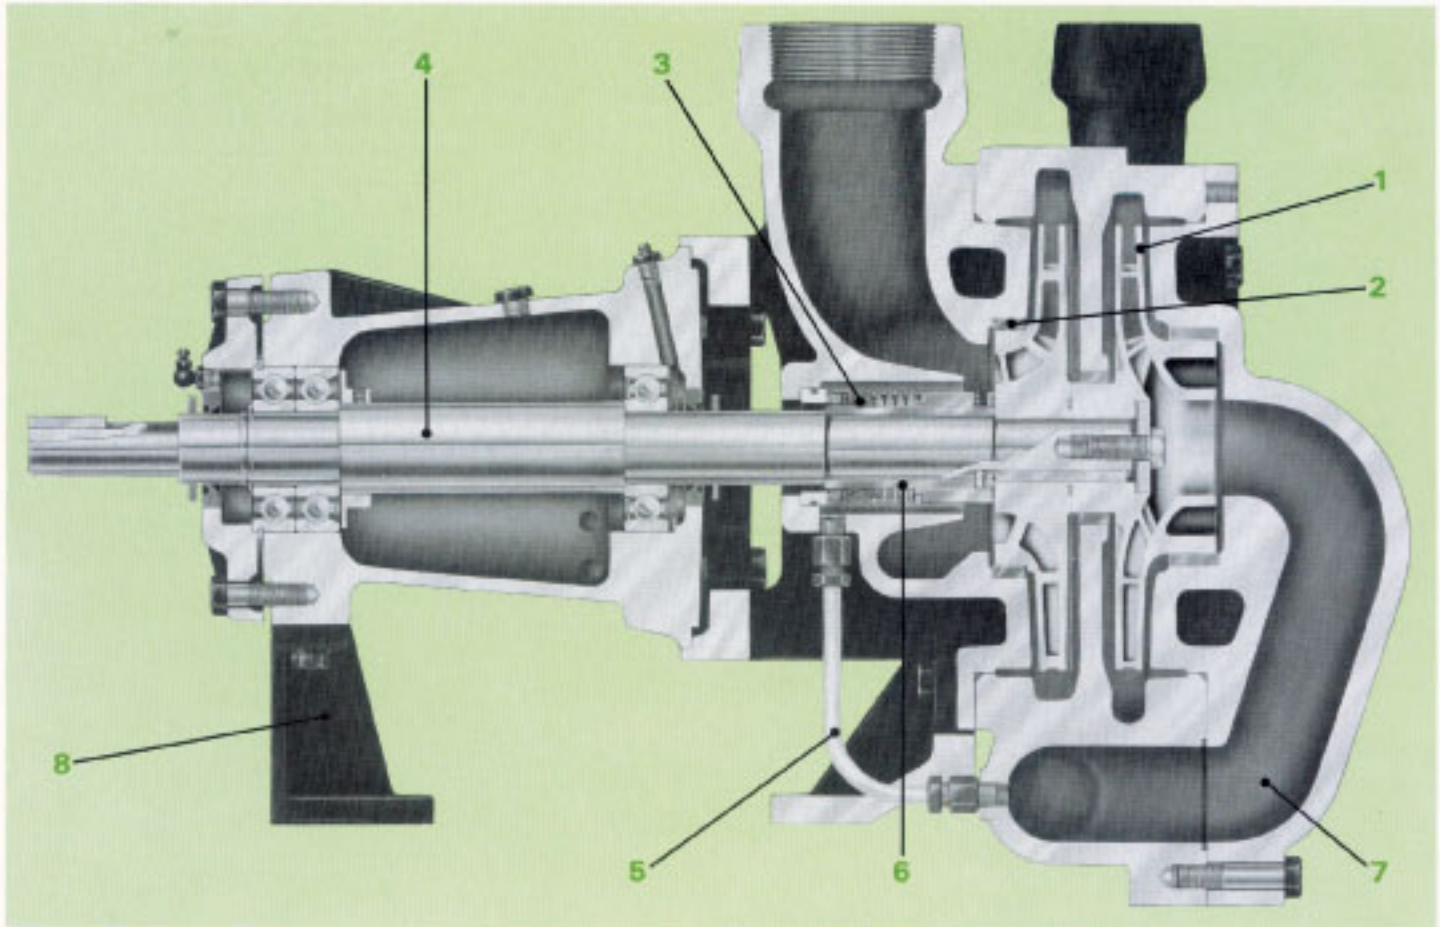

Compact system designs, application trends requiring increased pressures and temperatures and the much higher costs of engineering and construction have brought about a demand for a practical multi-stage frame mounted end suction pump. Various pressures and forces generated within a multi-stage unit must balance making

shaft and bearing design more critical than in single stage units. Split case pump designs readily solve the mechanical problems of multi-staging, but are costly. Aurora Pump, a leader in the pump industry, has combined over 75 years of knowledge in multi-stage split case and end suction design and manufacturing techniques to

produce a unique combination of technical features in the 370 Series. Significantly, this new Aurora pump design offers:

- LOW NPSH REQUIREMENTS
- RELIABLE OPERATION
- COMPACT DESIGN FOR EASY INSTALLATION AND MAINTENANCE
- QUIET, SMOOTH-RUNNING DESIGN FOR LONGER LIFE

QUICK REFERENCE 370 SERIES FEATURE SELECTOR

STANDARD

Iron fitted construction
Bronze shaft sleeves
Dynamically balanced cast iron shell core enclosed impellers
Bronze case wearing rings
Regreasable bearings
Discharge position No. 1
Hydrostatic test
Carbon steel shaft
303 Stainless high temp. mech. seal
"O" ring sealed shaft sleeve
Coupling guard

OPTIONAL

All iron construction
316 Stainless steel shaft sleeves
Stainless steel shaft or sleeve
Cast iron case wearing rings
Oil lubricated ball bearings
Alternate piping positions
Steel drip-rim bases
316 Stainless, special high temperature mechanical seal with Cranelast, Tungsten Carbide and Carbon parts

PUMP FEATURES AND ENGINEERING DETAILS

1 DYNAMICALLY BALANCED IMPELLERS keyed to the shaft and secured by a capscrew and washer. Quality controlled manufacturing process assures consistently high performance. Enclosed design provides highest efficiency, low NPSH and minimum wear for long service life. After developing pressure in the first stage impeller the liquid is directed to a second stage impeller where the process is repeated, doubling the discharge head. By offsetting the discharges by 180°, the radial loads on the bearing are balanced and shaft deflection is minimized.

2 CASE WEARING RINGS prevent wear on casing and are easily and inexpensively replaced.

3 HIGH TEMPERATURE MECHANICAL SEAL is standard and located on the first stage to eliminate the need for costly high pressure seal and premature failure.


4 CARBON STEEL SHAFT is designed for minimum deflection, not to exceed .002" at the sealing faces at maximum load. Bearings selected for 2 years minimum life at maximum load. Average bearing life is 10 years. Grease lubrication is standard.

5 RELIEF LINE assures adequate venting of the seal chamber and lube of the seal faces.

6 BRONZE SHAFT SLEEVE prevents shaft wear and extends the entire length of the seal box. The sleeve is slip fit over the shaft and is keylocked. Shaft sleeve and impeller screw are sealed by "O" ring gaskets to eliminate corrosion of the shaft by the pumped liquid. This eliminates the requirements for high cost, stainless steel shafts.

7 HYDROSTATIC TEST guarantees casting and seal integrity.

8 REAR SUPPORT FOOT provides power frame support and simplifies coupling alignment.

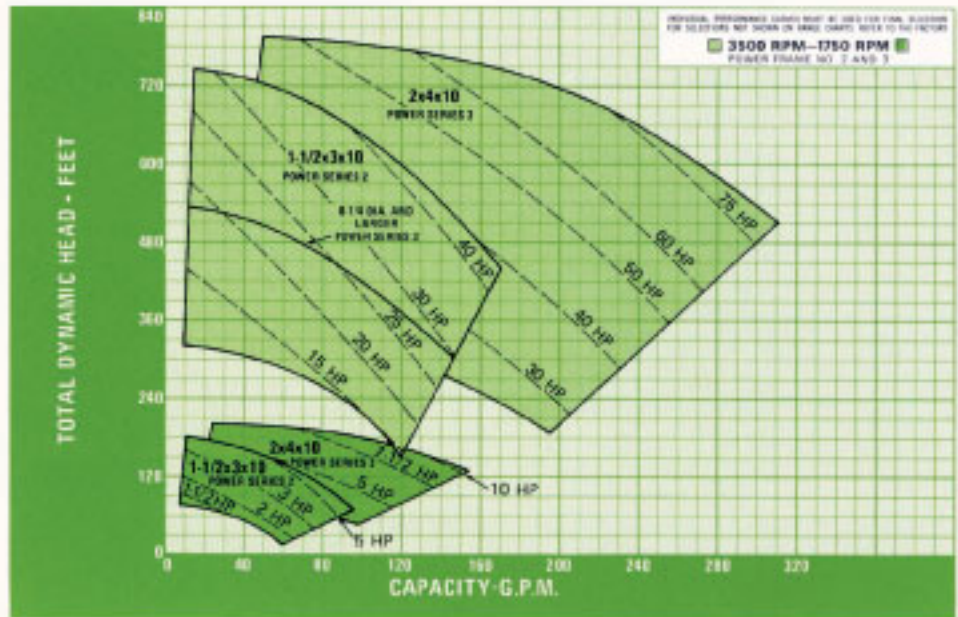


LIMITATIONS

| MAXIMUM LIMITATIONS BASED ON STANDARD MATERIALS AND PUMPING CLEAR WATER | | |
|---|------------------------------------|---------------|
| SPEED - RPM | MODEL 374 | 3900 |
| H.P. | 1 1/2 x 3 x 10 | 60 |
| | 2 x 4 x 10 | 100 |
| HYDROSTATIC TEST PRESSURE P.S.I. | | 600 |
| CASE WORKING PRESSURE P.S.I. | -20° to 150° F. | 400 |
| | 200° F. | 370 |
| | 225° F. | 355 |
| | 250° F. | 340 |
| | 275° F. | 325 |
| 300° F. | 310 | |
| SUCTION PRESSURE P.S.I. | | 100 |
| TEMP. °F | SEALING METHOD | FRAME MOUNTED |
| | STD. HIGH TEMP. MECHANICAL SEAL | 225 |
| | SPECIAL HIGH TEMP. MECHANICAL SEAL | 300 |

DESIGN DETAILS

| AREA | DESCRIPTION | POWER SERIES | |
|--------------|--|--------------|--------|
| | | 2 | 3 |
| PUMP SHAFT | ROTATION - FROM DRIVER END | CW | CW |
| | DIAMETER AT IMPELLER | 1 1/4 | 1 1/2 |
| | DIAMETER AT SHAFT SLEEVE | 1 1/8 | 1 1/2 |
| | DIAMETER BETWEEN BEARINGS | 1 1/16 | 2 3/8 |
| | DIAMETER AT COUPLING END | 1 1/8 | 1 3/8 |
| | COUPLING KEY - SQUARE | 3/4 | 3/8 |
| | MAX. DEFLECTION AT SEAL FACE | .002 | .002 |
| BALL BEARING | OUTSIDE DIA. OF SLEEVE | 1 1/4 | 1 1/4 |
| | BEARING (INB. RADIAL) | 308 | 310 |
| | BEARING (MATCHED SET) CONRAD | 308 | 310 |
| | ANGULAR CONTACT | 7308 | 7310 |
| | BEARING CENTERS | 7 1/16 | 7 1/16 |
| | MIN. B ₁₀ BEARING LIFE UNDER MAXIMUM LOAD | 2 YRS. | 2 YRS. |

OUTBOARD TANDEM THRUST BEARING

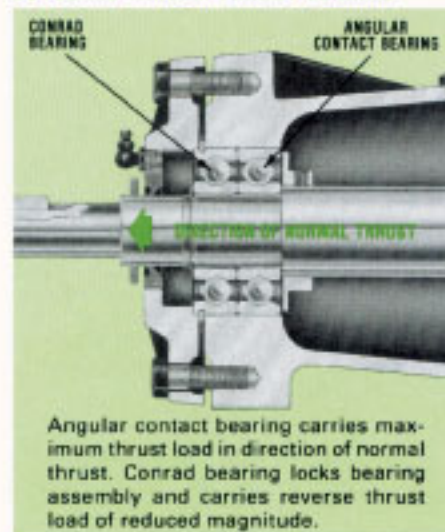

MATERIALS OF CONSTRUCTION


| PUMP PART | IRON FITTED | ALL IRON |
|-----------------|--|--------------------------|
| BRACKET | CAST IRON ASTM A48 | CAST IRON ASTM A48 |
| CASING | CAST IRON ASTM A48 | CAST IRON ASTM A48 |
| IMPELLERS | CAST IRON ASTM A48 | CAST IRON ASTM A48 |
| COVER | CAST IRON ASTM A48 | CAST IRON ASTM A48 |
| MECHANICAL SEAL | 300 STAINLESS STEEL METAL PARTS. "Buna-N" ELASTOMER PARTS. NI-RESIST SEAT AND CARBON WASHER. | |
| POWER FRAME | CAST IRON ASTM A48 | CAST IRON ASTM A48 |
| SHAFT | STEEL AISI C1045 | STEEL AISI C1045 |
| SLEEVES | BRONZE ASTM B62 | STAINLESS STEEL AISI 316 |
| WEARING RINGS | BRONZE ASTM B62 | CAST IRON ASTM A48 |

AND DIMENSIONS

The contractor shall furnish (and install as shown on the plans) Aurora Model (374 horizontal flexible coupled) centrifugal pump sizes 1½ x 3 x 10 or 2 x 4 x 10 (iron fitted) (all iron) construction. Each pump shall have a capacity of G.P.M. at ft. total head, with a temperature of °F., N.P.S.H. required and specific gravity. Each pump is to be furnished with a (standard) (high temperature) mechanical seal with all metal parts to be (303) (316) stainless steel with ("Buna-N") (Cranelast) elastomers, (Ni-Resist) (Tungsten Carbide) seat, and carbon washer. The unit must be equipped with (bronze) (stainless steel) key-locked shaft sleeve that extends the length of the seal box. The pump shaft extension shall be "O" ring sealed from the pumped liquid. Pump shall have case wearing rings.

Impellers are to be precision shell core cast, dynamically balanced, and keylocked to the shaft.

Pump and motor are to be mounted on a common (formed steel drip rim) (steel) baseplate. The shaft is to be carbon steel, installed in a cast iron power frame. Pumps shall have a shaft design for .002" deflection at the seal face with the pump running under maximum load condition. (Grease) (Oil) lubricated ball bearings, having a 2 year minimum life (AFBMA B₁₀) under the maximum condition of load and protected by separate oil seals and slingers, shall be used. The pump shall be flexible coupled to a standard horizontal NEMA HP, phase, Hertz, volts, R.P.M., (drip-proof) (totally enclosed) (explosion-proof) motor. Alignment shall be checked in accordance with the Standards of the Hydraulic Institute after installation and there shall be no strain transmitted to pumps.

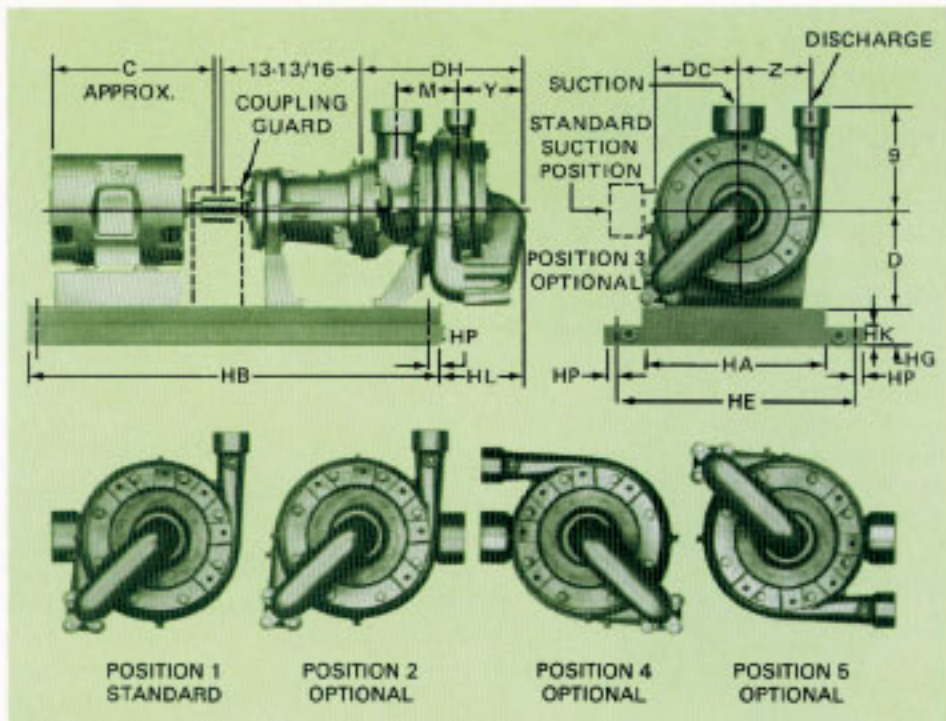

| PUMP SIZE | | | D | DC | DH | HL | M | Y | Z |
|-----------|-------|-----------|---|----|-----|----|----|----|----|
| DISCH. | SUCT. | CASE BORE | | | | | | | |
| 1½ | 3 | 10 | 8 | 7 | 14½ | 8 | 5¾ | 5⅞ | 6⅞ |
| 2 | 4 | 10 | 9 | 7¾ | 15⅞ | 9⅞ | 6¾ | 6⅞ | 6⅞ |

| PUMP MODEL | BASE NUMBER | WEIGHT POUNDS | HA | HB | HE | HG | HP | HK | POWER FRAME WEIGHT (LBS.) | |
|------------|-------------|---------------|----|-----|-----|----|----|----|---------------------------|----|
| | | | | | | | | | 2 | 3 |
| 374 | 5 | 56 | 11 | 36½ | 15¾ | 3 | 1¼ | 1½ | 82 | 87 |
| | 6 | 68 | 11 | 42½ | 15¾ | 3 | 1¼ | 1½ | | |
| | 8 | 96 | 14 | 42½ | 19 | 3 | 1¼ | 1½ | | |
| | 9 | 110 | 14 | 48½ | 19 | 3 | ¾ | 1½ | | |
| | 11 | 164 | 18 | 46½ | 25½ | 4 | 1¼ | 2 | | |
| | 12 | 192 | 18 | 54½ | 25½ | 4 | 1¼ | 2 | | |

- NOTES:**
- Dimensions and weights are approximate.
 - All dimensions are in inches and may vary ± 1/16".
 - Frame sizes, "C" dimension and motor weight are for open drip-proof motors only.
 - Conduit box is shown in approximate position. Dimensions are not specified as they vary with each motor manufacturer.
 - Add pump, base and motor weight for unit weight.
 - Not for construction purposes unless certified.
 - Discharge position No. 1 is furnished as standard unless otherwise specified.
 - Aurora Pump reserves the right to make revisions to its products and their specifications, and to this bulletin and related information, without notice.
 - Note: Power frame selection can be made from the range charts.

| MOTOR FRAME | HORSEPOWER | | MOTOR WEIGHT IN LBS | C | BASE NUMBER |
|-------------|------------|----------|---------------------|----|-------------|
| | 3500 RPM | 1750 RPM | | | |
| 143T | — | 1 | 30 | 12 | 5 |
| 145T | — | 1½-2 | 35 | 13 | 5 |
| 182T | — | 3 | 45 | 13 | 5 |
| 184T | — | 5 | 50 | 14 | 5 |
| 213T | 10 | 7½ | 120 | 16 | 5 |
| 215T | 15 | 10 | 144 | 18 | 6 |
| 254T | 20 | 15 | 217 | 21 | 8 |
| 256T | 25 | — | 246 | 23 | 9 |
| 284TS | 30 | — | 320 | 22 | 9 |
| 286TS | 40 | — | 351 | 24 | 9 |
| 324TS | 50 | — | 442 | 25 | 11 |
| 326TS | 60 | — | 522 | 26 | 11 |
| 364TS | 75 | — | 540 | 27 | 11 |
| 365TS | 100 | — | 590 | 28 | 12 |

| PUMP SIZE | PUMP WEIGHT |
|-------------|-------------|
| 1½ x 3 x 10 | 215 LBS |
| 2 x 4 x 10 | 325 LBS |

NOTE: Aurora Pump reserves the right to make revisions to its products and their specifications, and to this bulletin and related information without notice.

— Your Authorized Local Distributor —

motralec
 4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
 Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
 Demande de prix / e-mail : service-commercial@motralec.com
www.motralec.com

WEMA

ap AURORA®
 French Pump Group

MARKETING & SALES:
 880 HURON ROAD • NORTH AURORA, ILLINOIS U.S.A. • 60542
 PHONE: (630) 859-7300 U.S.A./CANADA FAX: (630) 859-7968
 WORLDWIDE FAX: (630) 859-1226
 WEB: www.aurorapump.com
 EMAIL: aurora_info@pump.com
AURORA MFG. PLANT:
 880 HURON ROAD • NORTH AURORA, ILLINOIS U.S.A. • 60542
 SIXTY OFFICES IN ALL MAJOR CITIES AND COUNTRIES
 Refer to "Pumps" in yellow pages of your phone directory for your local Distributor.