



AutoBlend Systems

Bitumen Emulsion Production

Advantages

- High capacity.
- Consistent product quality.
- Cost savings by direct connection to storage tanks.




Bitumen emulsions are used for road surface maintenance.

The emulsion components (bitumen, water, additives and emulsifiers) are taken directly from their storage tanks. The precise metering of each component ensures constant high quality when the mixture passes through the colloid mill to form the emulsion.

Components

- 1 multi-headed metering pumps with manual stroke adjustment, 4 plunger heads (2 double-acting)
- 2 air vessels
- 1 static mixer
- Heating jacket for 2 pump heads and 1 suction-side pipe
- 4 in-line filters

Simplified process diagram

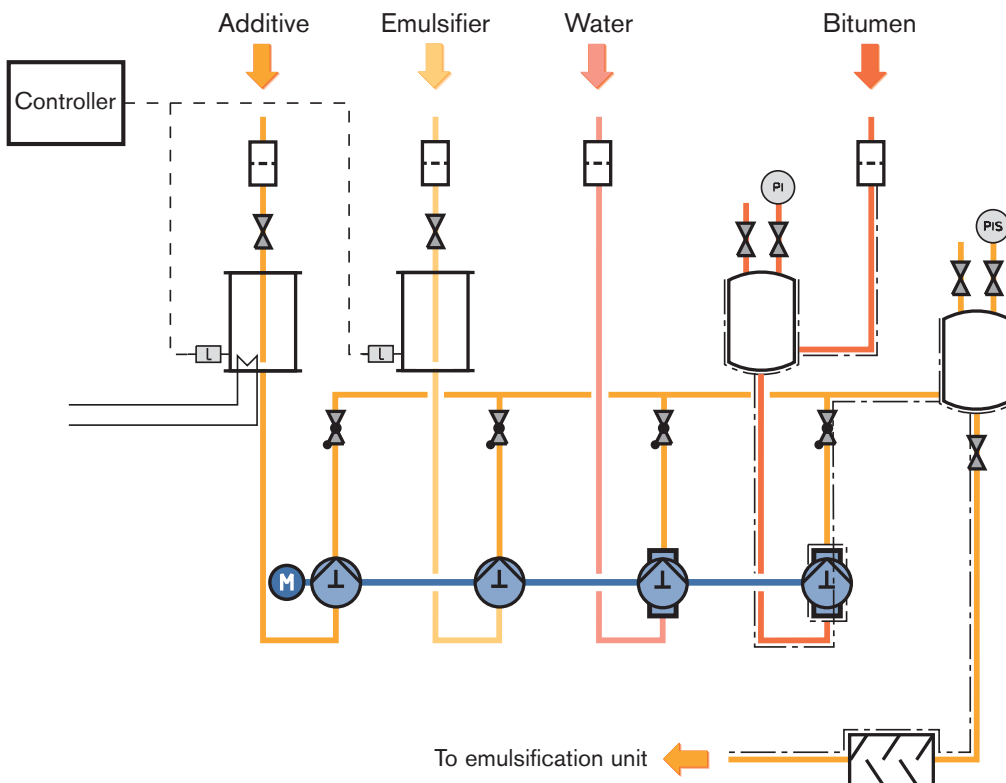

SPX
WHERE IDEAS MEET INDUSTRY

Your local contact:

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / e-mail : service-commercial@motralec.com
www.motralec.com