



STAIRS

50Hz

ST SERIES PLASTIC PUMPS

ISO
9001

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX

Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48


Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com



ST-05


Performance Curves

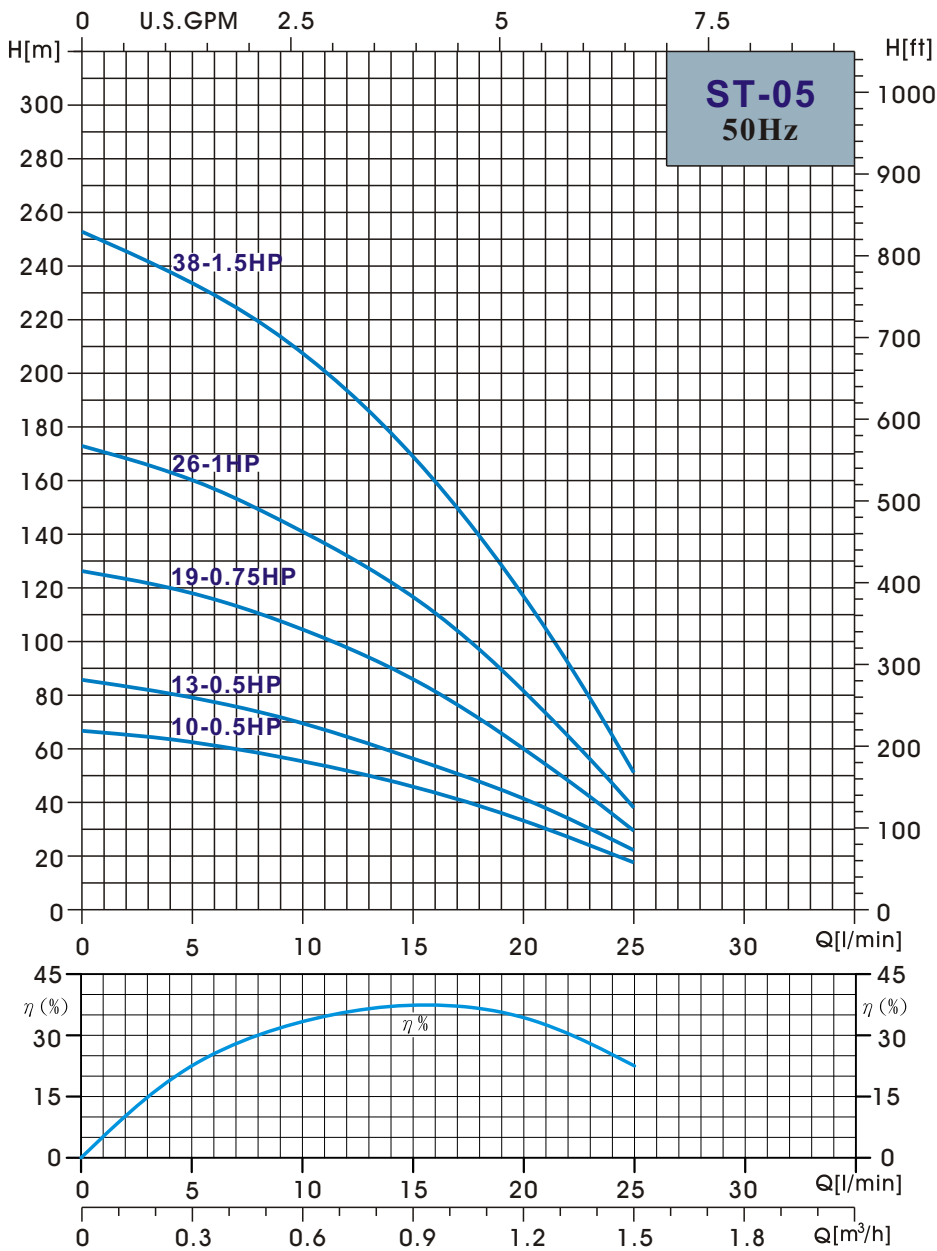

| Selection Chart | | | | | | | | | | | | | | | | | | | | |
|------------------------|--------|-------|------|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------------|--|
| PUMP TYPE | Stages | Motor | | Q=DELIVERY | | | | | | | | | | | | | | | PUMP | |
| | | KW | HP | l/min | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80 | Length (mm) | Weight (kg) | |
| | | | | 0 | 0.3 | 0.6 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.6 | 4.2 | 4.8 | | | |
| H=TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | | |
| ST-0510 | 10 | 0.37 | 0.5 | 67 | 63 | 55 | 46 | 33 | 18 | | | | | | | | | 324 | 3.3 | |
| ST-0513 | 13 | 0.37 | 0.5 | 86 | 78 | 70 | 56 | 42 | 23 | | | | | | | | | 377 | 3.7 | |
| ST-0519 | 19 | 0.55 | 0.75 | 126 | 118 | 105 | 86 | 60 | 30 | | | | | | | | | 481 | 4.7 | |
| ST-0526 | 26 | 0.75 | 1.0 | 173 | 160 | 141 | 117 | 81 | 39 | | | | | | | | | 642 | 5.8 | |
| ST-0538 | 38 | 1.1 | 1.5 | 253 | 234 | 208 | 169 | 117 | 52 | | | | | | | | | 864 | 8.2 | |

ST-10


Performance Curves

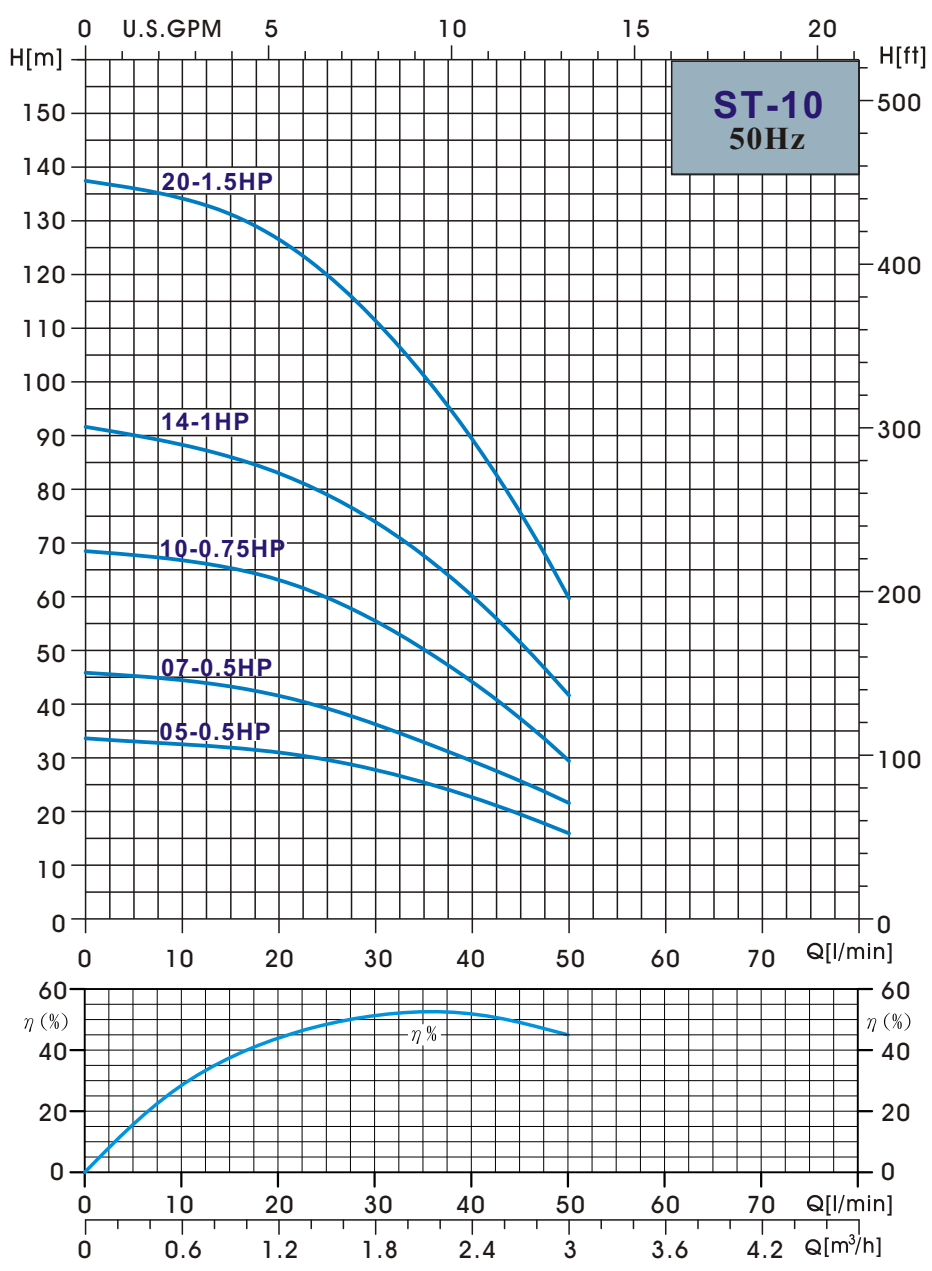

| Selection Chart | | | | | | | | | | | | | | | | | | | | |
|------------------------|--------|-------|------|------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-------------|-------------|
| PUMP TYPE | Stages | Motor | | Q=DELIVERY | | | | | | | | | | | | | | PUMP | | |
| | | | | l/min | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 60 | 70 | | | 80 |
| | | KW | HP | m³/h | 0 | 0.3 | 0.6 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.6 | 4.2 | 4.8 | Length (mm) | Weight (kg) |
| H=TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | | |
| ST-1005 | 5 | 0.37 | 0.5 | 34 | | | | 32 | 31 | 29 | 27 | 25 | 23 | 19 | 16 | | | | 236 | 2.5 |
| ST-1007 | 7 | 0.37 | 0.5 | 46 | | | | 43 | 42 | 39 | 36 | 33 | 29 | 26 | 22 | | | | 271 | 2.8 |
| ST-1010 | 10 | 0.55 | 0.75 | 69 | | | | 65 | 63 | 60 | 55 | 50 | 44 | 37 | 29 | | | | 324 | 3.3 |
| ST-1014 | 14 | 0.75 | 1.0 | 92 | | | | 86 | 83 | 79 | 74 | 67 | 60 | 52 | 42 | | | | 394 | 3.9 |
| ST-1020 | 20 | 1.1 | 1.5 | 139 | | | | 131 | 127 | 120 | 111 | 101 | 90 | 75 | 60 | | | | 499 | 4.9 |

ST-13


Performance Curves

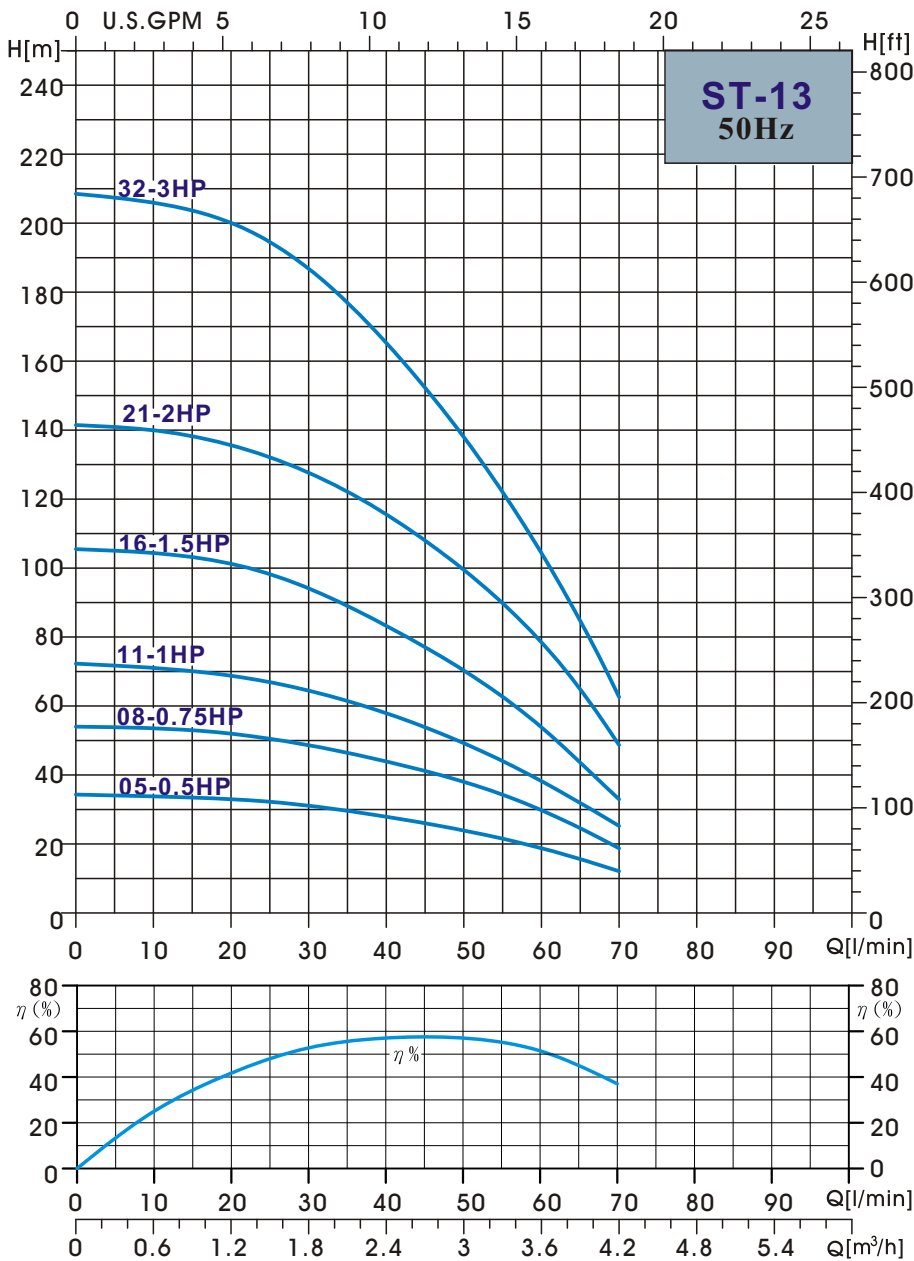

| Selection Chart | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--------|------------------------|------|------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|------|--|
| PUMP TYPE | Stages | Motor | | Q=DELIVERY | | | | | | | | | | | | | | | | PUMP | |
| | | | | l/min | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80 | Length (mm) | | |
| | | KW | HP | m³/h | 0 | 0.3 | 0.6 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.6 | 4.2 | 4.8 | | | |
| | | H=TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | |
| ST-1305 | 5 | 0.37 | 0.5 | 34 | | | | | 32 | 31 | 30 | 29 | 28 | 26 | 24 | 19 | 13 | | 236 | 2.5 | |
| ST-1308 | 8 | 0.55 | 0.75 | 54 | | | | | 51 | 50 | 49 | 46 | 43 | 41 | 38 | 30 | 19 | | 289 | 2.9 | |
| ST-1311 | 11 | 0.75 | 1.0 | 72 | | | | | 68 | 66 | 64 | 61 | 58 | 54 | 49 | 38 | 26 | | 342 | 3.4 | |
| ST-1316 | 16 | 1.1 | 1.5 | 106 | | | | | 101 | 98 | 95 | 89 | 83 | 77 | 70 | 54 | 33 | | 430 | 4.2 | |
| ST-1321 | 21 | 1.5 | 2.0 | 142 | | | | | 135 | 132 | 127 | 122 | 115 | 108 | 100 | 79 | 49 | | 519 | 5.0 | |
| ST-1332 | 32 | 2.2 | 3.0 | 208 | | | | | 200 | 194 | 187 | 177 | 165 | 152 | 138 | 104 | 62 | | 749 | 7.1 | |

Performance Curves


ST-18

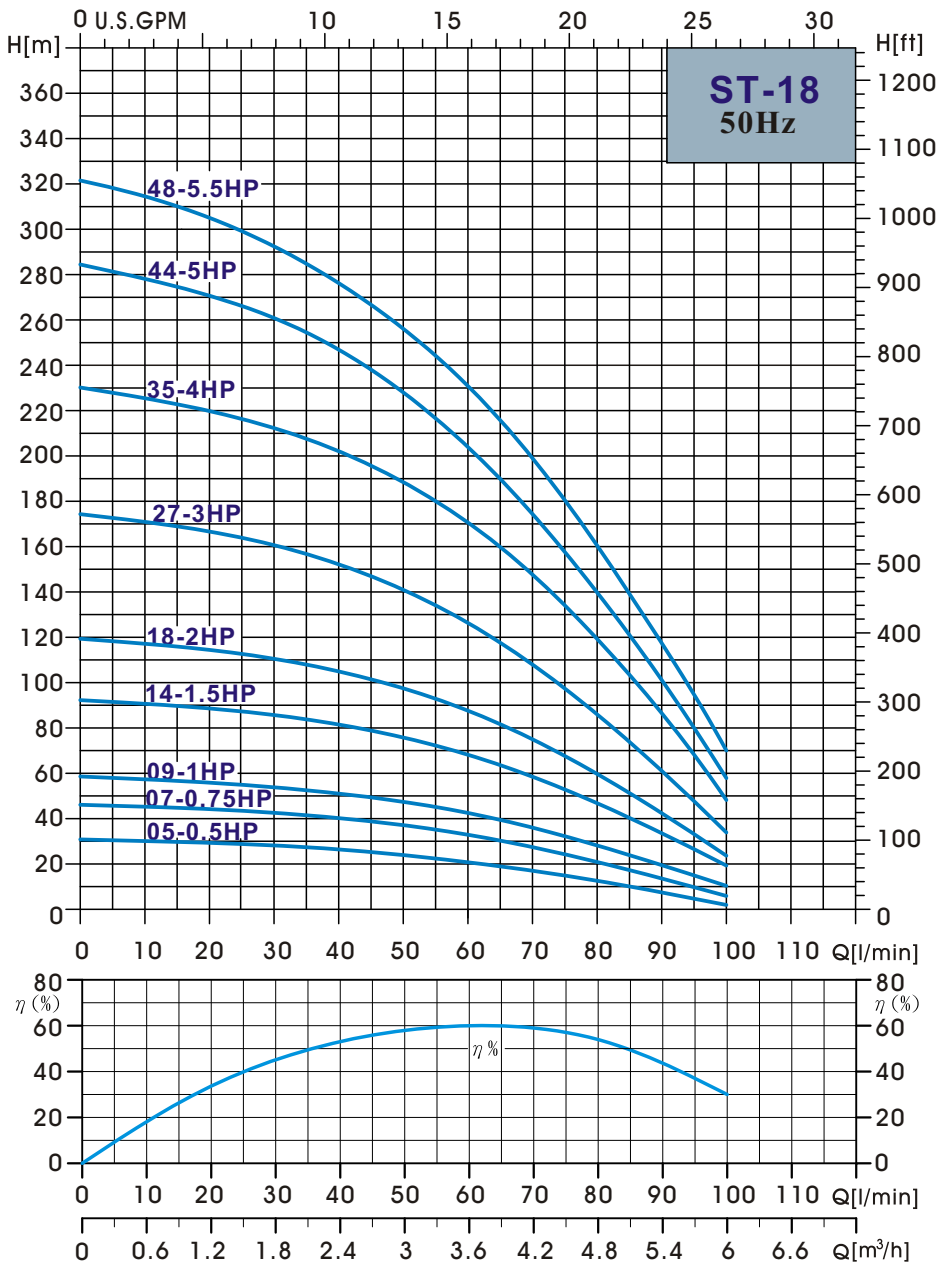

| Selection Chart | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|--------|-------|------|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------------|--|
| PUMP TYPE | Stages | Motor | | Q = DELIVERY | | | | | | | | | | | | | | | | PUMP | |
| | | KW | HP | l/min 0 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80 | 90 | 100 | 120 | Length (mm) | Weight (kg) | |
| | | | | m ³ /h 0 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 | 6.0 | 7.2 | | | |
| H = TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | | | |
| ST-1805 | 5 | 0.37 | 0.5 | 33 | | | 29 | 28 | 27 | 26 | 25 | 24 | 21 | 18 | 13 | 8 | 3 | | 257 | 2.7 | |
| ST-1807 | 7 | 0.55 | 0.75 | 46 | | | 43 | 42 | 41 | 40 | 39 | 37 | 33 | 28 | 21 | 13 | 7 | | 301 | 3.0 | |
| ST-1809 | 9 | 0.75 | 1.0 | 59 | | | 55 | 54 | 52 | 51 | 49 | 47 | 43 | 37 | 28 | 20 | 10 | | 344 | 3.3 | |
| ST-1814 | 14 | 1.1 | 1.5 | 93 | | | 87 | 86 | 83 | 81 | 79 | 76 | 68 | 58 | 47 | 33 | 20 | | 452 | 4.1 | |
| ST-1818 | 18 | 1.5 | 2.0 | 120 | | | 113 | 111 | 108 | 105 | 102 | 98 | 88 | 75 | 60 | 42 | 25 | | 538 | 4.7 | |
| ST-1827 | 27 | 2.2 | 3.0 | 175 | | | 164 | 161 | 157 | 152 | 147 | 141 | 127 | 109 | 87 | 61 | 35 | | 767 | 6.2 | |
| ST-1835 | 35 | 3.0 | 4.0 | 231 | | | 217 | 212 | 208 | 202 | 196 | 189 | 170 | 149 | 120 | 87 | 50 | | 934 | 7.9 | |
| ST-1844 | 44 | 3.7 | 5.0 | 285 | | | 266 | 260 | 254 | 248 | 238 | 229 | 203 | 172 | 139 | 100 | 59 | | 1128 | 9.3 | |
| ST-1848 | 48 | 4.0 | 5.5 | 322 | | | 299 | 292 | 285 | 276 | 267 | 256 | 231 | 199 | 160 | 118 | 70 | | 1253 | 9.9 | |

ST-25


Performance Curves

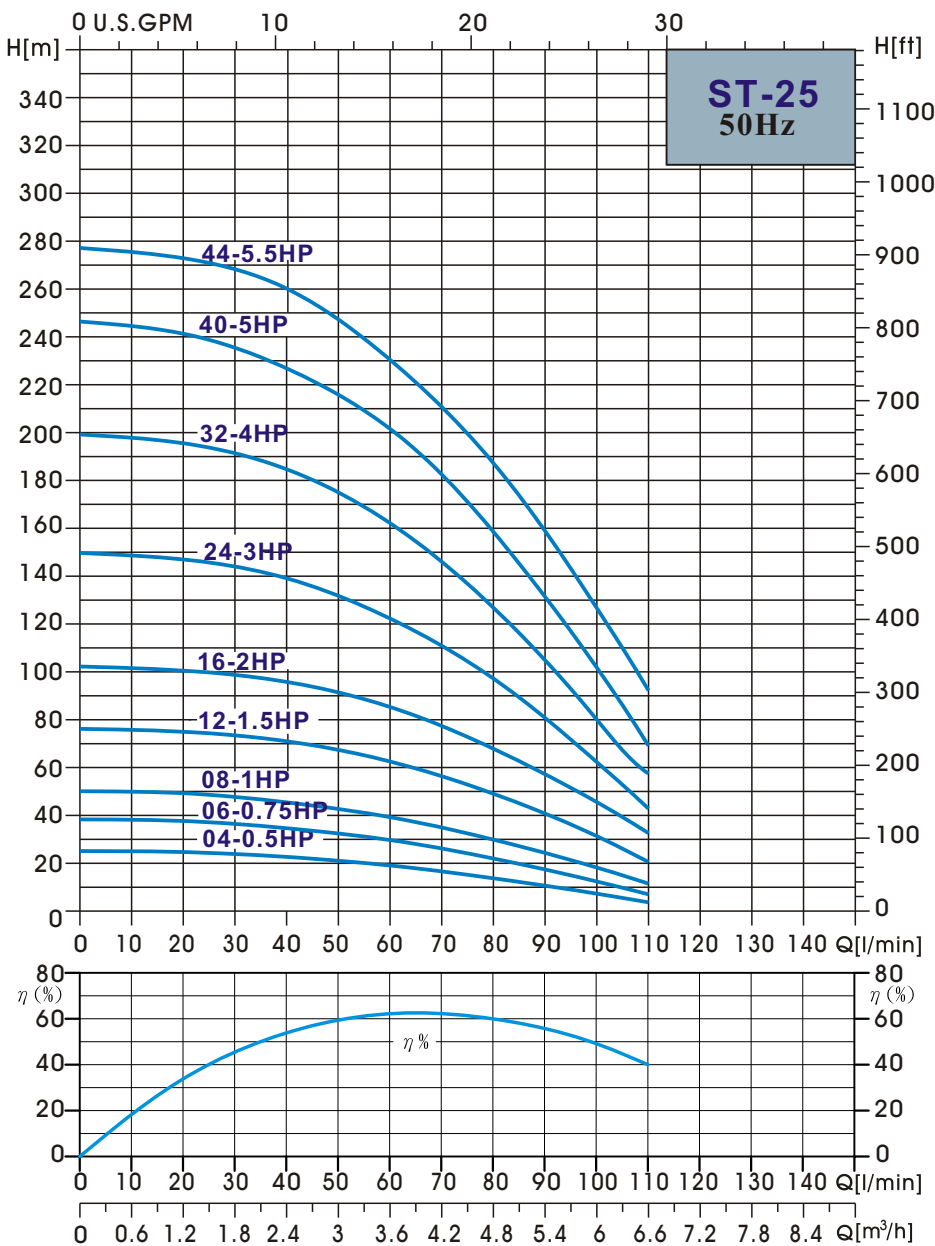

| Selection Chart | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|--------|--------|------|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|------|------|--------|--------|
| PUMP TYPE | Stages | Motor | | Q=DELIVERY | | | | | | | | | | | | | | | | | PUMP | |
| | | | | l/min 0 | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80 | 90 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | Length | Weight |
| | | m³/h 0 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | 12 | 13 | (mm) | (kg) | | |
| H=TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | | | | |
| ST-2504 | 4 | 0.37 | 0.5 | 26 | | 23 | 22 | 22 | 21 | 19 | 17 | 14 | 11 | 7 | | | | | | 247 | 2.4 | |
| ST-2506 | 6 | 0.55 | 0.75 | 38 | | 36 | 35 | 33 | 32 | 30 | 26 | 22 | 18 | 12 | | | | | | 296 | 2.9 | |
| ST-2508 | 8 | 0.75 | 1.0 | 51 | | 47 | 46 | 44 | 43 | 39 | 35 | 30 | 24 | 18 | | | | | | 345 | 3.3 | |
| ST-2512 | 12 | 1.1 | 1.5 | 77 | | 72 | 71 | 69 | 68 | 63 | 57 | 49 | 41 | 31 | | | | | | 433 | 4.1 | |
| ST-2516 | 16 | 1.5 | 2.0 | 102 | | 98 | 96 | 94 | 92 | 86 | 77 | 68 | 57 | 46 | | | | | | 542 | 5.0 | |
| ST-2524 | 24 | 2.2 | 3.0 | 151 | | 142 | 139 | 136 | 132 | 122 | 111 | 97 | 80 | 62 | | | | | | 777 | 6.6 | |
| ST-2532 | 32 | 3.0 | 4.0 | 203 | | 188 | 185 | 180 | 175 | 162 | 146 | 127 | 105 | 80 | | | | | | 965 | 8.7 | |
| ST-2540 | 40 | 3.7 | 5.0 | 253 | | 232 | 227 | 222 | 216 | 202 | 182 | 159 | 131 | 102 | | | | | | 1160 | 10.4 | |
| ST-2544 | 44 | 4.0 | 5.5 | 278 | | 265 | 260 | 254 | 247 | 230 | 210 | 187 | 159 | 127 | | | | | | 1296 | 11.2 | |

ST-35


Performance Curves

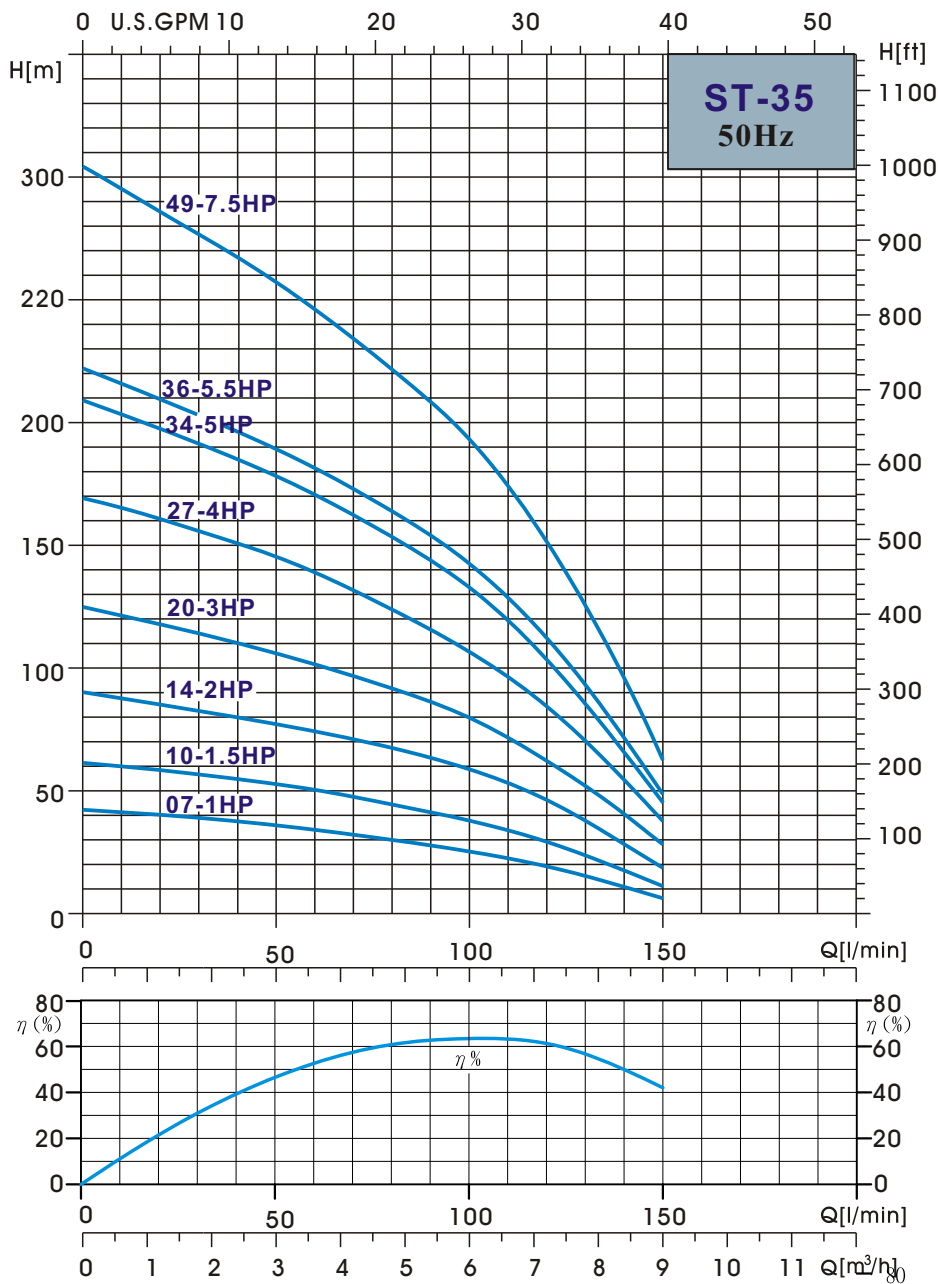

| Selection Chart | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|--------|-------|-----|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|------|--------|--------|--|--|--|--|--|------|------|
| PUMP TYPE | Stages | Motor | | Q = DELIVERY | | | | | | | | | | | | | | | | PUMP | | | | | | | | | |
| | | | | l/min | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80 | 90 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | Length | Weight | | | | | | | |
| | | KW | HP | m³/h | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | 12 | 13 | (mm) | (kg) | | | | | | | |
| H = TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ST-3507 | 7 | 0.75 | 1.0 | 42 | | | | | | 36 | 34 | 32 | 30 | 28 | 25 | 19 | 11 | | | | | | | | | | | 390 | 3.7 |
| ST-3510 | 10 | 1.1 | 1.5 | 62 | | | | | | 53 | 51 | 48 | 45 | 41 | 38 | 29 | 18 | | | | | | | | | | | 483 | 4.6 |
| ST-3514 | 14 | 1.5 | 2.0 | 90 | | | | | | 77 | 74 | 71 | 68 | 63 | 59 | 46 | 28 | | | | | | | | | | | 607 | 5.7 |
| ST-3520 | 20 | 2.2 | 3.0 | 125 | | | | | | 107 | 102 | 97 | 92 | 86 | 80 | 62 | 40 | | | | | | | | | | | 831 | 7.5 |
| ST-3527 | 27 | 3.0 | 4.0 | 169 | | | | | | 145 | 139 | 131 | 123 | 115 | 107 | 84 | 55 | | | | | | | | | | | 1048 | 9.6 |
| ST-3534 | 34 | 3.7 | 5.0 | 208 | | | | | | 178 | 170 | 162 | 153 | 143 | 132 | 103 | 66 | | | | | | | | | | | 1257 | 11.6 |
| ST-3536 | 36 | 4.0 | 5.5 | 221 | | | | | | 190 | 181 | 173 | 164 | 154 | 143 | 112 | 72 | | | | | | | | | | | 1318 | 12.2 |
| ST-3549 | 49 | 5.5 | 7.5 | 302 | | | | | | 257 | 246 | 234 | 222 | 209 | 193 | 151 | 96 | | | | | | | | | | | 1802 | 15.9 |

ST-40


Performance Curves

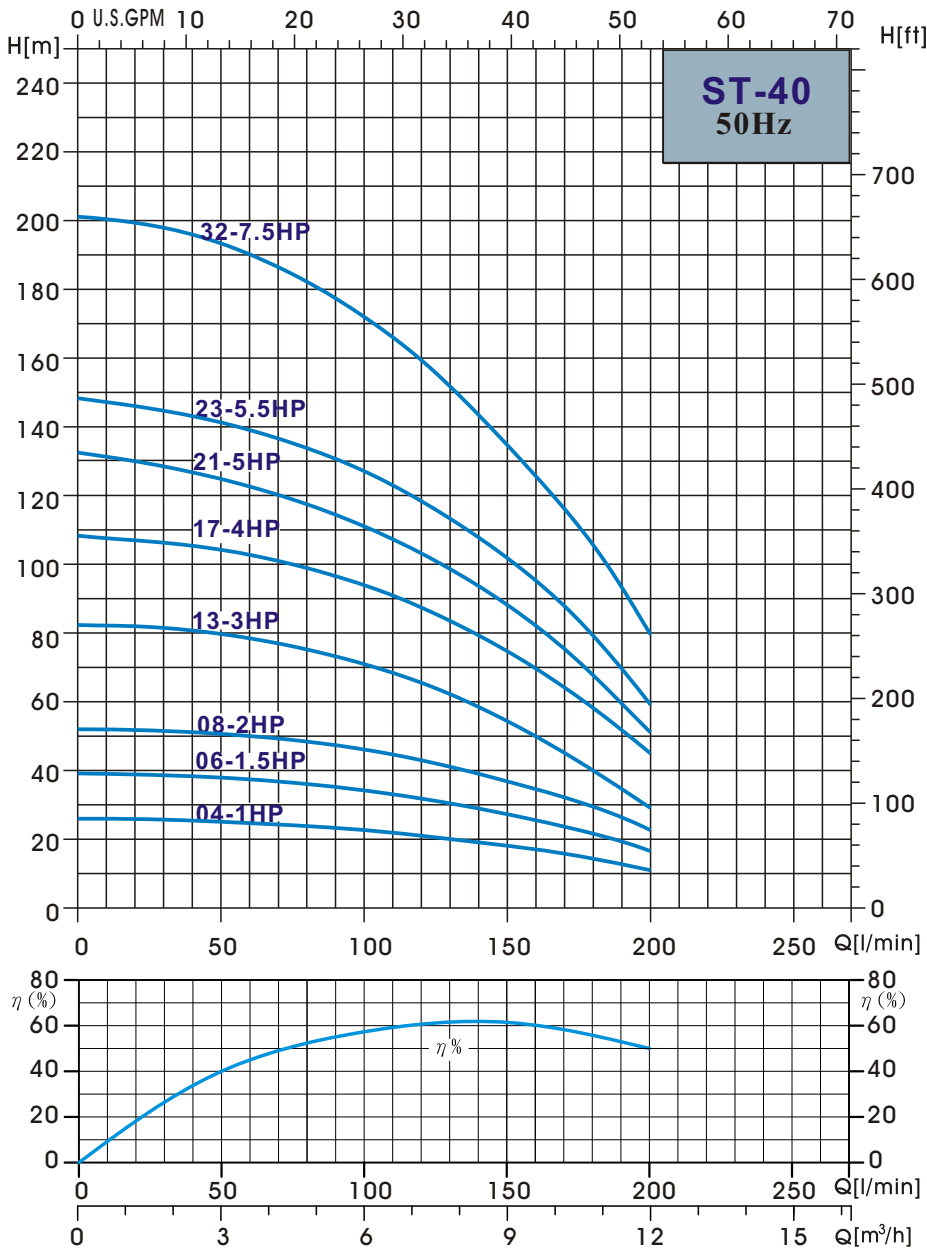

| Selection Chart | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|--------|-------|-----|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|------|-------------|-------------|------|------|
| PUMP TYPE | Stages | Motor | | Q=DELIVERY | | | | | | | | | | | | | | | | PUMP | | | | |
| | | | | l/min 0 | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80 | 90 | 100 | 120 | 140 | 160 | 180 | 200 | | | 220 | | |
| | | KW | HP | m³/h 0 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | 12 | 13 | Length (mm) | Weight (kg) | | |
| H=TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | | | | | | |
| ST-4004 | 4 | 0.75 | 1.0 | 26 | | | | | | | | | | 24 | 23 | 22 | 21 | 19 | 17 | 15 | 12 | | 294 | 2.8 |
| ST-4006 | 6 | 1.1 | 1.5 | 39 | | | | | | | | | | 36 | 35 | 34 | 32 | 29 | 26 | 22 | 17 | | 356 | 3.4 |
| ST-4008 | 8 | 1.5 | 2.0 | 52 | | | | | | | | | | 48 | 47 | 46 | 43 | 39 | 35 | 29 | 24 | | 418 | 4.0 |
| ST-4013 | 13 | 2.2 | 3.0 | 82 | | | | | | | | | | 75 | 73 | 71 | 66 | 59 | 50 | 40 | 30 | | 573 | 5.5 |
| ST-4017 | 17 | 3.0 | 4.0 | 108 | | | | | | | | | | 98 | 96 | 94 | 87 | 79 | 70 | 58 | 46 | | 697 | 6.6 |
| ST-4021 | 21 | 3.7 | 5.0 | 132 | | | | | | | | | | 117 | 114 | 111 | 103 | 93 | 82 | 68 | 52 | | 859 | 7.8 |
| ST-4023 | 23 | 4.0 | 5.5 | 148 | | | | | | | | | | 134 | 131 | 127 | 118 | 108 | 95 | 79 | 60 | | 921 | 8.4 |
| ST-4032 | 32 | 5.5 | 7.5 | 202 | | | | | | | | | | 182 | 178 | 172 | 160 | 143 | 125 | 105 | 80 | | 1238 | 11.0 |

ST-55

Performance Curves

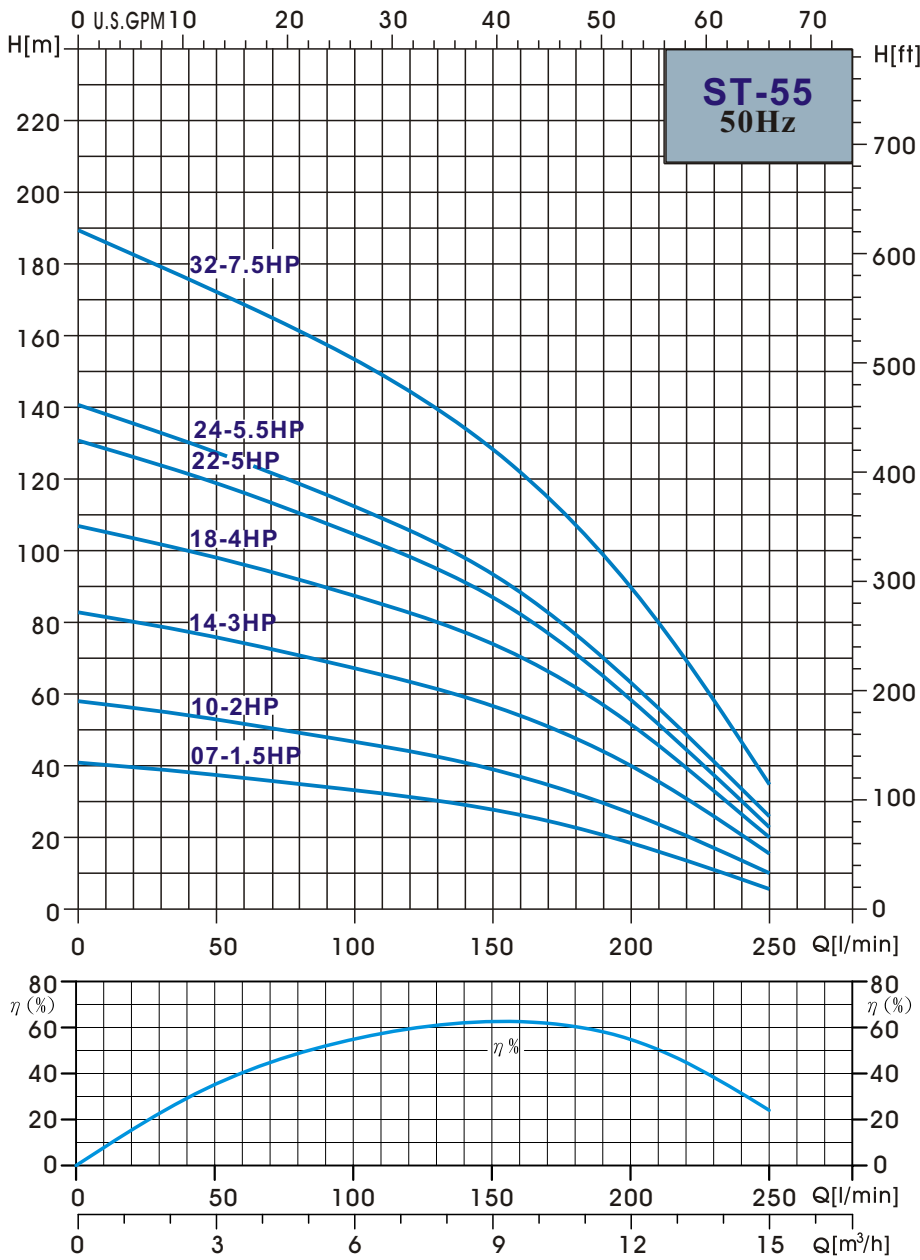


Selection Chart

| PUMP TYPE | Stages | Motor | | Q=DELIVERY | | | | | | | | | | | | | | | | | PUMP | |
|-----------|--------|-------|-----|------------------------|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|------|-----|-----|-----|-----|-----|--------|--------|
| | | | | l/min | 70 | 80 | 90 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | | |
| | | | | 0 | 4.2 | 4.8 | 5.4 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | 12 | 13 | 14.4 | 16 | 17 | 18 | 19 | 20 | | |
| | | | | H=TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | Length | Weight |
| | | | | 0 | 4.2 | 4.8 | 5.4 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | 12 | 13 | 14.4 | 16 | 17 | 18 | 19 | 20 | (mm) | (kg) |
| ST-5507 | 7 | 1.1 | 1.5 | 41 | | 35 | 34 | 33 | 32 | 29 | 26 | 23 | 18 | 14 | 8 | | | | | | 537 | 5.3 |
| ST-5510 | 10 | 1.5 | 2.0 | 58 | | 49 | 48 | 47 | 44 | 41 | 37 | 32 | 27 | 20 | 13 | | | | | | 693 | 6.7 |
| ST-5514 | 14 | 2.2 | 3.0 | 83 | | 71 | 69 | 67 | 63 | 58 | 54 | 48 | 40 | 31 | 20 | | | | | | 901 | 8.5 |
| ST-5518 | 18 | 3.0 | 4.0 | 107 | | 92 | 90 | 87 | 83 | 77 | 70 | 62 | 52 | 39 | 26 | | | | | | 1147 | 10.4 |
| ST-5522 | 22 | 3.7 | 5.0 | 131 | | 110 | 107 | 104 | 98 | 91 | 82 | 71 | 58 | 45 | 30 | | | | | | 1345 | 12.3 |
| ST-5524 | 24 | 4.0 | 5.5 | 141 | | 118 | 116 | 113 | 106 | 97 | 88 | 77 | 63 | 49 | 33 | | | | | | 1449 | 13.2 |
| ST-5532 | 32 | 5.5 | 7.5 | 189 | | 162 | 157 | 153 | 144 | 134 | 122 | 107 | 90 | 70 | 47 | | | | | | 1866 | 17 |

ST-60


Performance Curves

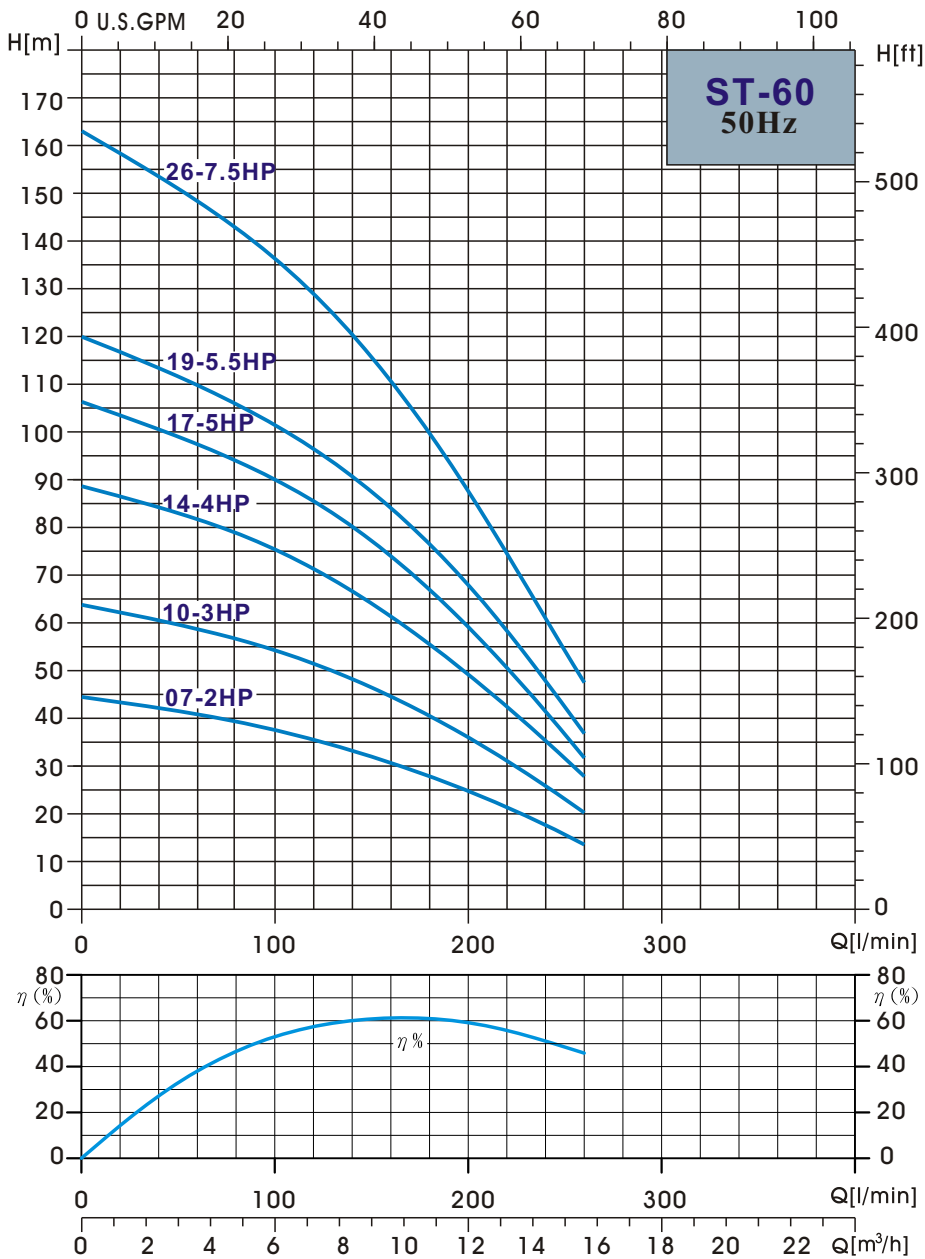

| Selection Chart | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|--------|-------|-----|------------|-----|-----|-----|-----|-----|-----|------|-----|-----|------|-----|-----|-----|-----|-----|-----|-------------|-------------|
| PUMP TYPE | Stages | Motor | | Q=DELIVERY | | | | | | | | | | | | | | | | | PUMP | |
| | | KW | HP | l/min | 80 | 90 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | 360 | Length (mm) | Weight (kg) |
| | | | | m³/h | 4.8 | 5.4 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | 12 | 13 | 14.4 | 16 | 17 | 18 | 19 | 20 | 22 | | |
| H=TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | | | | |
| ST-6007 | 7 | 1.5 | 2.0 | 45 | | | 37 | 36 | 33 | 31 | 28 | 25 | 22 | 18 | 14 | | | | | | 534 | 5.3 |
| ST-6010 | 10 | 2.2 | 3.0 | 64 | | | 54 | 52 | 48 | 44 | 41 | 36 | 32 | 26 | 20 | | | | | | 690 | 6.7 |
| ST-6014 | 14 | 3.0 | 4.0 | 89 | | | 76 | 72 | 67 | 62 | 56 | 49 | 43 | 35 | 28 | | | | | | 989 | 8.6 |
| ST-6017 | 17 | 3.7 | 5.0 | 107 | | | 90 | 86 | 80 | 74 | 67 | 59 | 51 | 42 | 32 | | | | | | 1092 | 10.1 |
| ST-6019 | 19 | 4.0 | 5.5 | 120 | | | 102 | 97 | 91 | 89 | 76 | 68 | 58 | 48 | 37 | | | | | | 1195 | 11.0 |
| ST-6026 | 26 | 5.5 | 7.5 | 163 | | | 136 | 129 | 120 | 111 | 100 | 87 | 75 | 61 | 48 | | | | | | 1559 | 14.3 |

ST-80

Performance Curves

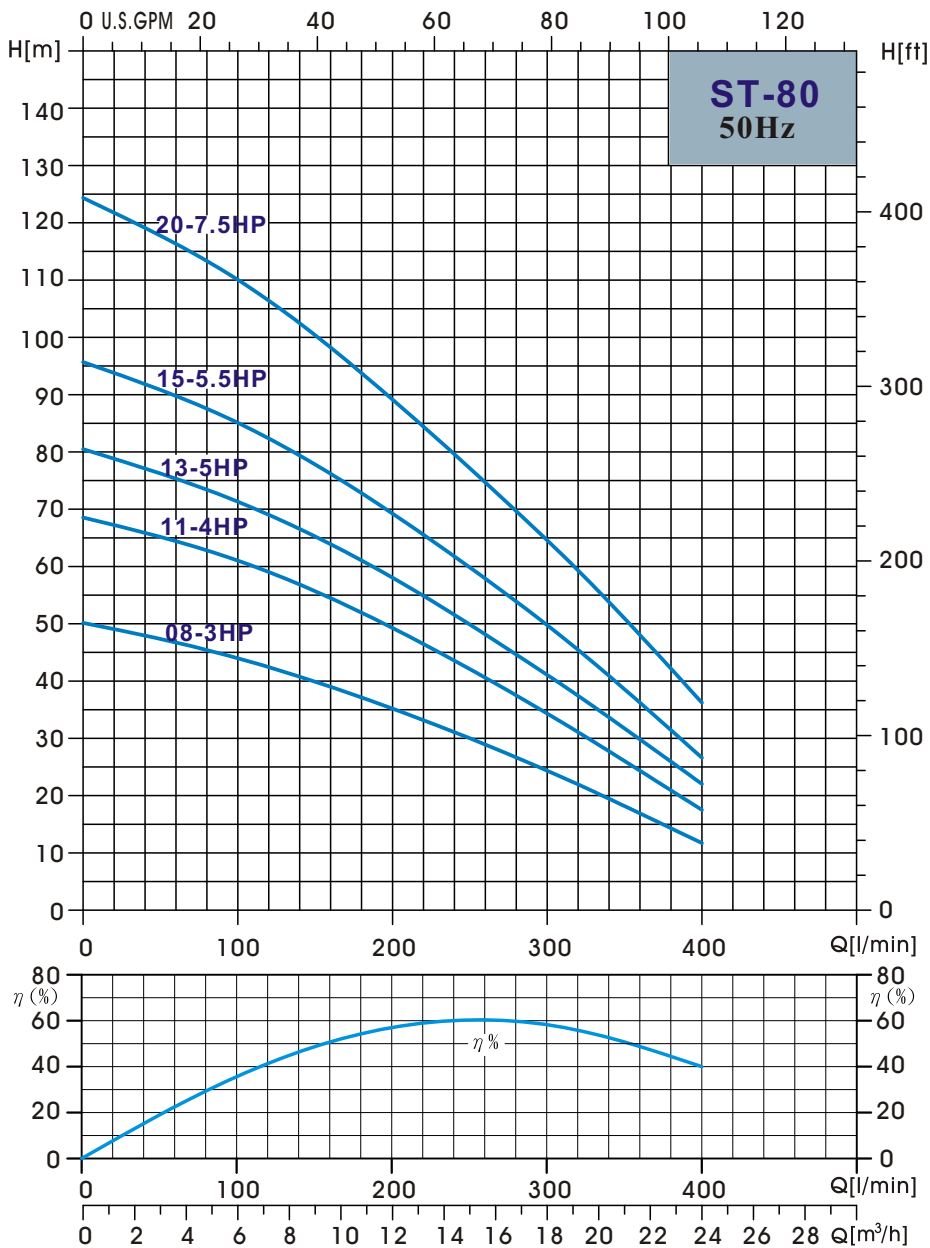

| Selection Chart | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|--------|--------|-----|------------|-----|-----|------|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------------|------|------|--|
| PUMP TYPE | Stages | Motor | | Q=DELIVERY | | | | | | | | | | | | | | | | | | | PUMP | |
| | | | | l/min 0 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | 360 | 380 | 400 | 450 | | | |
| | | m³/h 0 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | 12 | 13 | 14.4 | 16 | 17 | 18 | 19 | 20 | 22 | 23 | 24 | 27 | Length (mm) | Weight (kg) | | | |
| H=TOTAL HEAD IN METERS | | | | | | | | | | | | | | | | | | | | | | | | |
| ST-8008 | 8 | 2.2 | 3.0 | 51 | | | 41 | 39 | 37 | 35 | 33 | 31 | 29 | 27 | 24 | 22 | 20 | 17 | 14 | 12 | 676 | 6.3 | | |
| ST-8011 | 11 | 3.0 | 4.0 | 70 | | | 57 | 54 | 52 | 49 | 47 | 44 | 41 | 38 | 34 | 31 | 28 | 24 | 21 | 18 | 880 | 8.1 | | |
| ST-8013 | 13 | 3.7 | 5.0 | 81 | | | 67 | 64 | 61 | 58 | 55 | 52 | 48 | 45 | 41 | 38 | 34 | 30 | 26 | 22 | 1013 | 9.3 | | |
| ST-8015 | 15 | 4.0 | 5.5 | 97 | | | 79 | 76 | 73 | 69 | 66 | 63 | 58 | 54 | 50 | 46 | 41 | 36 | 32 | 27 | 1149 | 10.5 | | |
| ST-8020 | 20 | 5.5 | 7.5 | 125 | | | 102 | 98 | 94 | 89 | 84 | 79 | 74 | 70 | 65 | 60 | 54 | 48 | 43 | 37 | 1489 | 13.5 | | |

The discharge and the intake/adapters are precision machined cast 304 stainless steel, with NEMA mounting specifications.

The discharge has a built-in check valve.

The pump body is covered by a 304 polished stainless steel shell.

The shafts are made from hex 304 stainless steel bar material.

Shafts for pumps with 19 and fewer stages are supplied with one shaft bearing. Shafts for pumps with more than 19 stages are supplied with two shaft bearings.

Impellers are floating type. (floating impeller design pumps require less starting torque, and are less affected by sand or other abrasive materials in water).

Impellers are made of Noryl®.

Diffusers are made of polycarbonate.

Built-in 304 stainless steel strainer.

Couplings are made from sintered 304 stainless steel material, with NEMA specifications.

The brand Noryl® is owned by GE in U.S.



STAIRS

STAIRS INDUSTRIAL CO.,LTD.
Company



motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX

Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com