

WEMCO SELF PRIMER

Solids Handling Self Primer Pumps

Pump Sizes: 3", 4", 6", 8", and 10"

Rugged and Dependable Trash Pumps

Excellent
Power & Industrial
Solutions



**Now A
Standard Upgrade
On All Pumps!**



motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX

Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com



WEMCO® Self-Primer The Market Leader

Check the boxes of the features you want in a self-priming pump - add up the score at the bottom

| Other Self-Priming Pumps | ✓ |
|--|---|
| • Steel Shaft | |
| • Ductile Iron Impeller | |
| • Cast Iron Casing | |
| • Cast Iron Bearing Housing | |
| • Cast Iron Cover Plate | |
| • Tools needed to adjust Impeller | |
| • Not all sizes pass stated solid size | |
| • Shimless impeller adjustment | |
| Total | ✓ |

| ✓ | WEMCO Self-Primer |
|---|--|
| | • Stainless Steel 17-4PH Shaft |
| | • Cast Steel, High Chrome or CD4MCu Impeller |
| | • Ductile Iron Casing |
| | • Ductile Iron Fill Port Cover |
| | • Tool-less impeller adjustment |
| | • Passes stated solid size |
| | • Shim-less impeller adjustment |
| | • Higher actual efficiency |
| | • Solid Silicone Carbide Seal faces |
| | • More rugged & dependable |
| | • Lower "life cycle costs" |
| | • Industry leading 66 month warranty |
| | • Advanced safety features |
| | • Higher operating pressure |
| | • Directly interchangeable parts |
| | • Pump interchangeability |
| | Total |

Add it up... You'll see why the
WEMCO Self-Primer offers more value...

- ✓ Materials/Design ✓ Ease of Maintenance
- ✓ Pump Features ✓ Safety Features
- ✓ More Dependable ✓ Lower Operating Cost



3"/75 mm

Head to: 112' • 34 M
Flow to: 450 GPM • 102 M³/hr
Solids size: 2.5 inch • 63.5 mm



4"/100 mm

Head to: 115' • 35 M
Flow to: 730 GPM • 165 M³/hr
Solids size: 3 inch • 75 mm



6"/150 mm

Head to: 109' • 33 M
Flow to: 1,480 GPM • 335 M³/hr
Solids size: 3 inch • 75 mm



8"/200 mm

Head to: 109' • 33 M
Flow to: 2,600 GPM • 600 M³/hr
Solids size: 3 inch • 75 mm



10"/250 mm


Head to: 129' • 39 M
Flow to: 3,200 GPM • 725 M³/hr
Solids size: 3 inch • 75 mm

Pump & Parts directly interchangeable with many GRESKO®, Pioneer® and Gorman-Rupp® pumps.



WEMCO® Self-Primer
True Solids Handling Pumps From The Start!


You were born with the only tools you need to adjust the clearances of WSP pumps. Your hands! NO tools are required for clean-out or impeller clearance adjustment!

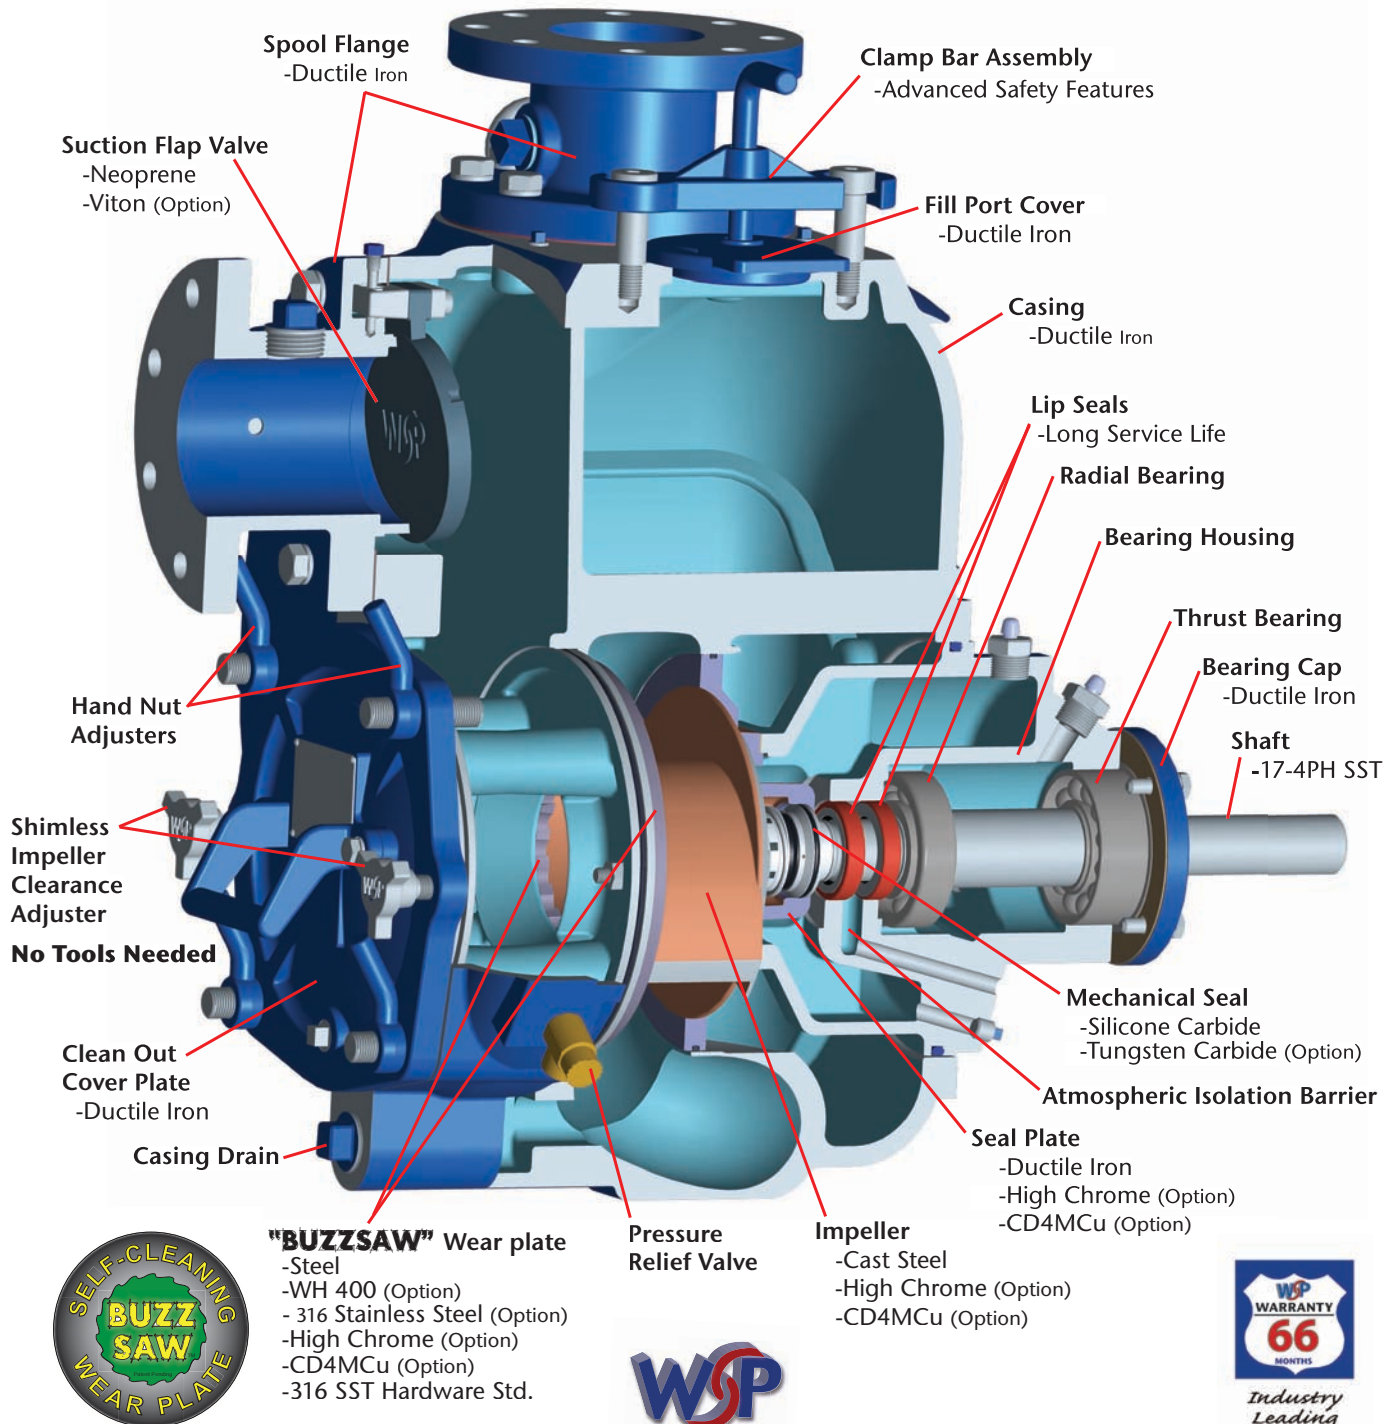

Applications: • Sewage • Animal Waste • Industrial Waste • Dewatering • Mining • Winery
• Automotive • Beef/Pork/Poultry Processing • Pulp & Paper • Other Industrial Applications



WEMCO® Self-Primer
Operating Range

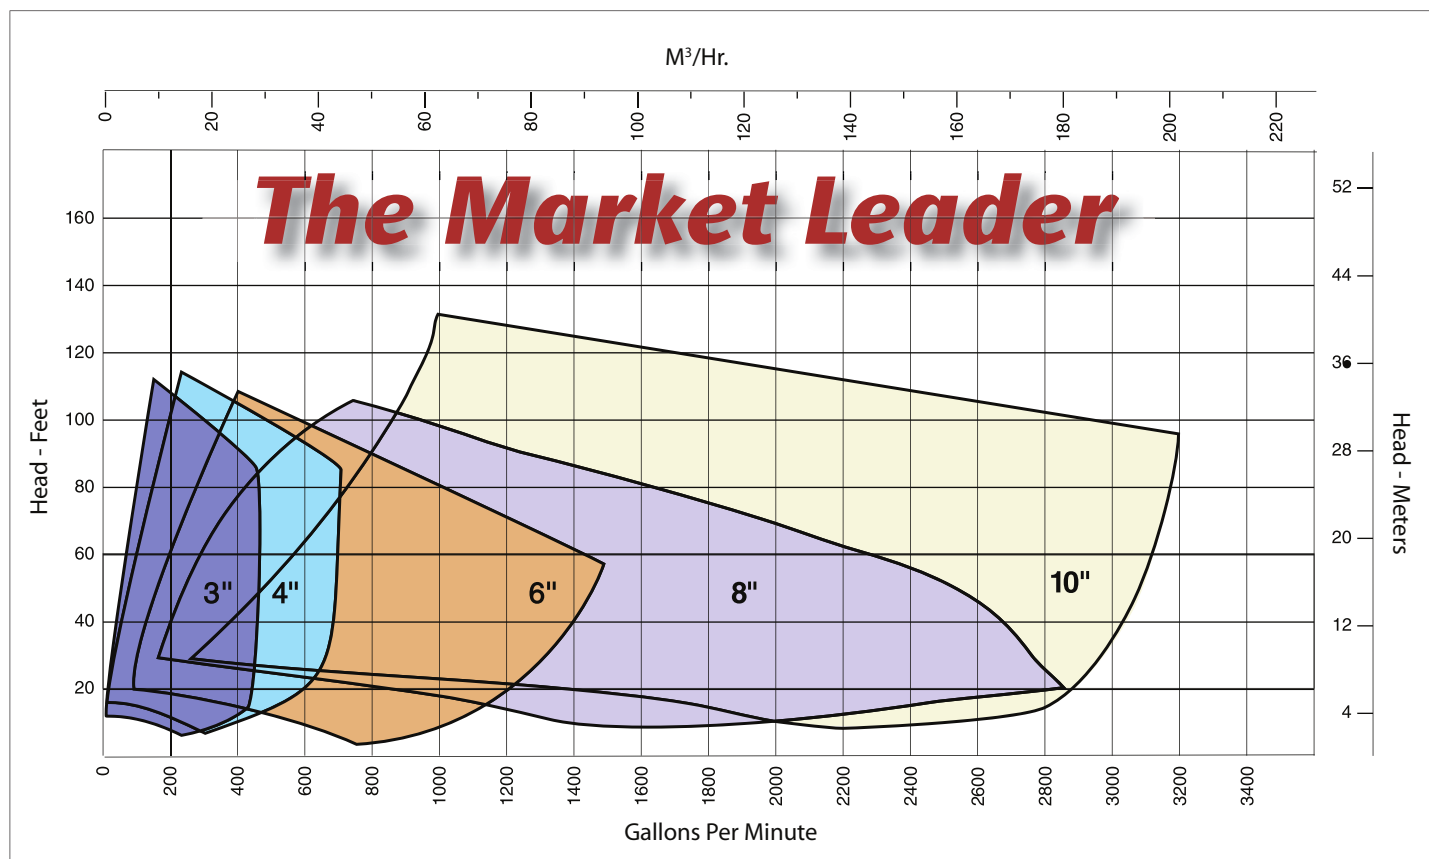

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com

Excellent
Power & Industrial
Solutions

