



# HYDRA-TECH PUMPS

## PORTABLE HYDRAULIC POWER UNIT

### MODEL HT60DCV



This popular unit features a Deutz air-cooled diesel engine and pressure compensated hydraulic pump for maximum versatility and enhanced performance when driving our submersible pumps.

## FEATURES

- Highway Trailer Chassis with Built-In Fuel Tank and Independent Suspension
- Single Point Lifting Bracket and Tie Downs for Transport
- Automatic Engine Safety Shutdown
- Variable Piston Hydraulic Pump
- Efficient Hydraulic Oil Cooler
- Spin-On Return Filter w/Indicator
- Variable Speed Control
- Tank Top Filler/ Strainer
- System Relief Valve
- Pressure Control Valve
- Liquid Filled Pressure Gauge
- Fluid Level/ Temperature Gauge

### OPTIONS

- D.O.T. Brakes and Lights
- Skid Frame
- Multiple Hydraulic Circuits
- Other Flow and Pressure Combinations

D0109




**motralec**

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX  
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / e-mail : [service-commercial@motralec.com](mailto:service-commercial@motralec.com)

[www.motralec.com](http://www.motralec.com)

## Model HT60DCV Overall Dimensions

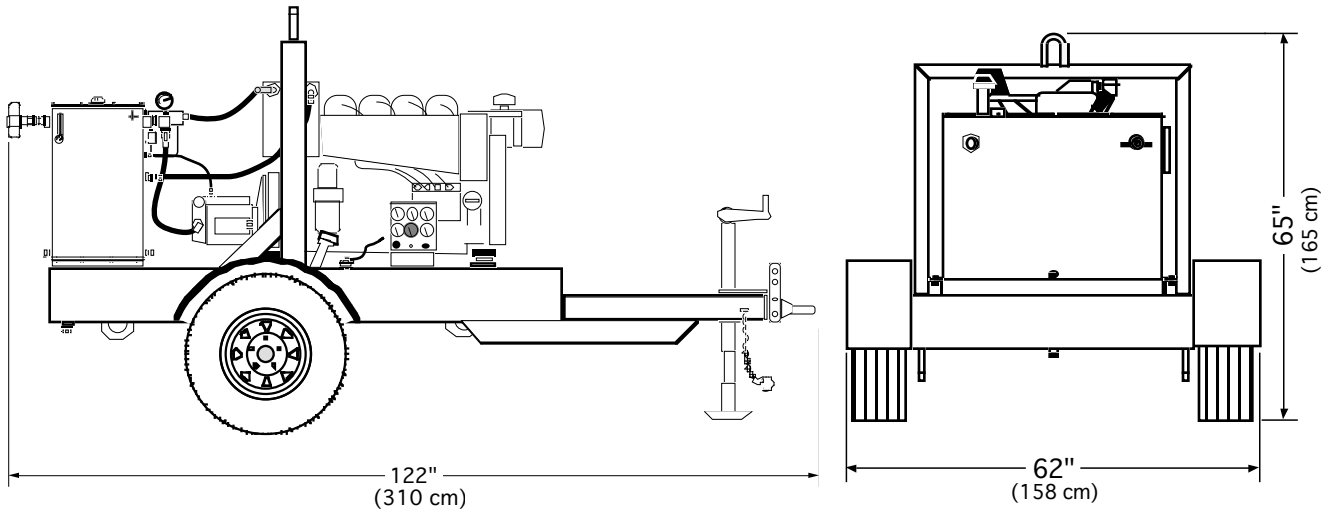

## SPECIFICATIONS

ENGINE:..... Deutz D914L04 Air-Cooled Diesel (Tier 3)  
HORSEPOWER:..... 70 @ 2300 RPM  
HYDRAULIC OUTPUT\*:..... Variable, Max. 26 GPM (98 LPM)  
OPERATING PRESSURE\*:..... Maximum 2900 PSI (197 Bar)  
HOSE PORT SIZE:..... 1" NPT  
HYDRAULIC OIL:..... SAE 10W or 20W Type AW  
also: Biodegradable oil (Consult Factory)  
OIL FILTRATION:..... 10 Micron (Standard)  
OIL RESERVOIR CAPACITY:..... 50 U.S. Gallons (190 Liters)  
FUEL TANK CAPACITY:..... 49 U.S. Gallons (186 Liters)  
FUEL CONSUMPTION:..... Approx. 2.2 U.S. Gal/Hr (8.3 Liters/Hr)  
DIMENSIONS:..... H 65" (165 cm) x W 62" (158 cm) x L 122" (310 cm)  
WEIGHT (Dry):..... 2240 lbs. (1015 kg)

\* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.