

★★★★★ 4,7/5 sur +600 avis Google . Depuis 1976 . 3 agences : Herblay (95), Sèvres (92), Étréchy (91) . www.motralec.com

Fiche produit Motralec Arven SPA - fiche technique | Motralec
■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

POMPE IN PLASTICA - PLASTIC PUMPS

SPA

ELETTROPOMPE SOMMERGIBILI IN PLASTICA DRENAGGIO PER ACQUE CHIARE
PLASTIC SUBMERSIBLE PUMPS FOR WHITE WATER DRAINAGE



APPLICAZIONI

- SVUOTAMENTO DA ACQUE PIOVANE D'INFILTRAZIONE, DI POZZETTI O VASCHE DI RACCOLTA
- PRELIEVO DA VASCHE DI RACCOLTA DI ACQUE PIOVANE PER PICCOLE IRRIGAZIONI A SCORRIMENTO DI ORTI E GIARDINI.
- TRAVASO DI ACQUA CHIARA DA SERBATOI E VASCHE


APPLICATIONS

- RAIN, SEEPAGE, SUMP PIT AND CATCH TANK WATER PUMP OUT
- GARDEN AND VEGETABLE GARDEN MINI FLOOD IRRIGATION SYSTEM RAIN WATER CATCH TANK PUMP DOWN
- WHITE WATER PUMP OVER FROM RESERVOIRS AND VATS

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / e-mail : service-commercial@motralec.com
www.motralec.com

DRENAGGIO / DRAINAGE

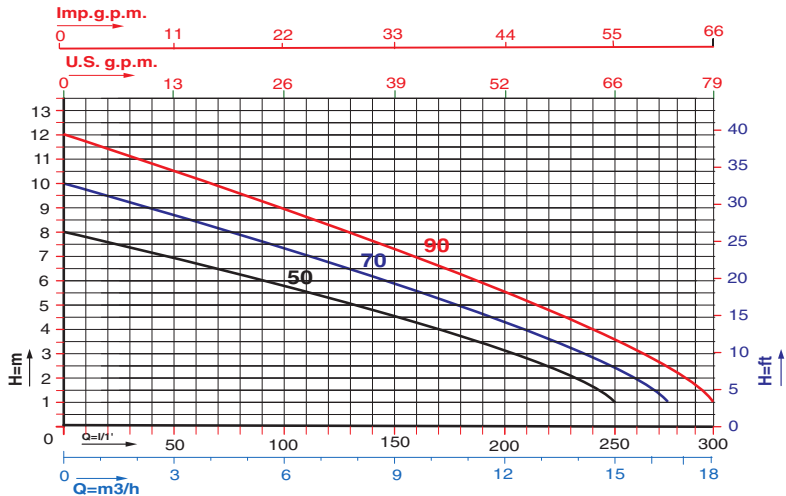


CARATTERISTICHE COSTRUTTIVE:

Corpo pompa: PP30FV
Motore: Raffreddato ad acqua/cassa lega G-Al Si 9
Albero motore: Acciaio inox AISI F - Terminale in ceramica (SPA 700) con camera d'olio
Classe isolamento: F
Classe protezione: IP 68
Tenuta: Paraoli ad alta resistenza
Utilizzo: Intermittente (SPA 300-SPA 500)

MAIN FEATURES:

Pump body: PP30FV
Motor: Water cooled/casing made of G-Al Si 9 alloy
Motor shaft: Stainless steel AISI 430 F - Ceramic shaft terminal (SPA 700) with oil chamber
Insulation class: F
Protection class: IP 68
Seal: High resistant lip seals
Duty: Intermittant (SPA 300-SPA 500)

DIMENSIONI/Dimensions								
TYPE	DNA	DNM	a	b	c	d	e	f
SPA 50	-	M1"1/4"	400	152	132	50	285	395
SPA 70	-	F1"1/4"	400	152	132	70	311	440
SPA 90	-	F1"1/4"	400	152	132	70	311	440



DATI ELETTRICI / ELECTRICAL DATA								IMBALLO/Packaging				
TYPE	HP (P2)	KW (P2)	KW (P1)	230V 50Hz ~1	µF	r.p.m.	Temp Max	L	N	M	Kg	Q.ty euro pallett
SPA 50	0,60	0,45	0,57	2,55	8	2800	35°C	220	370	170	5,2	100
SPA 70	0,80	0,60	0,76	3,45	12	2800	35°C	220	370	170	6,7	100
SPA 90	1,1	0,80	0,96	4,20	16	2800	35°C	220	370	170	7,8	100



Besoin d'un prix ou d'un conseil technique ?

Arven SPA

★★★★★ 4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

DEMANDER UN PRIX >