

S20 V2TT MPSU



2 pompes MPSU à vitesse variable - VARIOMAT2TT



S20 V2TT MPSU505


	Référence	€ HT	Débit maxi en m³/h	Pression en bars		400 Volts	
				Mini	Maxi	kW	A
A	S20 V2TT MPSU304	5841	9	1.6	4.4	2 x 0.55	2 x 1.6
B	S20 V2TT MPSU305	5924		1.9	5.3	2 x 0.75	2 x 1.9
C	S20 V2TT MPSU306	6084		2.3	6.5	2 x 0.90	2 x 2.2
D	S20 V2TT MPSU504	6315	16	1.3	4.3	2 x 0.90	2 x 2.2
E	S20 V2TT MPSU505	6451		1.3	5.3	2 x 1.10	2 x 2.6
F	S20 V2TT MPSU506	6568		1.6	6.6	2 x 1.10	2 x 2.8

	Réservoir à diaphragme 10 bars CE	Aspiration DN 1		Refoulement DN 2		VARIOMAT2 400 Volts	Dimensions mm			Poids kg
		Vannes	Collecteurs	Vannes et clapets	Collecteurs		Lg	I	Ht	
A	PWB 18L10	1"1/4	2"	1"	1"1/2	9TT	600	406	1702	55
B									1757	61
C									1775	63
D	PEB 24LX10	1"1/2	2"1/2	1"1/4	2"	9TT	600	484	1840	64
E									1864	65
F									1933	67

Pompes MPSU : page 15 - VARIOMAT2TT : page 305 - Réservoir : page 185.

SURPRESSION

S20 V2TT MXV-B 2 pompes MXV-B à vitesse variable - VARIOMAT2TT

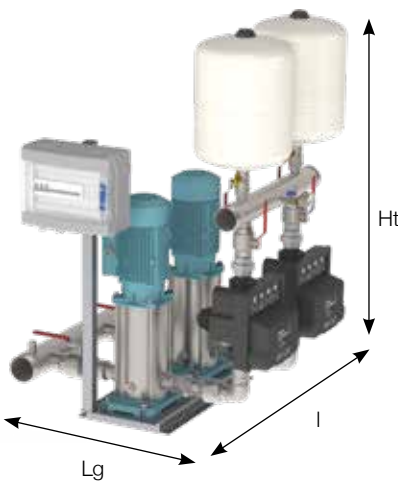


S20 V2TT MXV-B40-805

	Référence	€ HT	Débit maxi en m³/h	Pression en bars		400 Volts	
				Mini	Maxi	kW	A
A	S20 V2TT MXV-B25-204	6459	9	1.7	4.4	2 x 0.75	2 x 1.9
B	S20 V2TT MXV-B32-404	6737	16	1.45	4.5	2 x 1.10	2 x 2.7
C	S20 V2TT MXV-B32-406	6892		2.25	6.8	2 x 1.50	2 x 4.3
D	S20 V2TT MXV-B40-803	8047	26	1.55	3.55	2 x 1.10	2 x 2.7
E	S20 V2TT MXV-B40-805	8214		2.6	5.9	2 x 2.20	2 x 5.3
F	S20 V2TT MXV-B50-1803	8086	50	0.9	3.55	2 x 2.20	2 x 5.3

	Réservoir à diaphragme 10 bars CE	Aspiration DN 1		Refoulement DN 2		VARIOMAT2 400 Volts	Dimensions mm			Poids kg
		Vannes	Collecteurs	Vannes et clapets	Collecteurs		Lg	I	Ht	
A	PWB 18L10	1"1/4	2"	1"	1"1/2	9TT	600	652	1123	79
B	PEB 24LX10	1"1/2	2"1/2	1"1/4	2"	9TT	600	725	1238	87
C										93
D	2 x PEB 24LX10	2"	3"	1"1/2	2"1/2	9TT	600	784	1291	101
E	80	2"1/2	DN 100	1"1/2	3"	9TT	600	895	1101	113
F										111

Pompes MXV-B : page 19 - VARIOMAT2TT : page 305 - Réservoir : page 185.

S20 V2TT MXV 2 pompes MXV à vitesse variable - VARIOMAT2TT

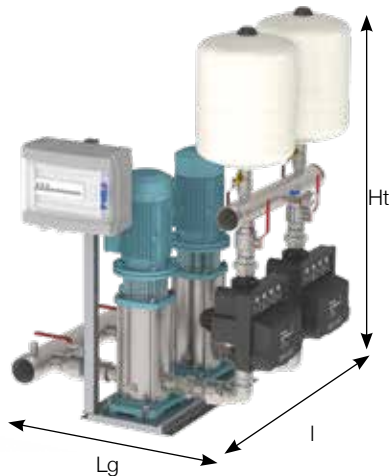

S20 V2TT MXV40-805

	Référence	€ HT	Débit maxi en m³/h	Pression en bars		400 Volts	
				Mini	Maxi	kW	A
A	S20 V2TT MXV25-204	6714	9	1.7	4.4	2 x 0.75	2 x 1.9
B	S20 V2TT MXV32-404	7067	16	1.45	4.5	2 x 1.10	2 x 2.7
C	S20 V2TT MXV32-406	7288		2.25	6.8	2 x 1.50	2 x 4.3
D	S20 V2TT MXV40-804	8681	26	2.1	4.7	2 x 1.50	2 x 4.3
E	S20 V2TT MXV40-805	8760		2.6	5.9	2 x 2.20	2 x 5.3
F	S20 V2TT MXV50-1504	9379	48	2.4	5.8	2 x 3.00	2 x 6.6

	Réservoir à diaphragme 10 bars CE	Aspiration DN 1		Refoulement DN 2		VARIOMAT2 400 Volts	Dimensions mm			Poids kg
		Vannes	Collecteurs	Vannes et clapets	Collecteurs		Lg	I	Ht	
A	PWB 18L10	1"1/4	2"	1"	1"1/2	9TT	600	652	1143	93
B	PEB 24LX10	1"1/2	2"1/2	1"1/4	2"	9TT	600	652	1143	100
C								725	1238	110
D	2 x PEB 24LX10	2"	3"	1"1/2	2"1/2	9TT	600	725	1238	120
E								784	1291	128
F	80	2"1/2	DN 100	1"1/2	3"	9TT	600	784	1291	184

Pompes MXV : page 20 - VARIOMAT2TT : page 305 - Réservoir : page 185.