


CM2 / CP2 / CP2-G DCM2 / DCP2 / DCP2-G

IN-LINE PUMPS



CM2 / CP2 / CP2-G / DCM2 / DCP2 / DCP2-G

IN-LINE PUMPS

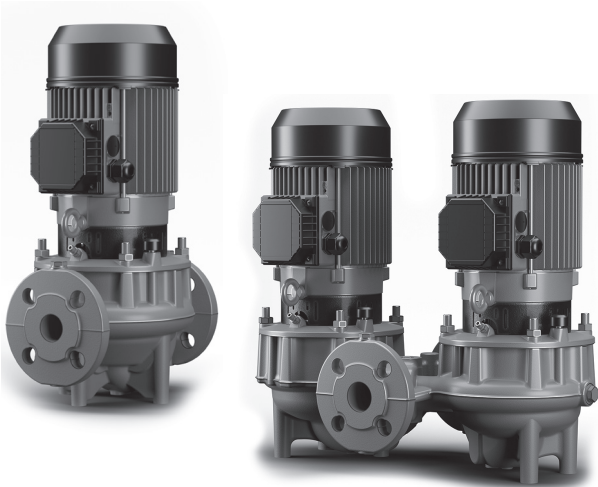

TECHNICAL DATA

Operating range: up to 36 m³/h with head up to 50 m.
Type of pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised
Glycol percentage (maximum): 50%
Liquid temperature range: from -15 °C to +140 °C
Maximum ambient temperature: +50 °C
Maximum operating pressure: 16 Bar (1600 kPa)
Flanging: PN10 - PN16
Motor efficiency: IE2 up to 0,55 kW; IE3 ≥ 0,75 kW
Protection: IP 55
Insulation: class F
Impeller material: cast iron or technopolymer
Three phase power input: 3x230 V 50 Hz / 3x400 V 50 Hz
Max rpm: 2910
Type of installation: Fixed in horizontal or vertical position with motor in up position. Only in vertical position for motor from 7,5 kW.

APPLICATIONS

In-line pumps for use in commercial building service, designed for the recirculation of water in air conditioning and heating systems even in the presence of solar collectors. Available in twin version (models with letter D).

CONSTRUCTION FEATURES OF THE PUMP


Suction and delivery ports in line and flanged PN 10 or PN 16 with threaded connectors for control pressure gauges. Pump body and motor support in cast iron. Impeller in cast iron or technopolymer depending on the model. Standard mechanical seal according to DIN 24960 in silicon carbide / silicon carbide with O-rings in EPDM.

CONSTRUCTION FEATURES OF THE MOTOR


Air-cooled three-phase asynchronous motor with two poles. Motor shaft in stainless steel. Electrical protection by the user.

MATERIALS

N.	PARTS	MATERIALS
1	PUMP BODY	CAST IRON EN G.JL250 UNI EN 1561
2	SUPPORT	CAST IRON EN G.JL250 UNI EN 1561
3	IMPELLER	CAST IRON EN G.JL200 UNI EN 1561 AND ULTRASON E 2010
4	SHAFT WITH ROTOR	AISI 316 + C10
5	MECHANICAL SEAL	SPRING AISI 316 - ESIC / ESIC - EPDM
6	O-RING	EPDM

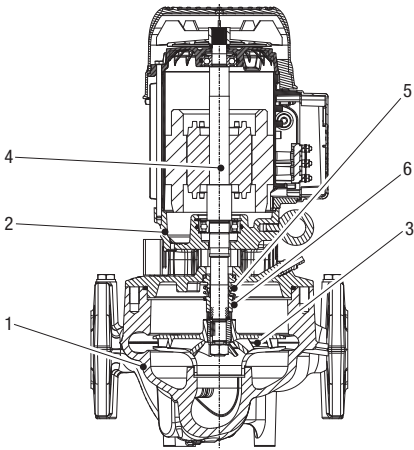

Denominations: (example)

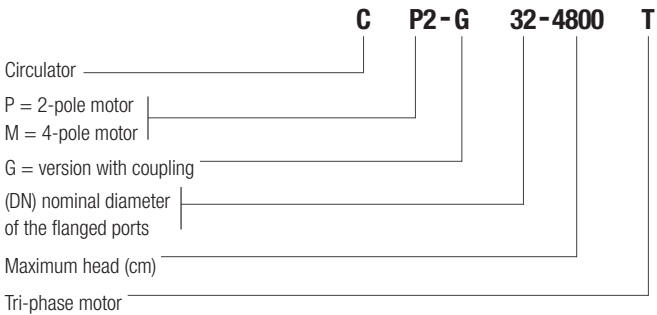

CM2 / CP2 / CP2-G / DCM2 / DCP2 / DCP2-G

IN-LINE PUMPS

SELECTION TABLE - CM2

MODEL	HYDRAULIC DATA																			
	Q=m³/h	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
	Q=l/min	0	33	67	100	133	167	200	233	267	300	333	367	400	433	467	500	533	567	600
CM2 32-450 T	H (m)	4,4	4,3	4,1	3,8	3,5	3,0	2,4	1,7	0,9										
CM2 32-600 T		6,0	5,9	5,7	5,4	4,9	4,3	3,6	2,8	1,9	1,0									
CM2 32-800 T		7,9	7,7	7,5	7,1	6,6	6	5,3	4,5	3,6	2,6	1,5	0,3							
CM2 32-1200 T		12	12	12	11	11	10	9,5	8,6	7,6	6,4	5,1	3,7	2,1	0,4					

SELECTION TABLE - CP2

MODEL	HYDRAULIC DATA																			
	Q=m³/h	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
	Q=l/min	0	33	67	100	133	167	200	233	267	300	333	367	400	433	467	500	533	567	600
CP2 32-550 T	H (m)	5,5	5,5	5,2	4,9	4,4	3,9	3,3	2,7	2,2	1,7	1,4								
CP2 32-750 T		7,4	7,2	6,9	6,6	6,2	5,6	5,1	4,4	3,7	2,8	1,9	1,0							
CP2 32-1100 T		10,6	10,4	10,1	9,7	9,3	8,7	8,1	7,4	6,5	5,6	4,5	3,3	2,0	0,5					
CP2 32-1400 T		14,3	14,0	13,7	13,3	12,8	12,3	11,7	10,9	10,1	9,2	8,2	7,1	5,8	4,4	2,9	1,3			
CP2 32-1800 T		17,8	17,7	17,4	17,0	16,6	16,1	15,5	14,7	13,9	13,0	12,0	10,9	9,7	8,3	6,9	5,3	3,6	1,8	
CP2 32-2200 T		21,9	21,8	21,6	21,2	20,8	20,2	19,5	18,7	17,7	16,7	15,5	14,1	12,7	11,1	9,3	7,4	5,4	3,2	0,8
CP2 32-2100 T		21,5	20,9	19,9	18,4	16,4	13,8	10,6	6,8	2,1										
CP2 32-2700 T		26,7	26,5	26,3	25,9	25,4	24,9	24,3	23,7	23,0	22,3	21,5	20,7	19,9	19,1					
CP2 32-3600 T		36,4	36,7	36,8	36,6	36,3	35,7	35,0	34,2	33,3	32,2	31,1	29,9	28,8	27,6	26,4	25,2	24,1	23,1	22,2
CP2 32-4000 T		40,3	40,6	40,7	40,6	40,2	39,7	39,0	38,2	37,3	36,2	35,1	33,9	32,6	31,2	29,9	28,5	27,2	25,8	24,5
CP2-G 32-4800 T		49,1	49,0	48,9	48,7	48,4	48,0	47,6	47,0	46,3	45,5	44,6	43,5	42,3	41,0	39,6	37,9	36,2	34,3	32,2

SELECTION TABLE - DCM2



MODEL	HYDRAULIC DATA																			
	Q=m³/h	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
	Q=l/min	0	33	67	100	133	167	200	233	267	300	333	367	400	433	467	500	533	567	600
DCM2 32-450 T	H (m)	4,8	4,7	4,4	4,0	3,5	2,8	2,0	1,0											
DCM2 32-600 T		6,0	6,0	5,7	5,3	4,7	4,0	3,1	2,0	0,8										
DCM2 32-800 T		8,0	7,9	7,8	7,5	7,1	6,6	5,9	5,2	4,4	3,5	2,5	1,5	0,4						
DCM2 32-1200 T		11,1	11,0	10,7	10,4	9,9	9,3	8,6	7,8	6,9	5,8	4,6	3,3	1,9	0,4					

SELECTION TABLE - DCP2

MODEL	HYDRAULIC DATA																			
	Q=m³/h	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
	Q=l/min	0	33	67	100	133	167	200	233	267	300	333	367	400	433	467	500	533	567	600
DCP2 32-550 T	H (m)	5,6	5,4	5,1	4,7	4,1	3,4	2,5	1,5	0,4										
DCP2 32-750 T		7,5	7,2	6,9	6,4	5,9	5,1	4,3	3,3	2,1	0,8									
DCP2 32-1100 T		10,7	10,5	10,2	9,7	9,1	8,4	7,5	6,5	5,4	4,1	2,7	1,1							
DCP2 32-1400 T		14,2	14,0	13,7	13,2	12,7	12,0	11,2	10,2	9,2	7,9	6,5	5,0	3,2	1,3					
DCP2 32-2100 T		22,2	21,4	20,2	18,4	16,0	12,9	9,0	4,2											
DCP2 32-1800 T		17,9	17,8	17,5	17,0	16,5	15,8	15,0	14,0	13,0	11,8	10,4	9,0	7,3	5,6	3,7	1,7			
DCP2 32-2200 T		22,3	22,2	21,9	21,5	20,9	20,2	19,3	18,2	17,0	15,7	14,2	12,7	10,9	9,1	7,1	5,1	2,9	0,6	
DCP2 32-2700 T		27,3	27,2	26,9	26,6	26,1	25,5	24,9	24,1	23,2	22,2	21,0	19,8	18,4	16,9	15,3	13,6	11,8	9,8	7,7
DCP2 32-3600 T		36,8	36,8	36,6	36,3	35,9	35,3	34,5	33,7	32,7	31,7	30,5	29,3	28,0	26,6	25,2	23,7	22,2	20,6	19,1
DCP2 32-4000 T		41,0	41,0	40,8	40,5	40,0	39,4	38,7	37,8	36,8	35,7	34,5	33,2	31,8	30,3	28,8	27,2	25,6	23,9	22,1
DCP2-G 32-4800 T		49,6	49,5	49,2	48,9	48,4	47,8	47,1	46,3	45,3	44,3	43,2	41,9	40,6	39,1	37,6	35,9	34,2	32,3	30,4

CM2 - IN-LINE PUMPS FOR CIRCULATION SYSTEMS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

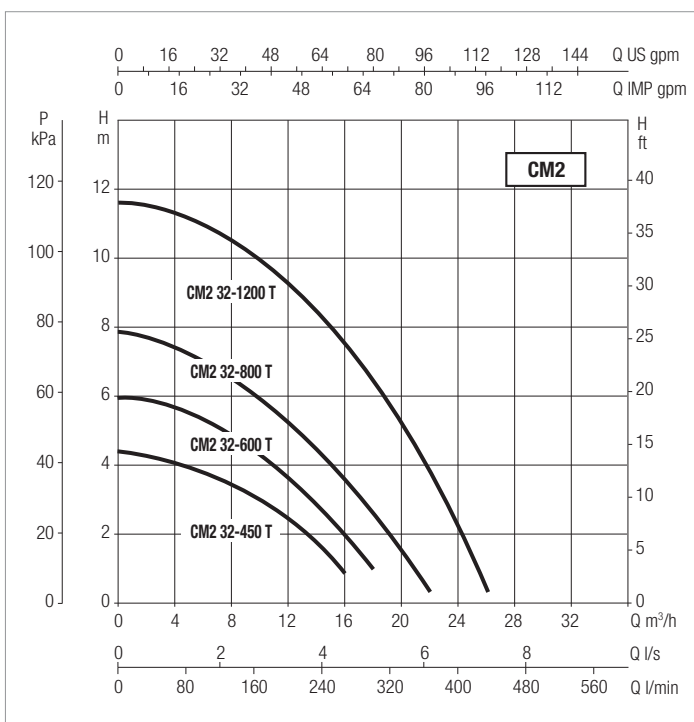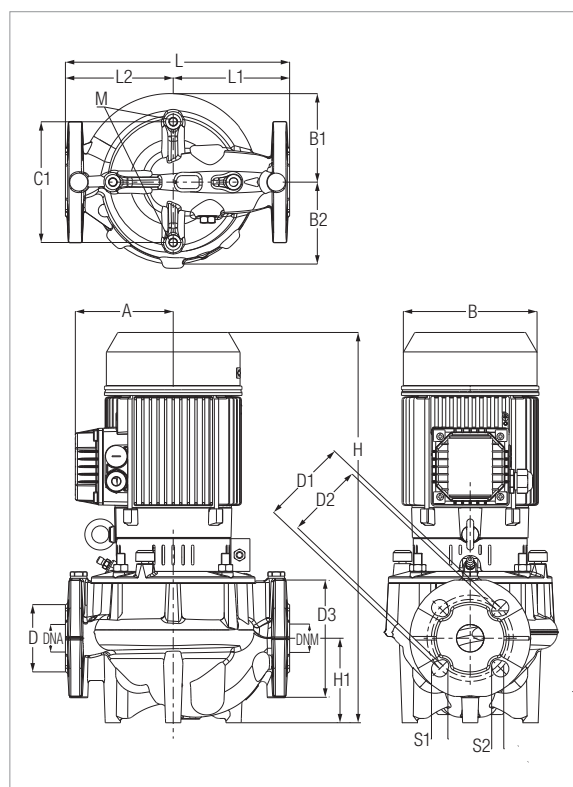



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [Ah]	
					kW	HP	230	400
CM2 32-450 T	260	DN 32 PN 16 DN 32 PN 10	230-400V	0,26	0,25	0,34	1,2 A	0,7 A
CM2 32-600 T			230-400V	0,33	0,25	0,34	1,3 A	0,8 A
CM2 32-800 T	320		230-400V	0,51	0,37	0,50	2,0 A	1,2 A
CM2 32-1200 T			230-400V	0,73	0,55	0,75	2,4 A	1,4 A

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CM2 32-450 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	21,9
CM2 32-600 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	21,6
CM2 32-800 T	110	150	129	120	180	80	100	14	90	19	140	32	33	459	90	320	165	155	10	0,52	0,29	0,7	0,11	27
CM2 32-1200 T	110	150	129	120	180	80	100	14	90	19	140	32	33	459	90	320	165	155	10	0,52	0,29	0,7	0,11	27

CP2 - IN-LINE PUMPS FOR CIRCULATION SYSTEMS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

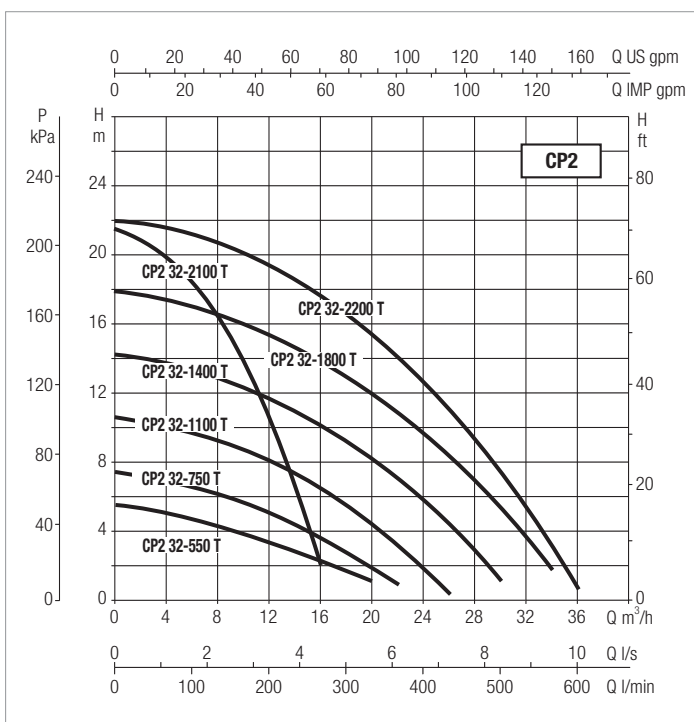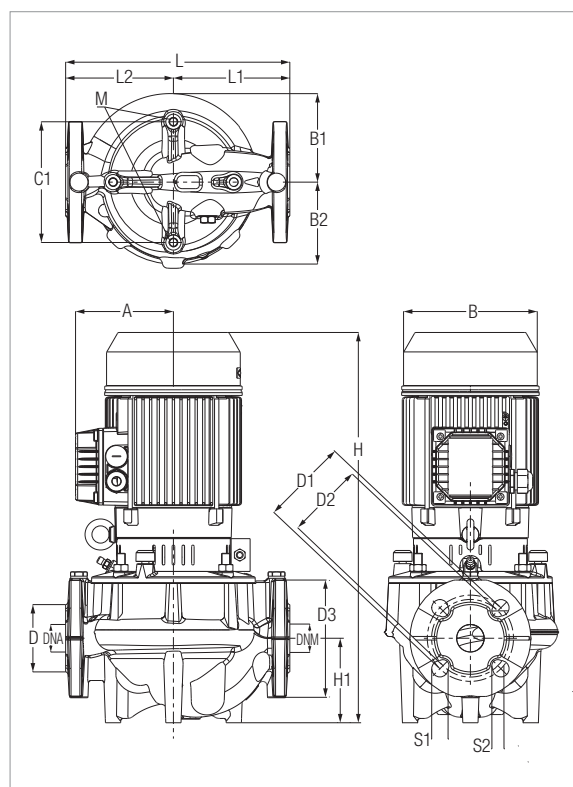



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [Ah]	
					kW	HP	230	400
CP2 32-550 T	260	DN 32 PN 16 DN 32 PN 10	230-400V	0,37	0,25	0,34	1,7 A	1 A
CP2 32-750 T			230-400V	0,48	0,37	0,50	1,9 A	1,1 A
CP2 32-1100 T			230-400V	0,73	0,55	0,75	2,4 A	1,4 A
CP2 32-1400 T			230-400V	1,07	0,75	1,02	3,5 A	2 A
CP2 32-1800 T			230-400V	1,48	1,1	1,50	5,6 A	3,2 A
CP2 32-2200 T			230-400V	1,83	1,5	2,04	6,3 A	3,6 A
CP2 32-2100 T			230-400V	0,85	0,75	1,02	3 A	1,7 A

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CP2 32-550 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	22,6
CP2 32-750 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	22,6
CP2 32-1100 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	22,6
CP2 32-1400 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	24,7
CP2 32-1800 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	25,5
CP2 32-2200 T	113	160	102	95	140	78	100	14	90	19	140	32	33	453	98	260	135	125	10	0,53	0,3	0,46	0,07	25
CP2 32-2100 T	113	160	102	95	140	78	100	14	90	19	140	32	33	453	98	260	135	125	10	0,53	0,3	0,46	0,07	25

CP2 - IN-LINE PUMPS FOR CIRCULATION SYSTEMS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

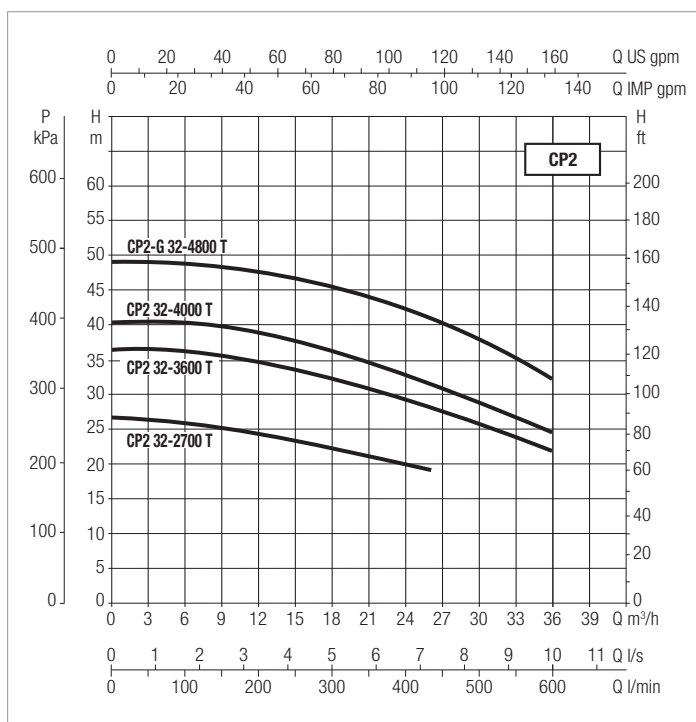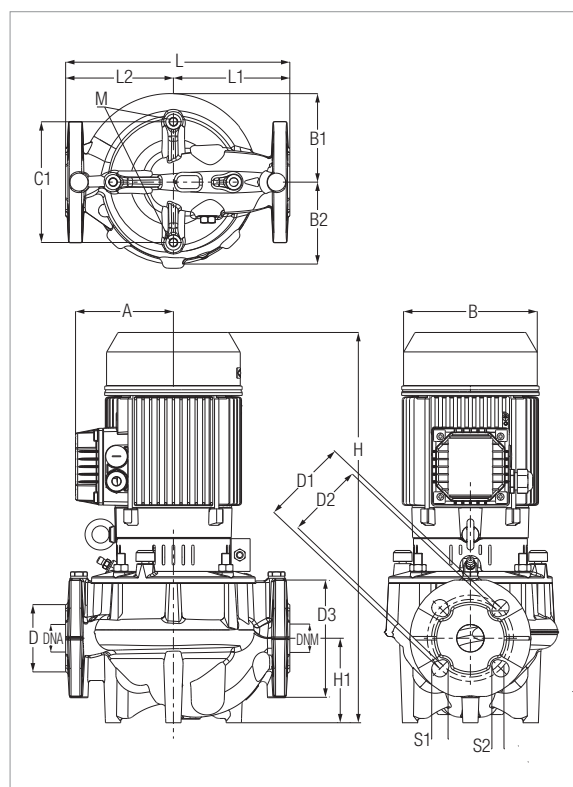



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [Ah]	
					kW	HP	230	400
CP2 32-2700 T	320	DN 32 PN 16 DN 32 PN 10	230-400V	2,9	2,2	2,99	9 A	5,2 A
CP2 32-3600 T			230-400V	4,08	3	4,08	12,3 A	7,1 A
CP2 32-4000 T			230-400V	4,95	4	5,44	15,1	8,7 A
CP2-G 32-4800 T			230-400V	6,5	5,5	7,48	18,2 A	10,5 A

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CP 2 32-2700 T	118	160	102	94	140	80	100	14	90	19	140	32	33	526	90	320	165	155	10	0,52	0,29	0,7	0,11	37
CP 2 32-3600 T	135	193	130	125	180	80	100	14	90	19	140	32	33	535	90	320	165	155	10	0,52	0,29	0,7	0,11	45
CP 2 32-4000 T	135	193	130	125	180	80	100	14	90	19	140	32	33	535	90	320	165	155	10	0,52	0,29	0,7	0,11	45
CP 2-G 32-4800 T	202	258	129	120	180	80	100	14	90	19	140	32	33	689	90	320	165	155	10	0,7	0,6	1,1	0,46	74

DCM2 - IN-LINE PUMPS FOR CIRCULATION SYSTEMS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

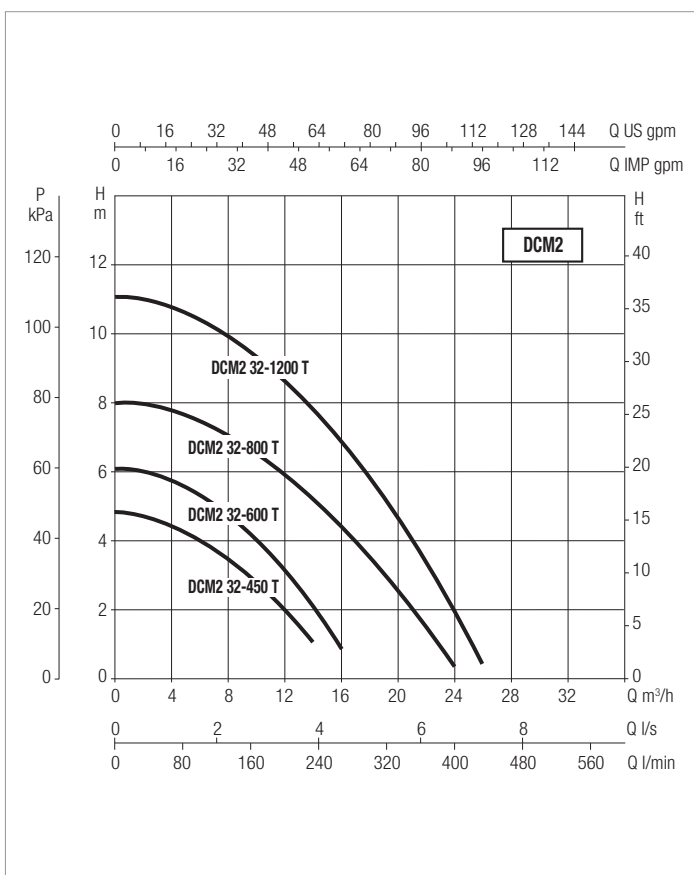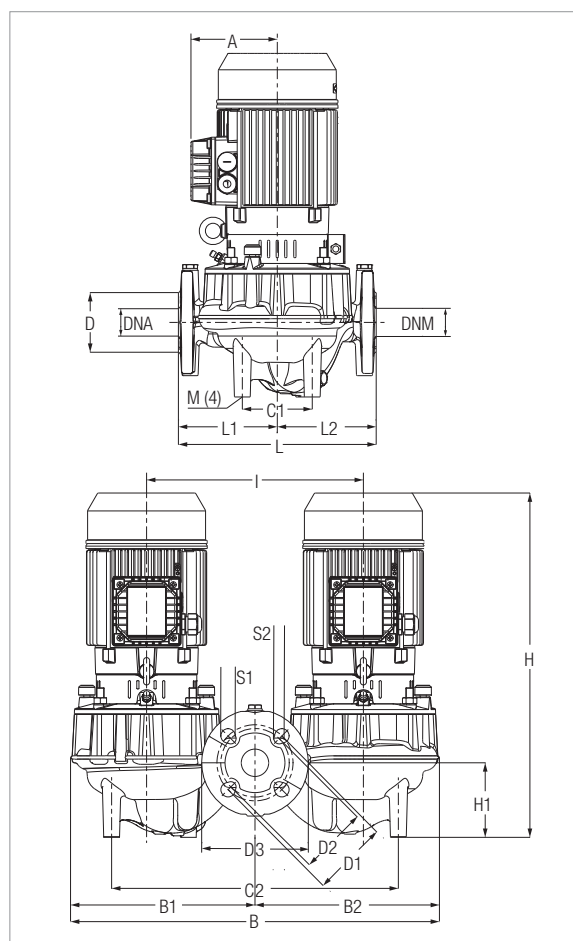



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [Ah]	
					kW	HP	230	400
DCM2 32-450 T	260	DN 32 PN 16 DN 32 PN 10	230-400V	0,26	0,25	0,34	1,2 A	0,7 A
DCM2 32-600 T			230-400V	0,33	0,25	0,34	1,3 A	0,8 A
DCM2 32-800 T	320		230-400V	0,51	0,37	0,50	2,0 A	1,2 A
DCM2 32-1200 T			230-400V	0,73	0,55	0,75	2,4 A	1,4 A

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																							L/A	L/B	H	
DCM2 32-450 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCM2 32-600 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCM2 32-800 T	110	609	305	305	113	463	78	100	14	90	19	140	33	33	459	90	350	320	150	170	10	684	426	834	0,245	54,5
DCM2 32-1200 T	110	609	305	305	113	463	78	100	14	90	19	140	33	33	459	90	350	320	150	170	10	684	426	834	0,245	54,5

DCP2 - IN-LINE PUMPS FOR CIRCULATION SYSTEMS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

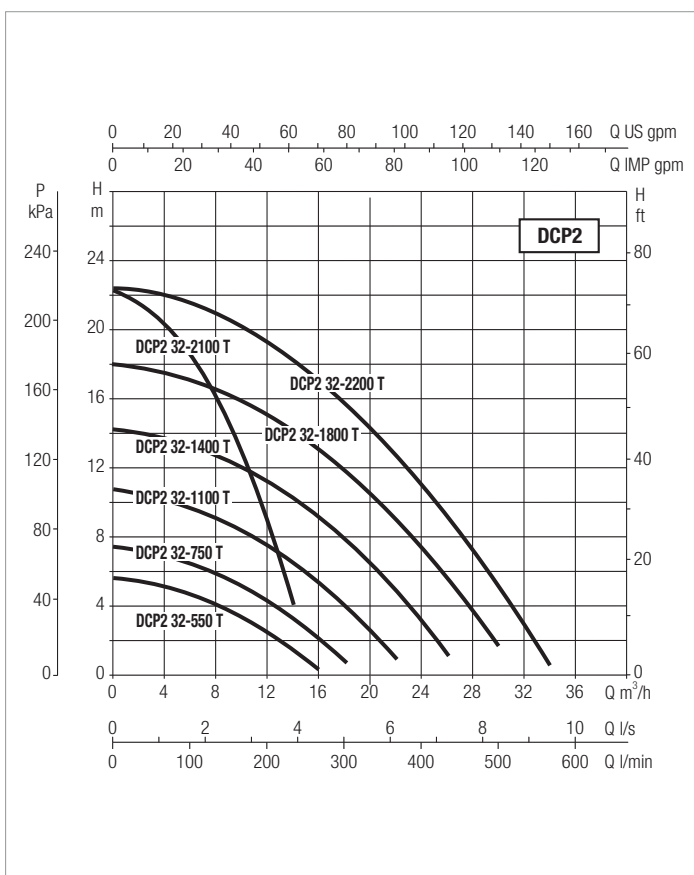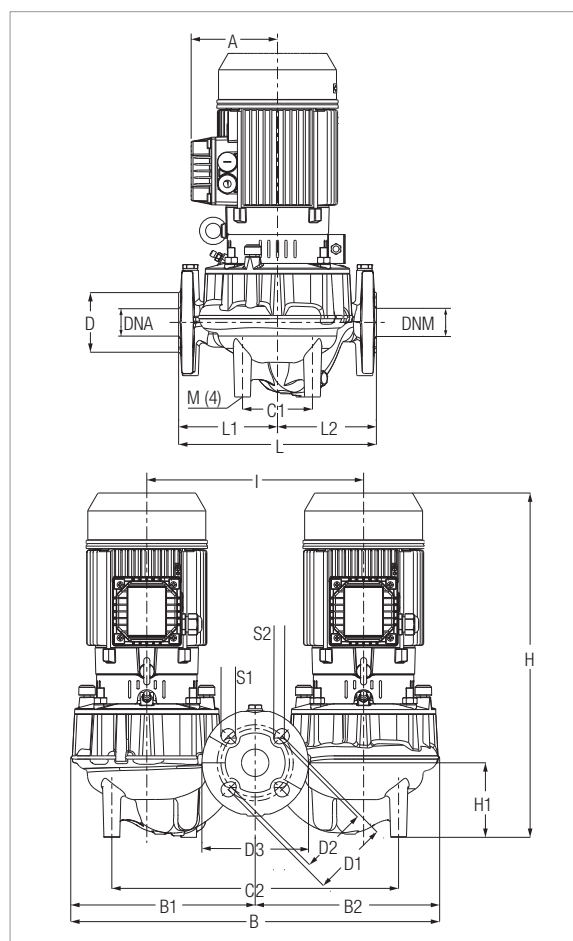



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA					
			POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [Ah]	
					kW	HP	230	400
DCP2 32-550 T	260	DN 32 PN 16 DN 32 PN 10	230-400V	0,37	0,25	0,34	1,7 A	1 A
DCP2 32-750 T			230-400V	0,48	0,37	0,50	1,9 A	1,1 A
DCP2 32-1100 T			230-400V	0,73	0,55	0,75	2,4 A	1,4 A
DCP2 32-1400 T			230-400V	1,07	0,75	1,02	3,5 A	2 A
DCP2 32-1800 T			230-400V	1,48	1,1	1,50	5,6 A	3,2 A
DCP2 32-2200 T			230-400V	1,83	1,5	2,04	6,3 A	3,6 A

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCP2 32-550 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-750 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-1100 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-1400 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-1800 T	114	238	242	480	92	377	80	100	14	90	19	140	36	37	453	98	285	260	130	130	10	540	420	610	0,138	49
DCP2 32-2200 T	114	238	242	480	92	377	80	100	14	90	19	140	36	37	453	98	285	260	130	130	10	540	420	610	0,138	49

DCP2 - IN-LINE PUMPS FOR CIRCULATION SYSTEMS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

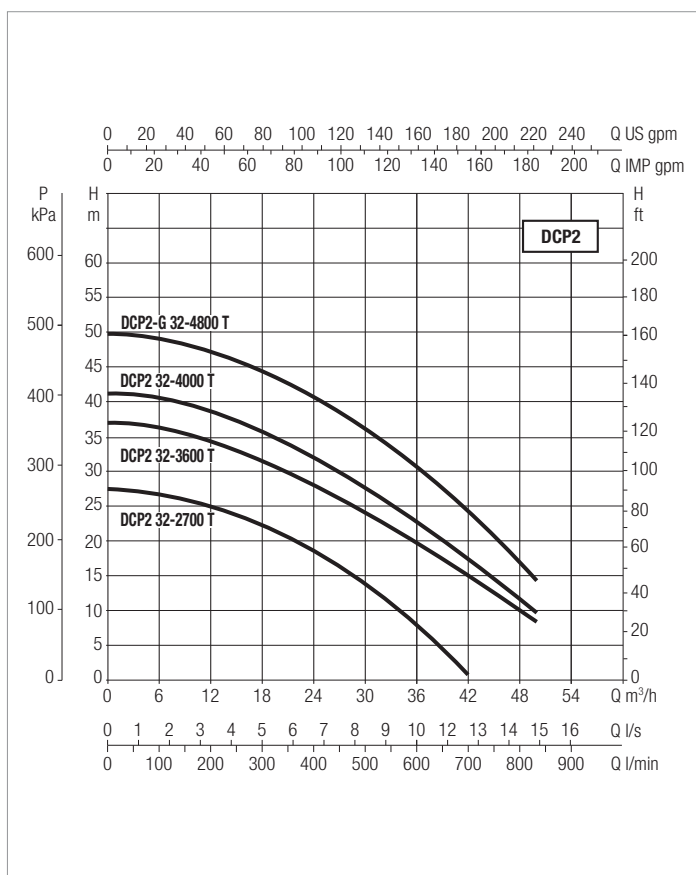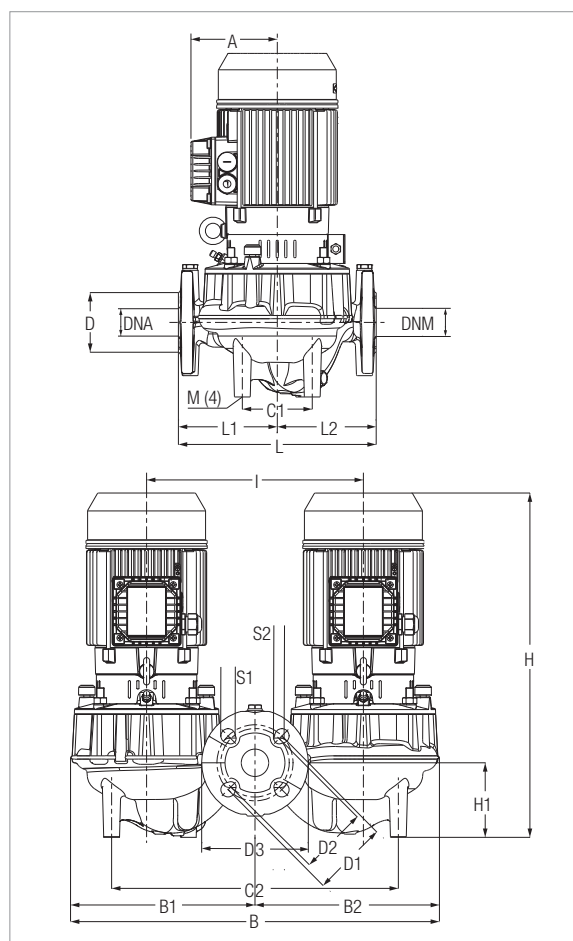

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [Ah]	
					kW	HP	230	400
DCP2 32-2700 T	320	DN 32 PN 16 DN 32 PN 10	230-400V	2,9	2,2	2,99	9 A	5,2 A
DCP2 32-3600 T			230-400V	4,08	3	4,08	12,3 A	7,1 A
DCP2 32-4000 T			230-400V	4,95	4	5,44	15,1	8,7 A
DCP2-G 32-4800 T			230-400V	6,5	5,5	7,48	18,2 A	10,5 A

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
	L/A			L/B			H																			
DCP2 32-2700 T	118	609	305	305	113	463	78	100	14	90	19	140	33	33	526	90	350	320	150	170	10	684	426	834	0,245	71,5
DCP2 32-3600 T	135	609	305	305	113	463	78	100	14	90	19	140	33	33	535	90	350	320	150	170	10	684	426	834	0,245	90
DCP2 32-4000 T	135	609	305	305	113	463	78	100	14	90	19	140	33	33	535	90	350	320	150	170	10	684	426	834	0,245	90
DCP2-G 32-4800 T	202	609	305	305	113	463	78	100	14	90	19	140	33	33	689	90	350	320	150	170	10	926	668	1237	0,765	168

DAB

P U M P S S E L E C T O R

On-line selection tool



DAB PUMPS LTD.
6 Gilberd Court
Newcomen Way
Severalls Business Park
Colchester
Essex
CO4 9WN - UK
salesuk@dwgroup.com
Tel. +44 0333 777 5010



DAB PUMPS IBERICA S.L.
Calle Verano 18-20-22
28850 - Torrejón de Ardoz - Madrid
Spain
Info.spain@dwgroup.com
Tel. +34 91 6569545
Fax: +34 91 6569676



DAB PUMPS (QINGDAO) CO. LTD.
No.40 Kaituo Road, Qingdao Economic
& Technological
Development Zone
Qingdao City, Shandong Province - China
PC: 266500
sales.cn@dwgroup.com
Tel. +86 400 186 8280
Fax +86 53286812210



DAB PUMPS BV
'tHofveld 6 C1
1702 Groot Bijgaarden - Belgium
info.belgium@dwgroup.com
Tel. +32 2 4668353



DAB PUMPS HUNGARY KFT.
H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS DE MÉXICO, S.A. DE C.V.
Av Amsterdam 101 Local 4
Col. Hipódromo Condesa,
Del. Cuauhtémoc CP 06170
Ciudad de México
Tel. +52 55 6719 0493



DAB PUMPS B.V.
Albert Einsteinweg, 4
5151 DL Drunen - Nederland
info.netherlands@dwgroup.com
Tel. +31 416 387280
Fax +31 416 387299



DAB PUMPS POLAND Sp. z o.o.
Ul. Janka Muzykanta 60
02188 Warszawa - Poland
polska@dabpumps.com.pl



DAB PUMPS OCEANIA PTY LTD
426 South Gippsland Highway,
Dandenong South VIC 3175 - Australia
info.oceania@dwgroup.com
Tel. +61 1300 378 677



DAB PUMPS INC.
3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwgroup.com
Tel. 1- 843-797-5002
Fax 1-843-797-3366



DAB PUMPS GMBH
Am Nordpark 3
D - 41069 Mönchengladbach - Germany
info.germany@dwgroup.com
Tel. +49 2161 47388-0
Fax +49 2161 47388-36



DAB PUMPS SOUTH AFRICA (PTY) LTD
Twenty One Industrial Estate,
16 Purlin Street, Unit B, Warehouse 4
Olifantsfontein -1667 - South Africa
info.sa@dwgroup.com
Tel. +27 12 361 3997



PT DAB PUMPS INDONESIA
Satrio Tower lantai 26
unit C-D, Jl. Prof. Dr. Satrio Kav. C4,
Kel. Kuningan Timur, Kec. Setiabudi, Kota Adm.
Jakarta Selatan, Prov. DKI Jakarta. - Indonesia
Tel. +62 2129222850