



4430

Submersible Mixer

Gear Driven Mixer

Nominal Thrusts: 660 to 3,400 N



Specifications

1. Cable

SubCab cable. Jacket is Chlorinated Polyethylene rubber, Insulation is Ethylene Propylene rubber.

2. Junction box

The junction box is completely sealed off from the surrounding mixed media by utilizing an O-ring around the perimeter of the junction box sealing interface.

3. Motor

Flygt motors are tested according to IEC 34-1. Dry shell type, NEMA design B, induction squirrel cage motor. Motor insulation is Class H with a maximum working temperature of 180°C (356°F). The stator is cooled by the mixed media surrounding the stator casing.

4. Gear box

The gear box is a two-stage cylindrical helical gear box equipped with high precision low loaded gears. The gears are designed, according to AGMA for 100,000 hours of operation.

5. Oil casing

An environmentally friendly white paraffin based, FDA approved non-toxic, oil lubricates and cools the seals between the liquid and the electric motor. Pressure build-up within the oil casing is reduced by means of a built-in air volume.

6. Bearings

The motor shaft is supported by an inner single-row deep-groove ball bearing and an outer double-row roller bearing. The intermediate shaft is supported by two double-row roller bearings. The propeller shaft is supported by an inner single-row deep-groove ball bearing and an outer double-row angular contact ball bearing. All bearings are designed for more than 100,000 hours of operation.

7. Shaft seals

The mixer has one mechanical seal and two lip seals.

8. Shafts

The motor is delivered with the rotor as an integral part. The shafts are completely sealed and will not come into contact with the mixed media.

9. Propeller

The propeller blade is made of fiberglass reinforced polyurethane. The propeller shaft is constructed of 316 stainless steel.


The propeller is nonclogging and designed with backward curved propeller blades. It is designed to deliver the greatest possible mixing effect in relation to motor output.

10. Monitoring system

The stator incorporates three thermal switches connected in series. The thermal switches open at 125°C (260°F).

Applications:

The 4430 is used for mixing and current creation in wastewater aeration tanks. Also used for blending, flocculation, fish farming and de-icing applications.

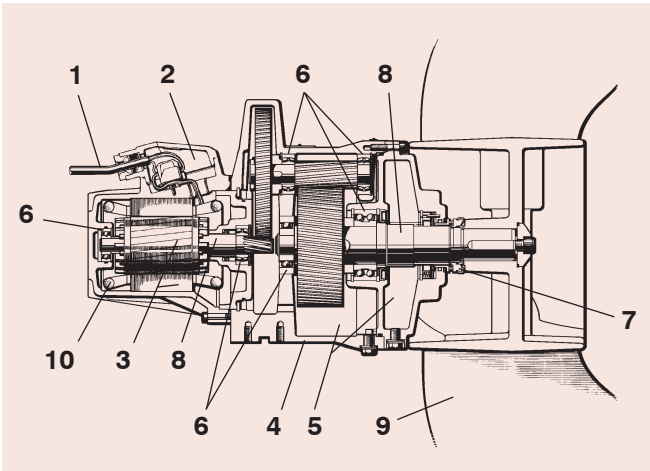

Materials of Construction:

Major castings in Cast Iron ASTM A48 Class 35B

Approvals:


CSA tested and approved to UL Standard for Safety #778.



Flygt products are affiliated with the following associations:



4430

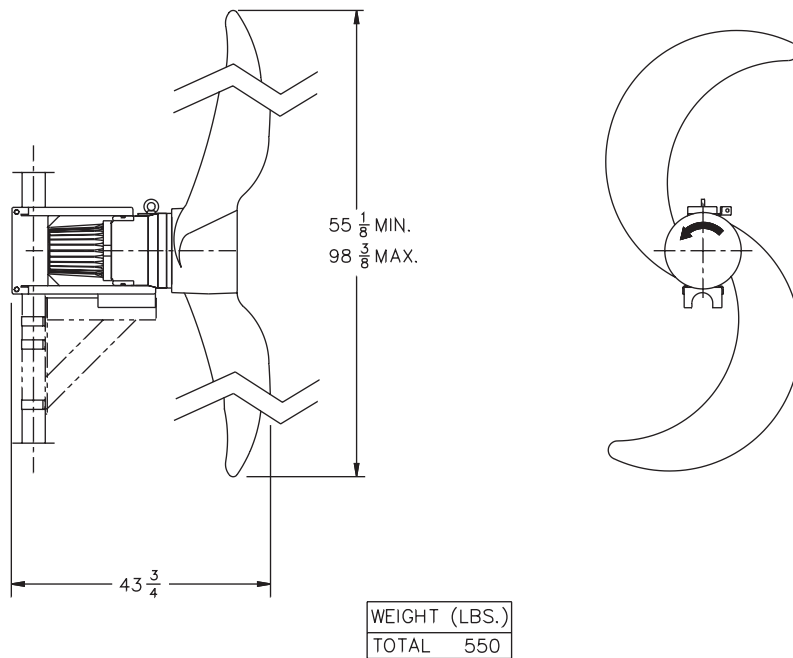

Propeller Performance Range - (contact Flygt for availability of additional propellers)

Prop. Code	Ø	Poles	Max. Motor HP Rating	Shaft *HP	Power Input (kW)	Motor Speed (RPM)	Prop. Speed (RPM)	Prop. Dia. (inches)	Nominal Thrust (N)
447	3	4	6.2	1.1	0.98	1730	30	55-1/8	660
Flygt has a full range of 4 pole propellers with flows between 17,300 and 67,500 GPM									
410	3	4	6.2	4.3	3.79	1730	38	98-3/8	3,400

*Horsepower consumed at the motor shaft between motor and gear in clear water.

Motor Data

Rated Output Power HP (kW)	Ø	Volts nom.	Full Load Amps	Locked Rotor Amps	Locked Rotor KVA	NEC Code Letter	Rated Input Power kW	Poles/RPM	Cable Size	Cable Part Number	Max. Cable Length (FT.)
6.2 (4.6)	3	200	19.0	83.0	28.7	E	5.5	4/1700	4G4+2x1.5 0.83"-(21.0mm)	94 20 60	95
		230	17.0	63.0	25.0	F					130
		460	8.3	39.0		F					525
		575	6.5	25.0		E					815

Efficiency				Power Factor			Electrical Service Specifications	
HP	100% Load	75% Load	50% Load	100% Load	75% Load	50% Load	Voltage Tolerances: $\pm 5\%$ (Rated Output), $\pm 10\%$ (without overheating) Frequency Tolerance: $\pm 5\%$ Voltage Balance (Phase to Phase): $\pm 1\%$ VFD Compatible.	
6.2	84.1	85.9	86.0	0.85	0.82	0.73		

Xylem Inc., Flygt products, reserves the right to modify performance, specifications or design without notice.

Xylem Inc., U.S.A.

Flygt/WEDECO products, 14125 South Bridge Circle, Charlotte, NC 28273. Tel. (704) 409-9700 Fax. (704) 295-9080
 Leopold, 227 S. Division Street Zellenople, PA 16063 Tel (724) 452-6300 Fax (724) 452-1377,
 Sanitaire, 9333 N. 49th Street Brown Deer, WI 53223-1472 Tel (414) 365-2200 Fax (414) 365-2210.

xylem
Let's Solve Water