
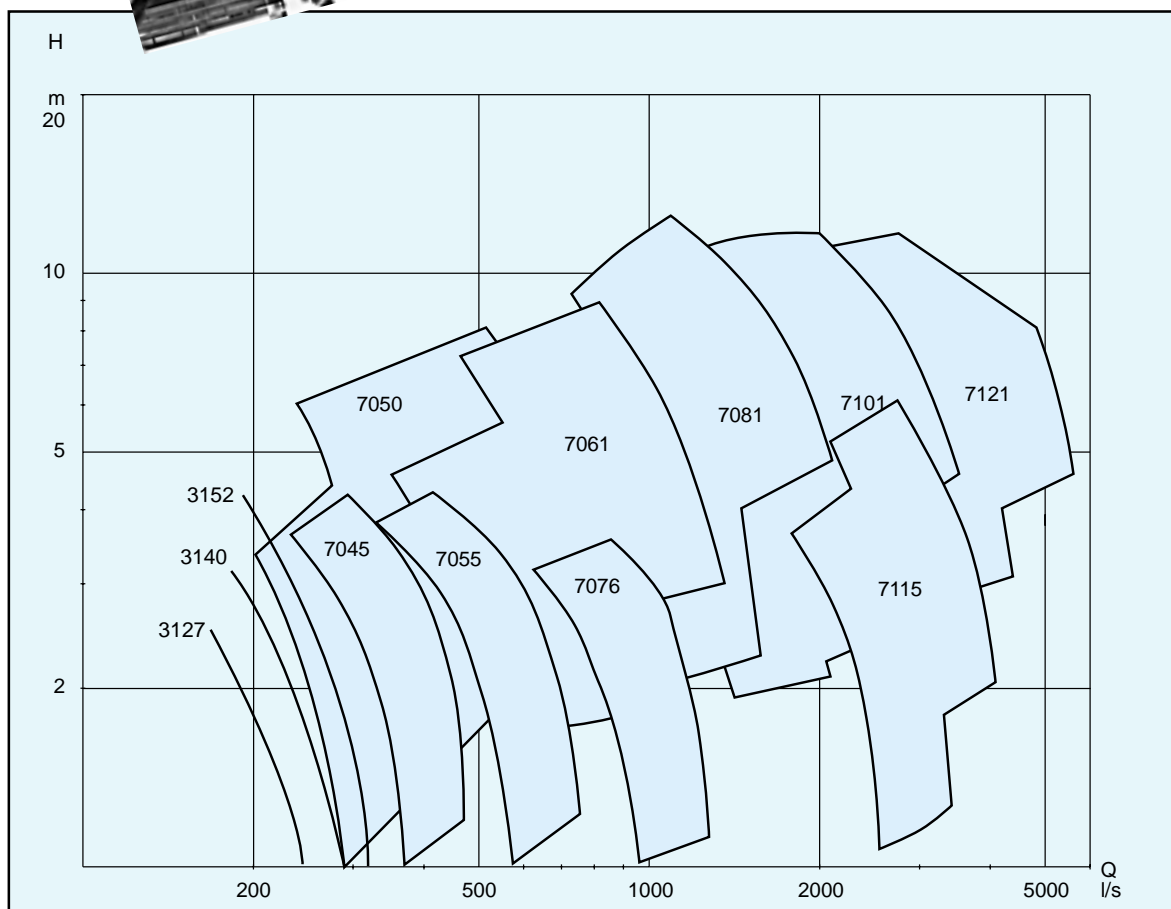



PROPELLER-PUMPS • 50 Hz

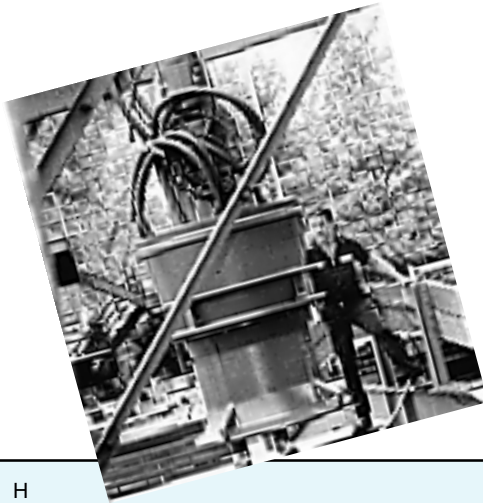


The propeller is dynamically balanced for minimum vibration and maximum life of seals and bearings.

Its new, hydrodynamic, conical design affords more efficient pumping.


Moreover, the propeller's swept-back blades (for low-clogging performance) are numerically machined to match the pump's specified duty point.



P 3127

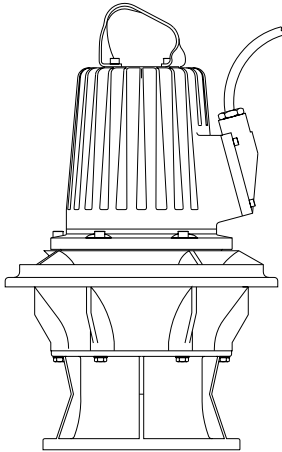


PL

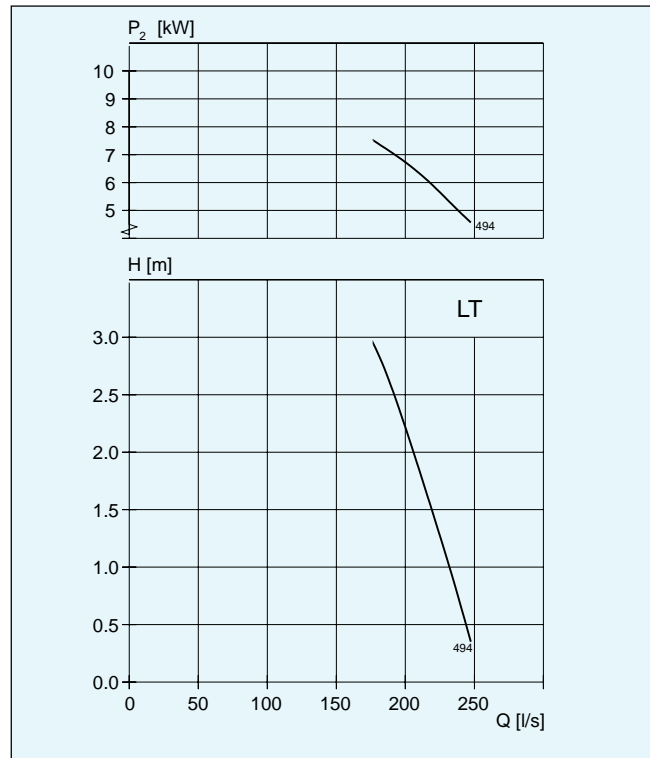


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Max weight kg
		P_1	P_2		
494	∅490	9.1	7.5	1435	182

P 3140

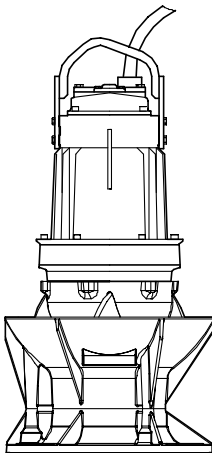


PL

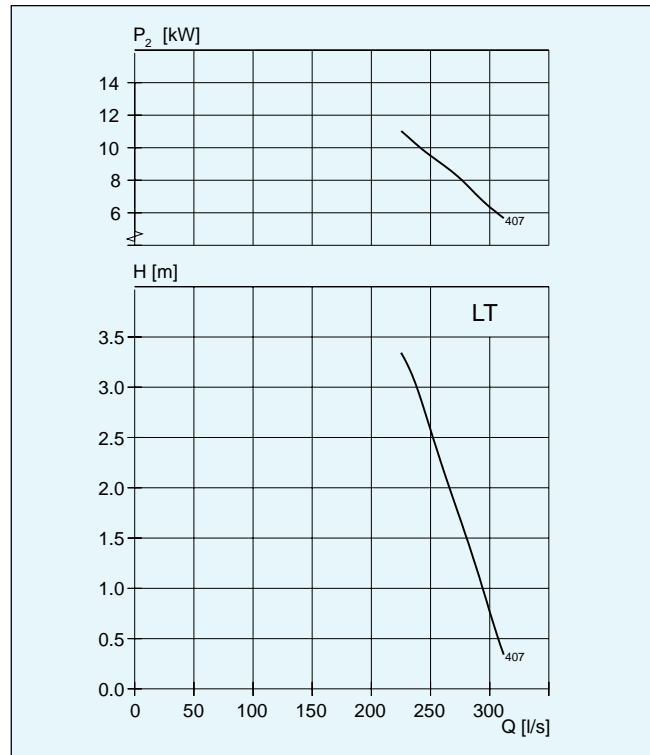


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Max weight kg
		P_1	P_2		
407	∅575	13.3	11	1440	270

P 3152

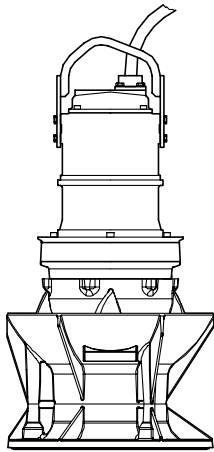


PL

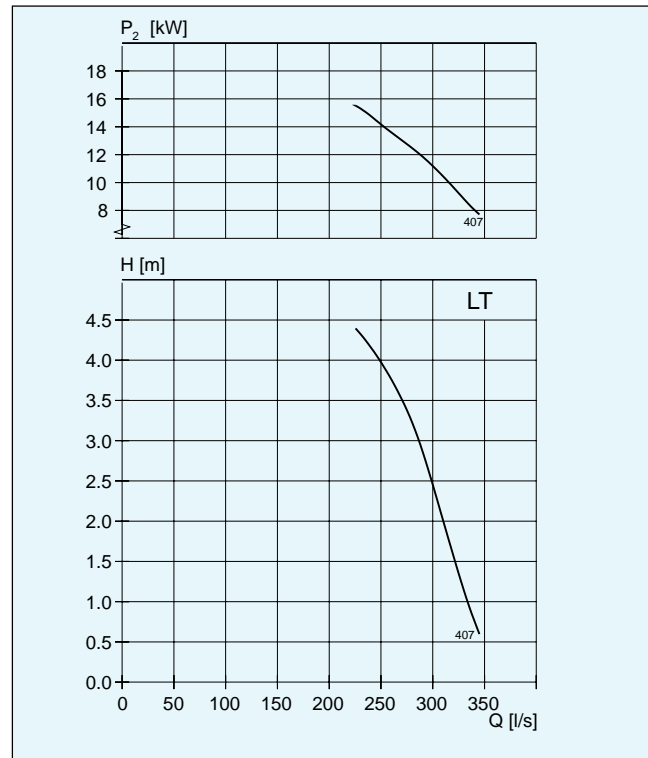


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Max weight kg
		P ₁	P ₂		
407	∅ 575	18,4	15,5	1440	273

P 7045

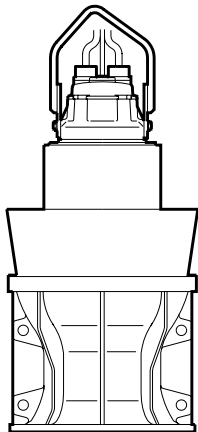


PL

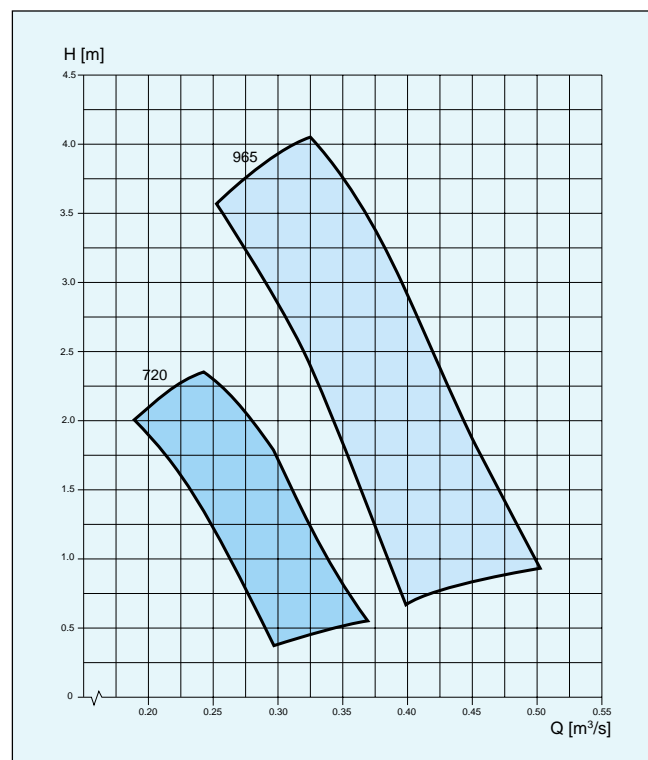


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
965	655	20-26	17-22	965	1425	420
720	655	13,3	11	720	1425	420

P 7050

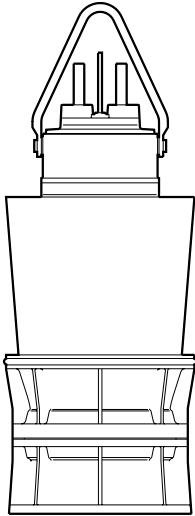


PL

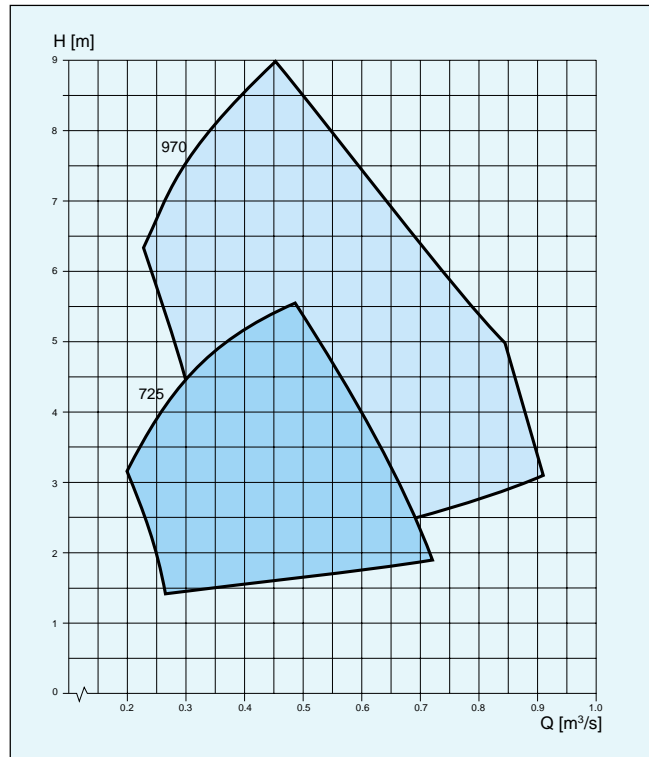


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
970	655	52-64	45-55	970	1735	750
725	655	31-42	27-37	725	1735	750

P 7055

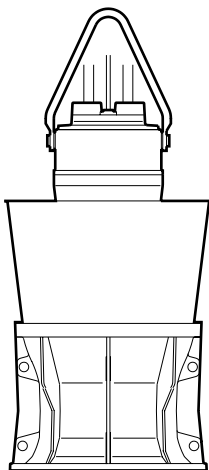


PL

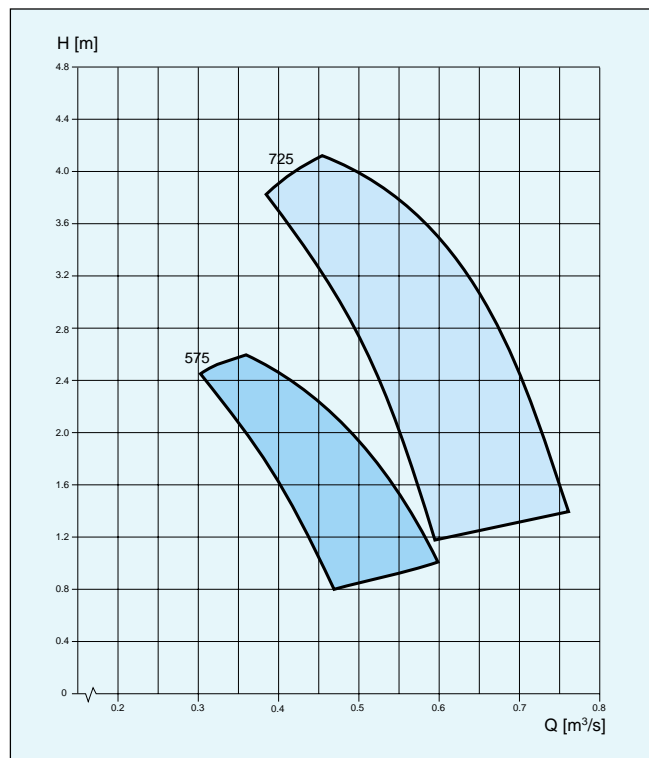


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
725	755	20-42	17-37	725	1700	630
575	755	16-20	13-17	575	1700	630

P 7061

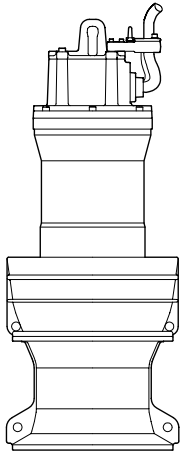


PL

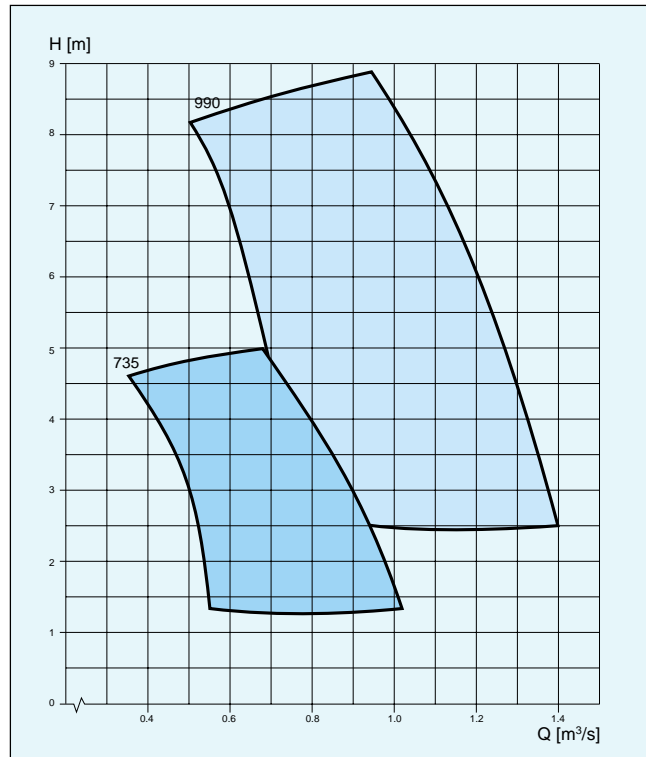

Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
990	770	64-173	58-160	990	2370	1350
735	770	51-61	46-55	735	2370	1350

P 7076

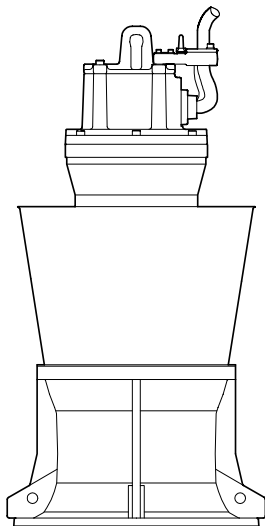


PL




Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
580	920	43-61	37-55	580	2315	1250

P 7081

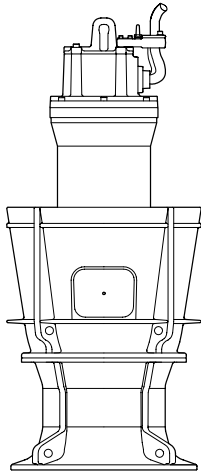


PL

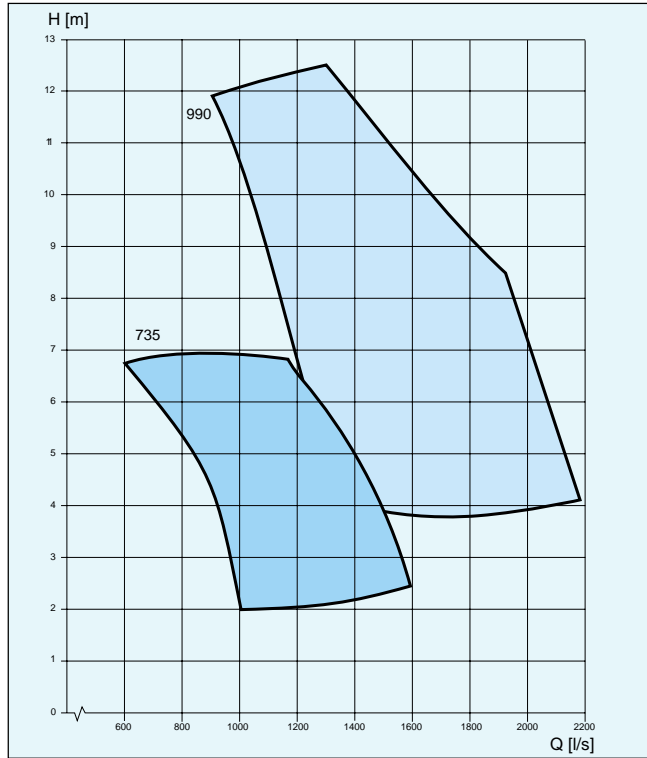


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
990	965	173-214	160-200	990	2675	1950
735	965	61-155	55-140	735	2675	1950

P 7101

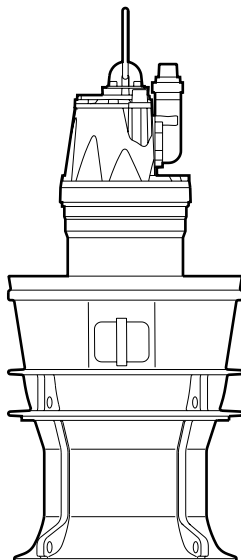


PL

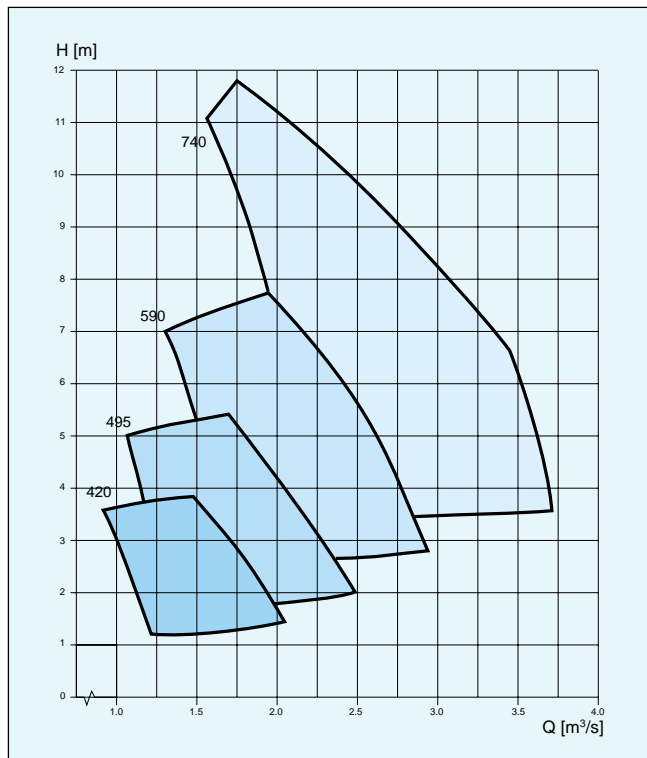


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
740	1170	246-320	230-300	740	3050	3300
590	1170	111-247	100-230	590	3050	3300
495	1170	67-174	60-160	495	3050	3300
420	1170	46-99	40-90	420	3050	3300

P 7115

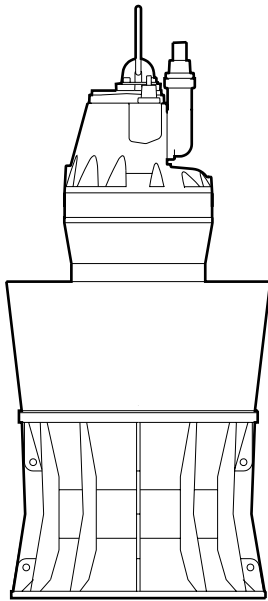


PL

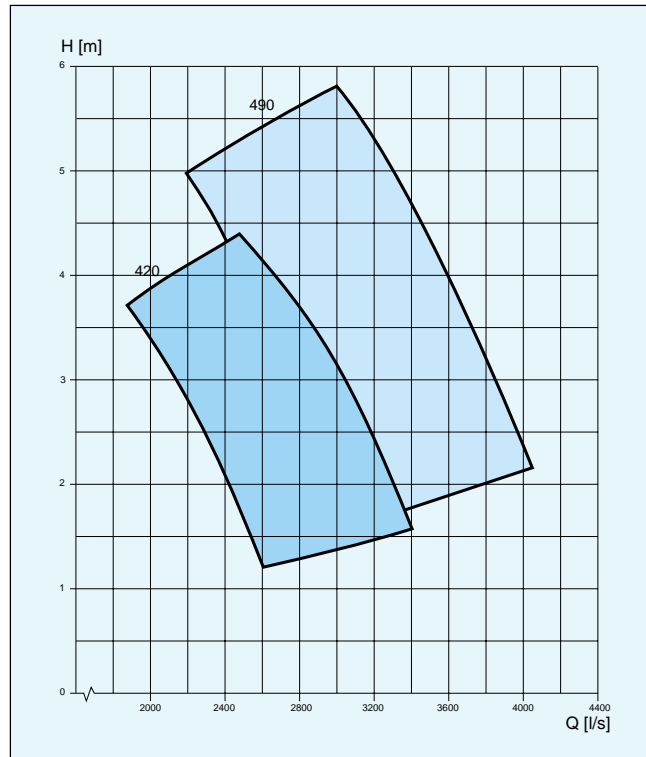


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
490	1360	174-241	160-225	490	3530	4500
420	1360	99-167	90-150	490	3530	4500

P 7121

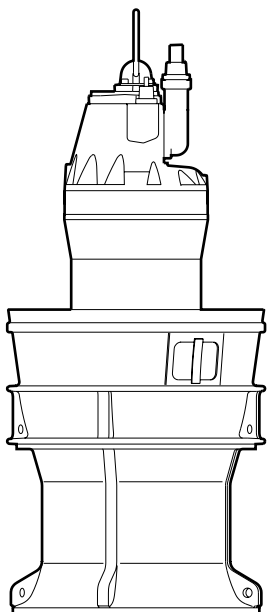

PL

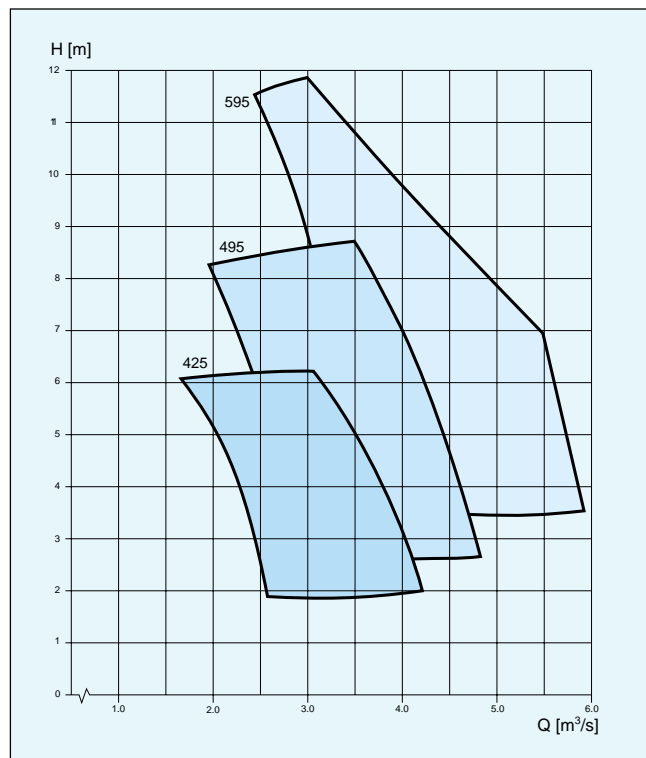

Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Overall height mm	Max weight kg
		P ₁	P ₂			
595	1370	385-484	365-460	595	3410	5200
495	1370	217-435	200-410	495	3410	5200
425	1370	140-267	125-250	425	3410	5200