



BIBO 2052

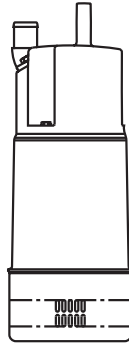

| Technical data | MT | MT | MT |
|-------------------|---------|---------------|---------------|
| IMPELLERCODE | 231 | 232 | 234 |
| PHASE | 3- | 1-, 3- | 1-, 3- |
| SPEED OF ROTATION | 2700rpm | 2700rpm | 2700rpm |
| OUTPUT POWER | 1.0kW | 0.75kW, 1.0kW | 0.75kW, 1.0kW |
| INPUT POWER | 1.4kW | 1kW, 1.4kW | 1kW, 1.4kW |
| WEIGHT | 18kg | 18kg | 18kg |

Poly-Life® version available

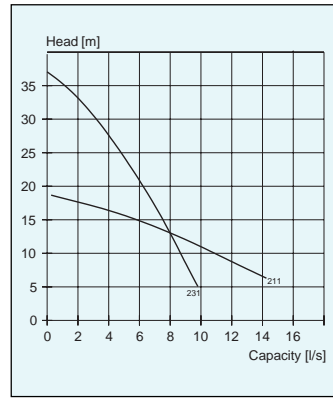


BIBO 2071




| Technical data | MT | LT |
|-------------------|---------|---------|
| IMPELLERCODE | 231 | 211 |
| PHASE | 3- | 3- |
| SPEED OF ROTATION | 2800rpm | 2800rpm |
| OUTPUT POWER | 3kW | 3kW |
| INPUT POWER | 3.9kW | 3.9kW |
| WEIGHT | 31kg | 28kg |


Poly-Life® version available

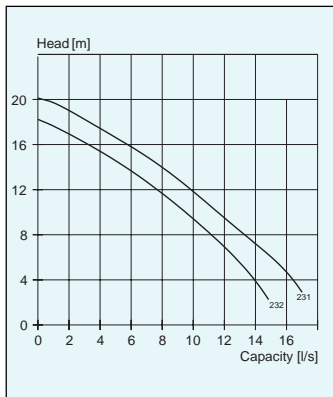


BIBO 2060

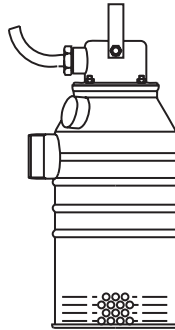

| Technical data | MT | HT |
|-------------------|---------|---------|
| IMPELLERCODE | 231 | 232 |
| PHASE | 3 | 3 |
| SPEED OF ROTATION | 2800rpm | 2800rpm |
| OUTPUT POWER | 2.2kW | 2.2kW |
| INPUT POWER | 2.8kW | 2.8kW |
| WEIGHT | 32kg | 32kg |

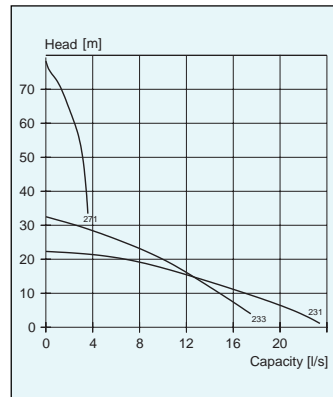

BIBO 2075

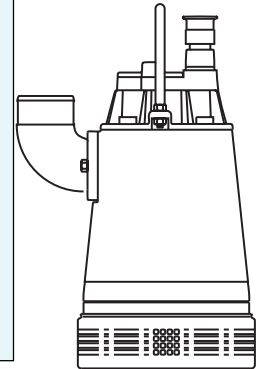


| Technical data | MT | HT | ST |
|-------------------|--|--|--|
| IMPELLERCODE | 231 | 233 | 271 |
| PHASE | 3- | 3- | 3- |
| SPEED OF ROTATION | 2800rpm | 2800rpm | 2800rpm |
| OUTPUT POWER | 3.7kW | 3.7kW | 5.5kW |
| INPUT POWER | 4.6kW | 4.6kW | 7.3kW |
| WEIGHT | 73kg ¹⁾ 40kg ²⁾ | 73kg ¹⁾ 40kg ²⁾ | 90kg ¹⁾ 64kg ²⁾ |


¹⁾ Model 324 in cast iron

²⁾ Model 334 in hydraulic aluminum

Poly-Life® version available

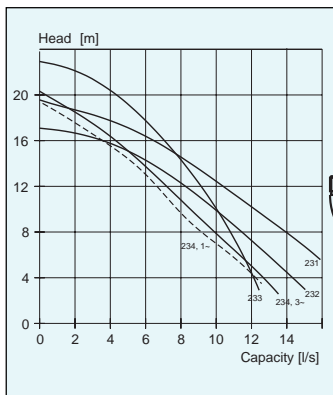


BIBO 2066

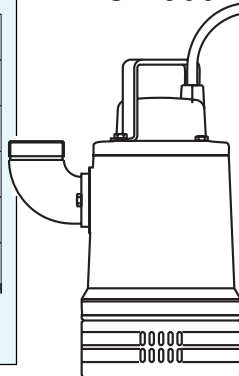


| Technical data | MT | HT | HT |
|-------------------|----------|----------|---------|
| IMPELLERCODE | 231, 232 | 233, 234 | 234- |
| PHASE | 3- | 3- | 1- |
| SPEED OF ROTATION | 2800rpm | 2800rpm | 2900rpm |
| OUTPUT POWER | 2.2kW | 2.2kW | 1.5kW |
| INPUT POWER | 2.8kW | 2.8kW | 1.9kW |
| WEIGHT | 30kg | 30kg | 30kg |

Poly-Life® version available

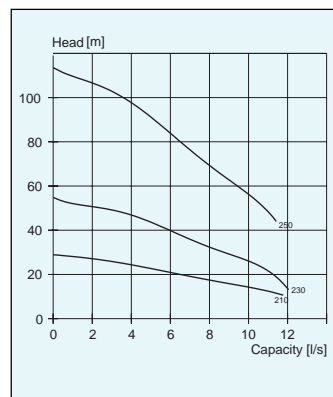

BIBO 2084



| Technical data | MT | HT | LT |
|-------------------|----------|----------|----------|
| IMPELLER CODE | 230 | 250 | 210 |
| PHASE | 3- | 3- | 3- |
| SPEED OF ROTATION | 2880 rpm | 2870 rpm | 2850 rpm |
| OUTPUT POWER | 7.5 kW | 14 kW | 3.7 kW |
| INPUT POWER | 8.9 kW | 16.4 kW | 4.5 kW |
| WEIGHT | 75 kg | 110 kg | 55 kg |