



BIBO 2250

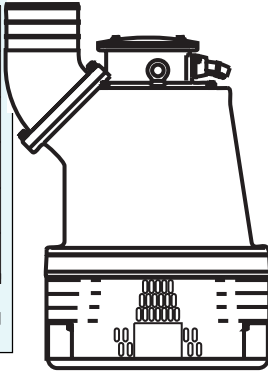


Technical data	MT	HT
IMPELLERCODE	431/432	433/434
PHASE	3-	3-
SPEED OF ROTATION	1475 rpm	1475 rpm
OUTPUT POWER	54 kW	54 kW
INPUT POWER	59 kW	59 kW
WEIGHT	540 kg	540 kg

Poly-Life® version available

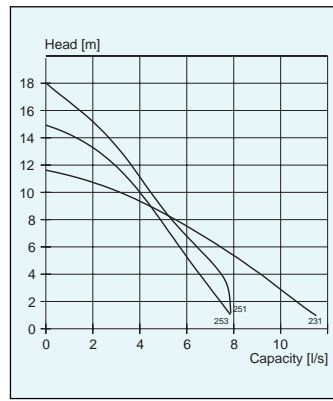


BIBO 3067




Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW	rpm	Available versions
253	3	38	10	0.9*	2815	BP/BS
251	3	38	10	1.2	2815	BP/BS
231	6	38	10	1.2	2815	BP/BS

Weight, kg	BP	BS
HT / MT	34	34

* Single phase

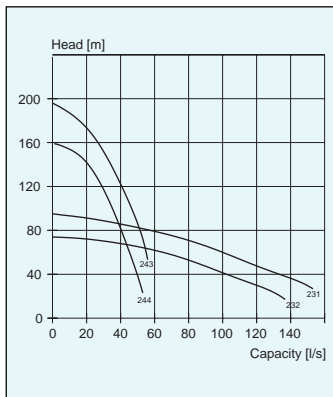


BIBO 2400

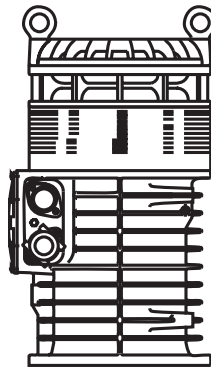


Technical data	MT	HT
IMPELLERCODE	231/232	243/244
PHASE	3-	3-
SPEED OF ROTATION	2970 rpm	2970 rpm
OUTPUT POWER	90 kW	90 kW
INPUT POWER	97 kW	97 kW
WEIGHT	900 kg	985 kg

Poly-Life® version available

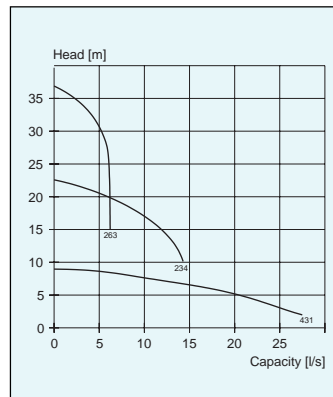


BIBO 3080

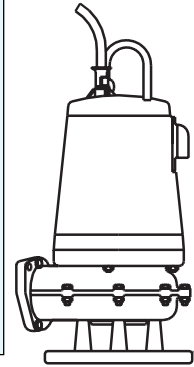


Technical data	MT	HT	ST
IMPELLERCODE	431	234	263
PHASE	3-	3-	3-
SPEED OF ROTATION	1400 rpm	2800 rpm	2800 rpm
OUTPUT POWER	4.0 kW	5.5 kW	5.5 kW
INPUT POWER	5.0 kW	7.3 kW	7.3 kW
WEIGHT	61 kg ¹⁾ 100 kg ²⁾	61 kg ¹⁾ 100 kg ²⁾	105 kg ³⁾

¹⁾Aluminium ²⁾Castiron ³⁾Alum-bronze

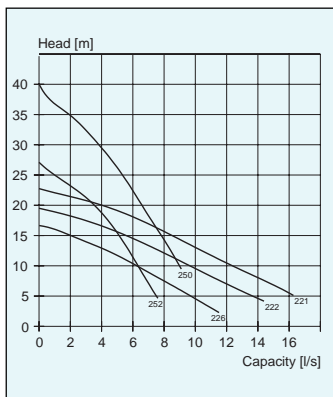

BIBO 3060

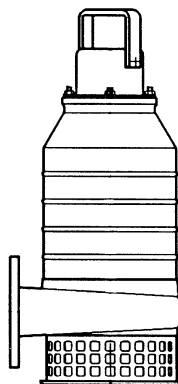

Technical data	MT	HT
IMPELLERCODE	221, 222, 226	250, 252
PHASE	3-	3-
SPEED OF ROTATION	2800 rpm	2800 rpm
OUTPUT POWER	2.4 kW	2.4 kW
INPUT POWER	3.3 kW	2.3 kW
WEIGHT	41 kg	41 kg

Poly-Life® version available