



Flygt Submersible Pumps

AVAILABLE FOR RENTAL AND SALE




www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10


Stainless Steel 2700 Series Dewatering Pumps

The all stainless steel Flygt 2700 series handles corrosive and abrasive liquids with wide variances in pH levels. These pumps are built to tackle the toughest dewatering challenges. These drainage pumps can handle lightly contaminated liquids. Ideal for pH values between 2 and 10, these pumps are tough enough to handle both highly acidic and highly alkaline media.


BS 2720 (SS)

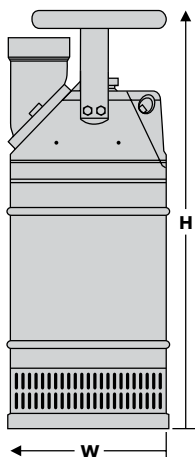


Model number: 2720.390
 Motor rating: 3.1HP@3315RPM
 Voltage (3Ø): 230V 460V 575V
 Full load amps: 8.5 4.2 3.4
 Versions: 3" Standard
 Imp. Code 242
 Discharge conn.: Male NPT
 Pump dimensions: 9³/₈" W x 23³/₄" H
 Max. weight (lbs.): 97
 Description: Stainless steel construction; open impeller; rests on bottom strainer.

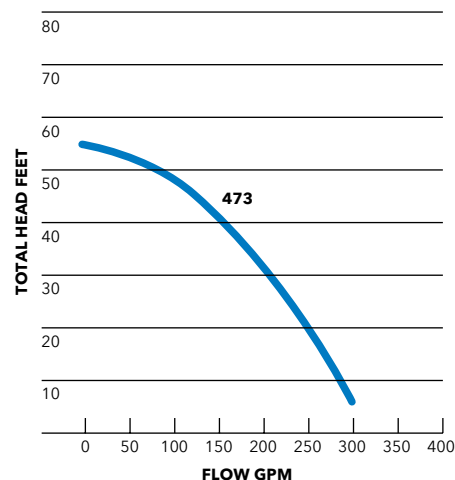


BS 2740 (SS)

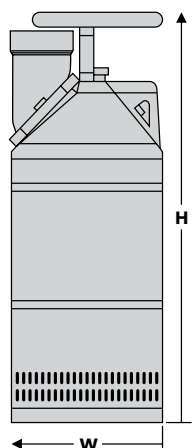


Model number: 2740.390
 Motor rating: 9 HP@3455 RPM
 Voltage (3Ø): 230V 460V 575V
 Full load amps: 21A 11A 8.6A
 Versions: 3" High head
 Imp. Code 267
 4" Standard
 Imp. Code 242
 Hose connection: Male NPT
 Pump dimensions: 11" W (max.) x 28³/₄" H (max.)
 Max. weight (lbs.): 165
 Description: Stainless steel construction; open impellers; rests on bottom strainer.

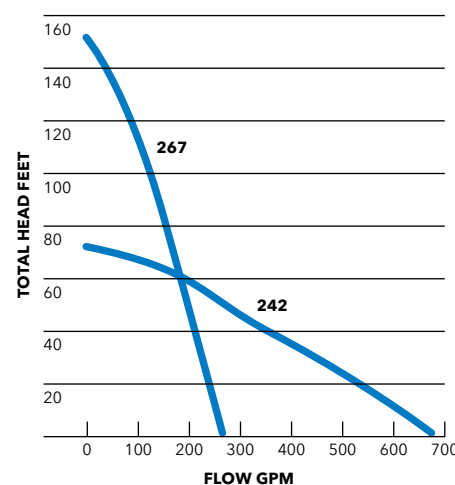

BS 2750 (SS)

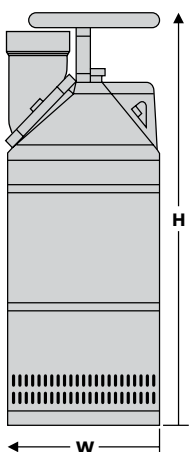


Model number: 2750.390
 Motor rating: 13 HP@3455 RPM
 Voltage (3Ø): 230V 460V 575V
 Full load amps: 31A 15A 12A
 Versions: 3" High head
 Imp. Code 267
 4" Standard
 Imp. Code 242
 Hose connection: Male NPT
 Pump dimensions: 11" W (max.) x 31" H (max.)
 Max. weight (lbs.): 198
 Description: Stainless steel construction; open impellers; rests on bottom strainer.

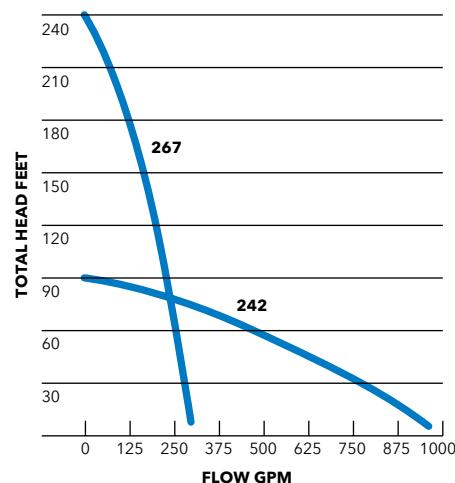


Stainless Steel 2700 Series Sludge Pumps

VORTEX IMPELLERS


DS 2720 (SS)

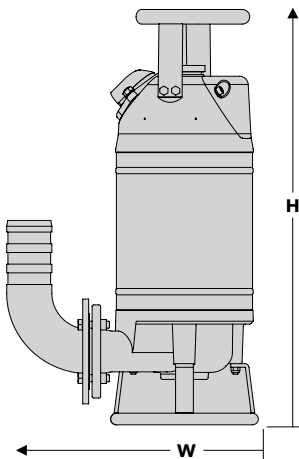


Model number: 2720.280
 Motor rating: 3.1HP@3315RPM
 Voltage (3ø): 230V 460V 575V
 Full load amps: 8.5 4.2 3.4
 Versions: 3" Standard
 Imp. Code 242
 Hose connection: Standard
 Pump dimensions: 16 1/2' W x 28 H
 Max. weight (lbs.): 111
 Description: Stainless steel construction; open
 impeller; rests on bottom strainer.

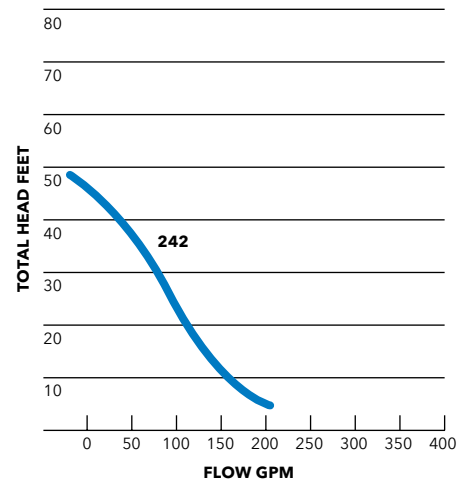


DS 2730 (SS)

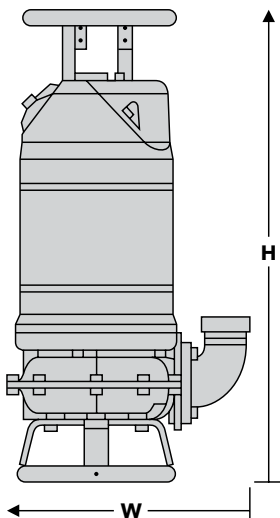

Model number: 2730.280
 Motor rating: 6.8HP@1675RPM
 Voltage (3ø): 230V 460V 575V
 Full load amps: 18A 9A 7.3A
 Versions: 4" Standard
 Imp. Code 442
 Hose connection: Male NPT
 Pump dimensions: 16 1/2" W (max.) x 28 3/8" H (max.)
 Max. weight (lbs.): 209
 Description: Stainless steel construction; vortex
 impeller; rests on bottom stand.

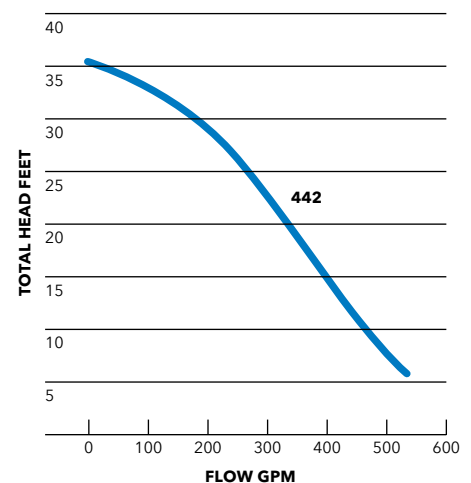

DS 2740 (SS)

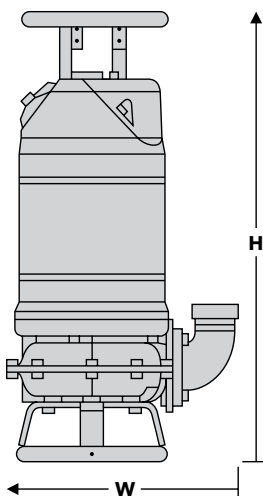

Model number: 2740.280
 Motor rating: 9 HP@3455RPM
 Voltage (3ø): 230V 460V 575V
 Full load amps: 21A 11A 8.6A
 Versions: 3" High head
 Imp. Code 244
 Hose connection: Male NPT
 Pump dimensions: 16 1/2" W (max.) x 28 3/8" H (max.)
 Max. weight (lbs.): 209
 Description: Stainless steel construction; vortex
 impeller; rests on bottom stand.

