



# Flygt Submersible Pumps

AVAILABLE FOR RENTAL AND SALE




[www.motralec.com](http://www.motralec.com) / [service-commercial@motralec.com](mailto:service-commercial@motralec.com) / 01.39.97.65.10


# Stainless Steel 2700 Series Dewatering Pumps

The all stainless steel Flygt 2700 series handles corrosive and abrasive liquids with wide variances in pH levels. These pumps are built to tackle the toughest dewatering challenges. These drainage pumps can handle lightly contaminated liquids. Ideal for pH values between 2 and 10, these pumps are tough enough to handle both highly acidic and highly alkaline media.


## BS 2720 (SS)

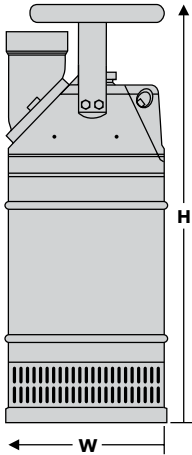


Model number: 2720.390  
 Motor rating: 3.1HP@3315RPM  
 Voltage (3Ø): 230V 460V 575V  
 Full load amps: 8.5 4.2 3.4  
 Versions: 3" Standard  
 Imp. Code 242  
 Discharge conn.: Male NPT  
 Pump dimensions: 9<sup>3</sup>/<sub>8</sub>" W x 23<sup>3</sup>/<sub>4</sub>" H  
 Max. weight (lbs.): 97  
 Description: Stainless steel construction; open impeller; rests on bottom strainer.

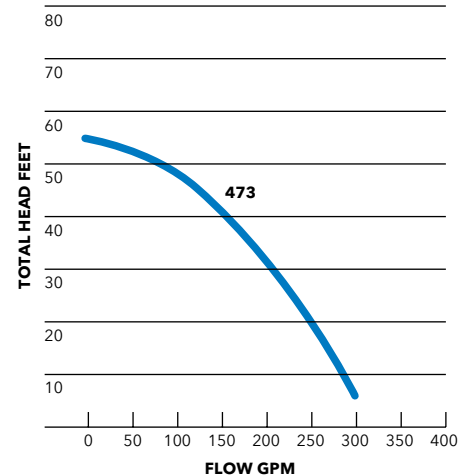


## BS 2740 (SS)

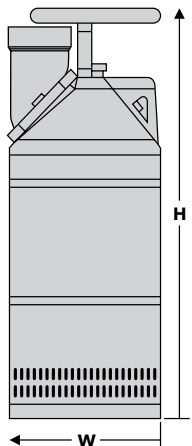

Model number: 2740.390  
 Motor rating: 9 HP@3455 RPM  
 Voltage (3Ø): 230V 460V 575V  
 Full load amps: 21A 11A 8.6A  
 Versions: 3" High head  
 Imp. Code 267  
 4" Standard  
 Imp. Code 242  
 Hose connection: Male NPT  
 Pump dimensions: 11" W (max.) x 28<sup>3</sup>/<sub>4</sub>" H (max.)  
 Max. weight (lbs.): 165  
 Description: Stainless steel construction; open impellers; rests on bottom strainer.

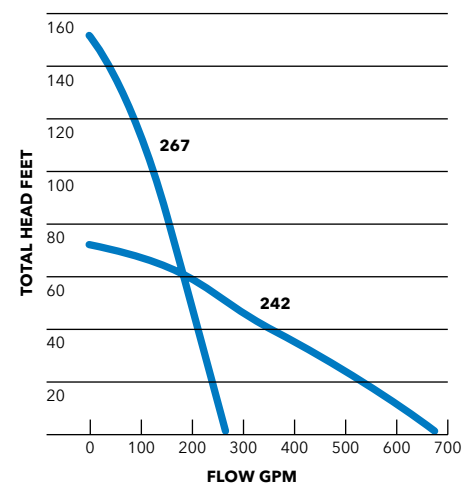

## BS 2750 (SS)

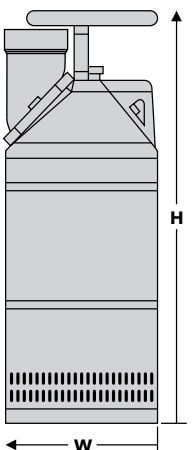

Model number: 2750.390  
 Motor rating: 13 HP@3455 RPM  
 Voltage (3Ø): 230V 460V 575V  
 Full load amps: 31A 15A 12A  
 Versions: 3" High head  
 Imp. Code 267  
 4" Standard  
 Imp. Code 242  
 Hose connection: Male NPT  
 Pump dimensions: 11" W (max.) x 31" H (max.)  
 Max. weight (lbs.): 198  
 Description: Stainless steel construction; open impellers; rests on bottom strainer.

