



C 3102

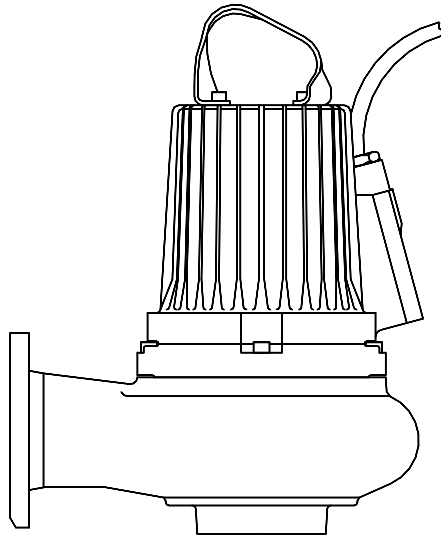

Weight, kg	CP	CT/CZ	CS
LT	117	163	135
MT	112	132	121
HT	105	-	114


- Can be equipped with flush valve.
- * NEVACLOG

CP/CS/CT/CZ

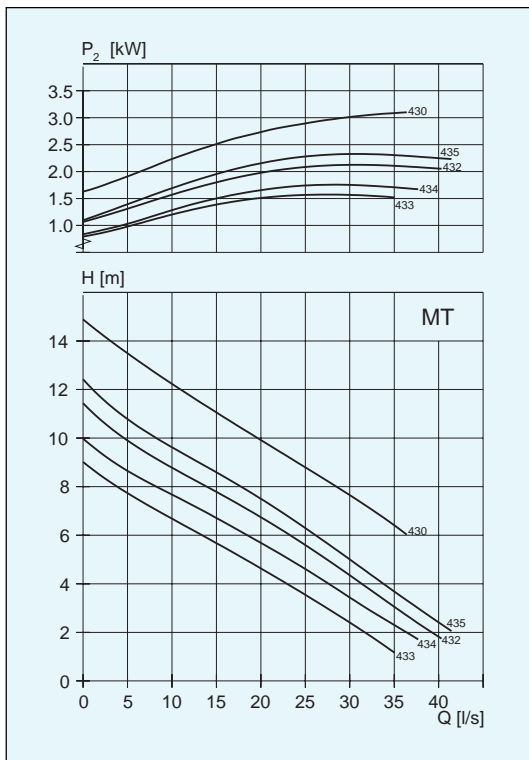


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
W• 430*	1	100	∅ 76	3.8	3.1	1440	CP/CS
W• 432*	1	100	∅ 76	3.8	3.1	1440	CP/CS
W• 433*	1	100	∅ 76	3.8	3.1	1440	CP/CS
W• 434*	1	100	∅ 76	3.8	3.1	1440	CP/CS
W• 435*	1	100	∅ 76	3.8	3.1	1440	CP/CS
432	1	100	∅ 76	2.9	2.4	1455	CT/CZ
433	1	100	∅ 76	2.9	2.4	1455	CT/CZ
434	1	100	∅ 76	2.9	2.4	1455	CT/CZ
435	1	100	∅ 76	2.9	2.4	1455	CT/CZ

CP/CS/CT/CZ

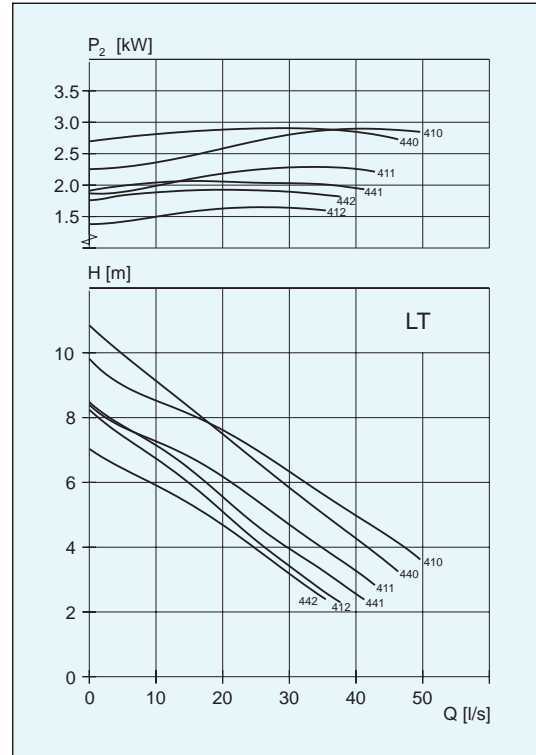

Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
W• 410	2	100/150	55 x 100	3.8	3.1	1435	CP/CS
W• 411	2	100/150	52 x 96	3.8	3.1	1435	CP/CS
W• 412	2	100/150	54 x 88	3.8	3.1	1435	CP/CS
W• 440	1	100/150	∅ 100	3.8	3.1	1435	CP/CS
W• 441	1	100/150	∅ 100	3.8	3.1	1435	CP/CS
W• 442	1	100/150	∅ 100	3.8	3.1	1435	CP/CS
411	2	100/150	52 x 96	2.9	2.4	1450	CT/CZ
412	2	100/150	54 x 88	2.9	2.4	1450	CT/CZ
441	1	100/150	∅ 100	2.9	2.4	1450	CT/CZ
442	1	100/150	∅ 100	2.9	2.4	1450	CT/CZ

CP/CS

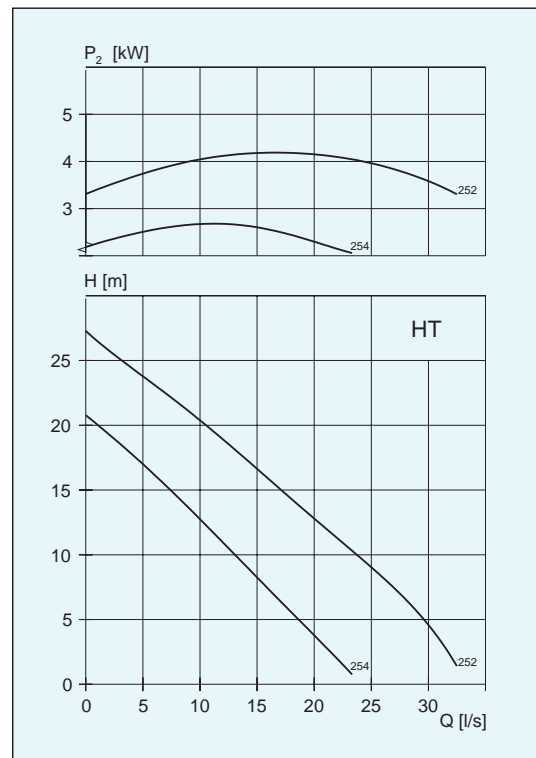

Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
• 252	1	80	∅ 52	5.4	4.4	2870	CP/CS
• 254	1	80	∅ 52	5.4	4.4	2870	CP/CS