



# C 3152

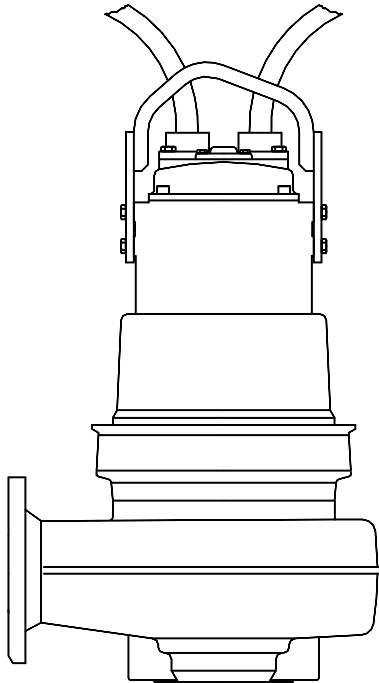

Weight, kg (with cooling jacket)	CP	CS	CT/CZ
LT	368	425	466
MT	279	320	348
HT	270	289	314


# CP/CS/CT/CZ

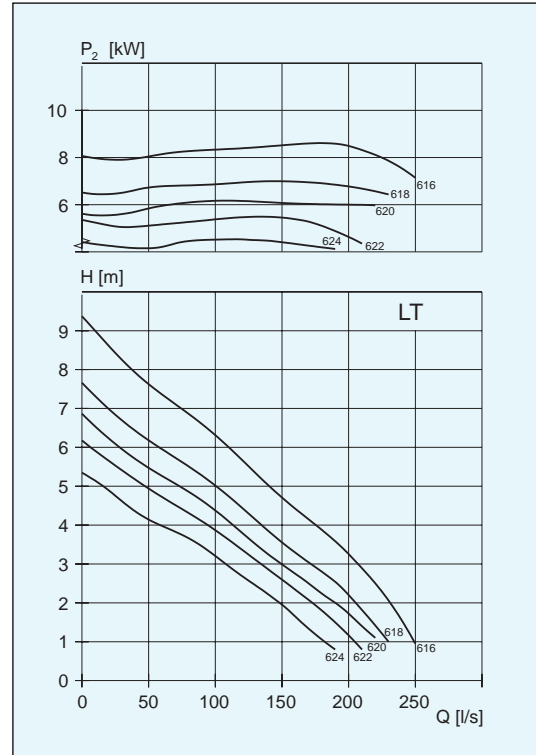

Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P <sub>1</sub>	P <sub>2</sub>		
W• 616	2	300	102 x 102	10.5	8.8	955	CP/CS/CT/CZ
W• 618	2	300	102 x 102	10.5	8.8	955	CP/CS/CT/CZ
W• 620	2	300	102 x 102	10.5	8.8	955	CP/CS/CT/CZ
W• 622	2	300	102 x 102	10.5	8.8	955	CP/CS/CT/CZ
W• 624	2	300	102 x 102	10.5	8.8	955	CP/CS/CT/CZ

• Can be equipped with flush valve


# CP/CS/CT/CZ

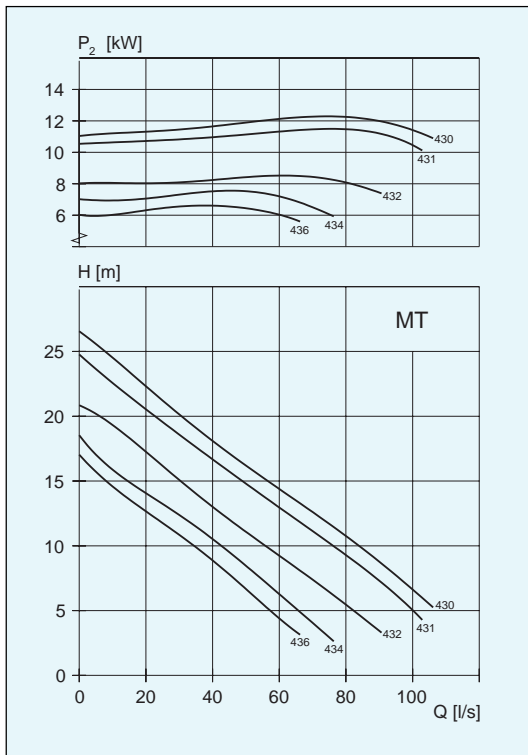

Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P <sub>1</sub>	P <sub>2</sub>		
• 430	1	200	100 x 115	15.8	13.5	1450	CP/CS/CT/CZ
W• 431	1	200	100 x 110	15.8	13.5	1450	CP/CS/CT/CZ
W• 432	1	200	109 x 100	15.8	13.5	1450	CP/CS/CT/CZ
• 432	1	200	109 x 100	10.7	9	1455	CP/CS/CT/CZ
W• 434	1	200	100 x 100	15.8	13.5	1450	CP/CS/CT/CZ
• 434	1	200	100 x 100	10.7	9	1455	CP/CS/CT/CZ
W• 436	1	200	100 x 93	15.8	13.5	1450	CP/CS/CT/CZ
• 436	1	200	100 x 93	10.7	9	1455	CP/CS/CT/CZ

• Can be equipped with flush valve

# CP/CS/CT/CZ

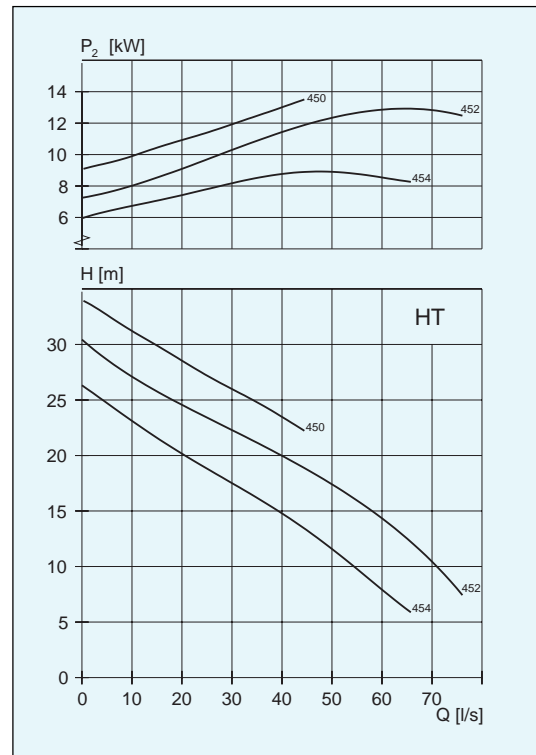

Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P <sub>1</sub>	P <sub>2</sub>		
W• 450	1	100/150	∅ 76	15.8	13.5	1450	CP/CS/CT/CZ
W• 452	1	100/150	∅ 76	15.8	13.5	1450	CP/CS/CT/CZ
W• 454	1	100/150	∅ 76	15.8	13.5	1450	CP/CS/CT/CZ
• 454	1	100/150	∅ 76	10.7	9	1455	CP/CS/CT/CZ

• Can be equipped with flush valve