



C 3152 SH

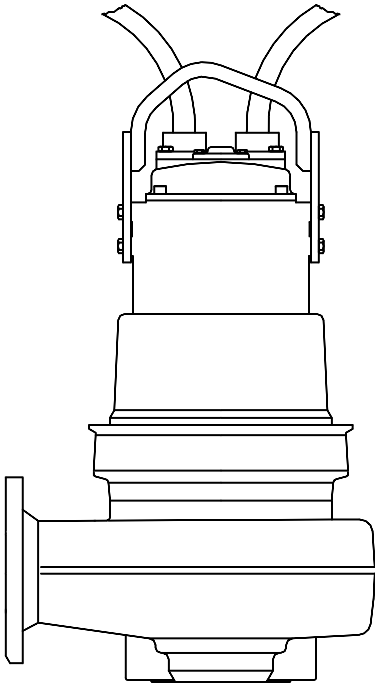

Weight, kg (with cooling jacket)	CP	CS	CT/CZ
SH	262	261	266

CP/CS/CT/CZ

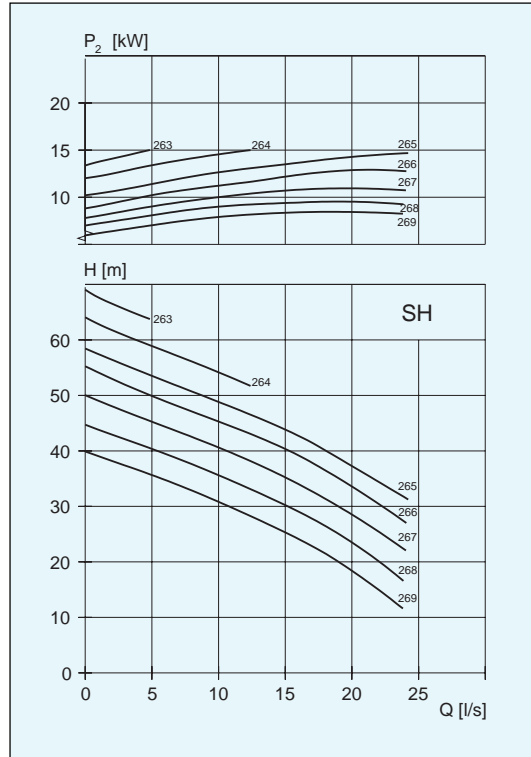

Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
•263	1	100	40 x 40	17.0	15	2920	CP/CS/CT/CZ
•264	1	100	40 x 40	17.0	15	2920	CP/CS/CT/CZ
•265*	1	100	40 x 40	17.0	15	2920	CP/CS/CT/CZ
•266*	1	100	40 x 40	17.0	15	2920	CP/CS/CT/CZ
•267*	1	100	40 x 40	17.0	15	2920	CP/CS/CT/CZ
•268*	1	100	40 x 40	17.0	15	2920	CP/CS/CT/CZ
•269*	1	100	40 x 40	17.0	15	2920	CP/CS/CT/CZ

* NPSH_{re} = 11 m at 20 l/s • Can be equipped with flush valve