



D 3085

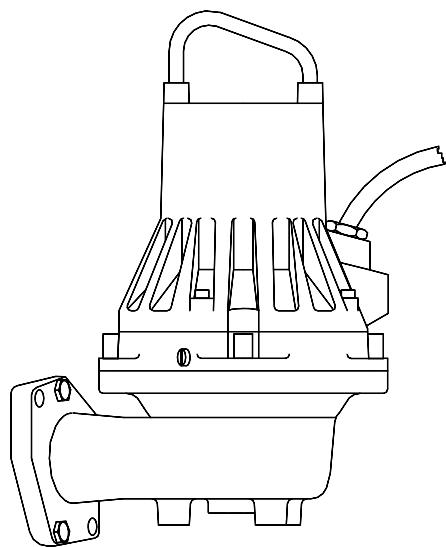

Weight, kg	DP	DS
MT	51	55
HT	51	55


• Can be equipped with flush valve

DP/DS

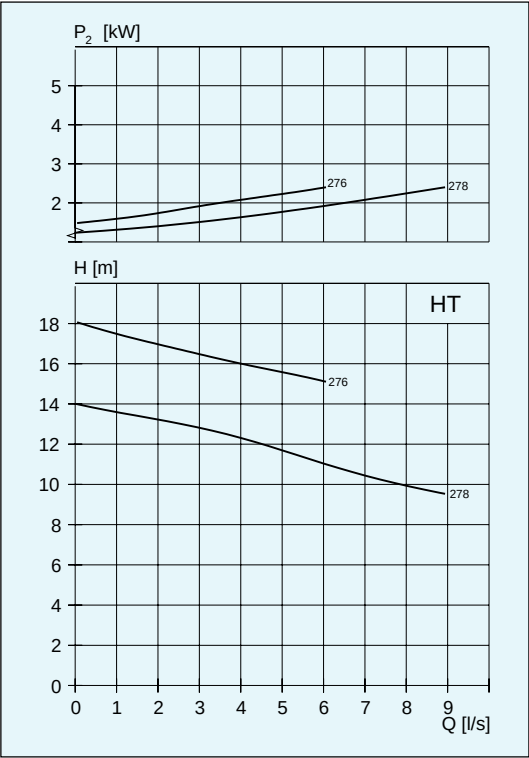

Impeller code	Outlet dia mm DP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
			P ₁	P ₂		
276	80	Ø 52	3.0	2.4	2830	DP/DS
278	80	Ø 52	3.0	2.4	2830	DP/DS


DP/DS

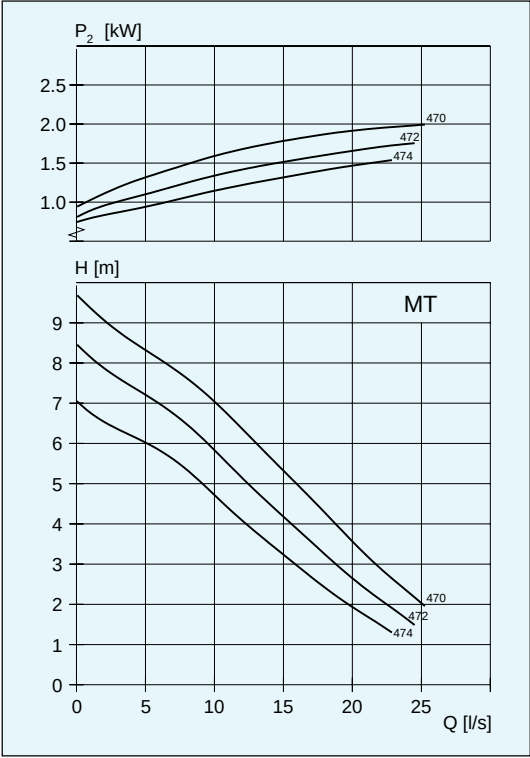

Impeller code	Outlet dia mm DP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
			P ₁	P ₂		
• 470	80	Ø 76	2.7	2.0	1395	DP/DS
• 472	80	Ø 76	2.7	2.0	1395	DP/DS
• 474	80	Ø 76	2.7	2.0	1395	DP/DS
• 474 *	80	Ø 76	1.8	1.3	1380	DP/DS
• 472 *	80	Ø 76	2.0	1.5	1440	DP/DS
• 474 *	80	Ø 76	2.0	1.5	1440	DP/DS

* Single phase

DP/DS Hardened cast iron

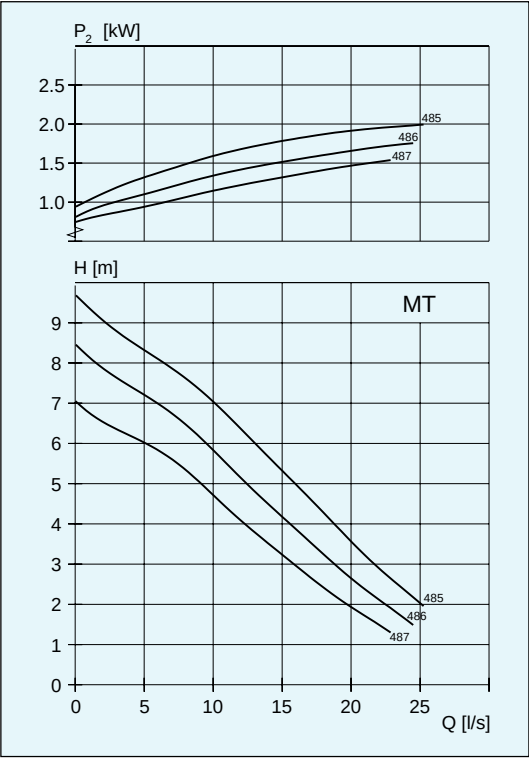

Impeller code	Outlet dia mm DP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
			P ₁	P ₂		
• 485	80	Ø 76	2.7	2.0	1395	DP/DS
• 486	80	Ø 76	2.7	2.0	1395	DP/DS
• 487	80	Ø 76	2.7	2.0	1395	DP/DS
• 487 *	80	Ø 76	1.8	1.3	1380	DP/DS
• 486 *	80	Ø 76	2.0	1.5	1440	DP/DS
• 487 *	80	Ø 76	2.0	1.5	1440	DP/DS

* Single phase