


MP 3102 HT 3~ 261
Technical specification



Curve according to: ISO 9906

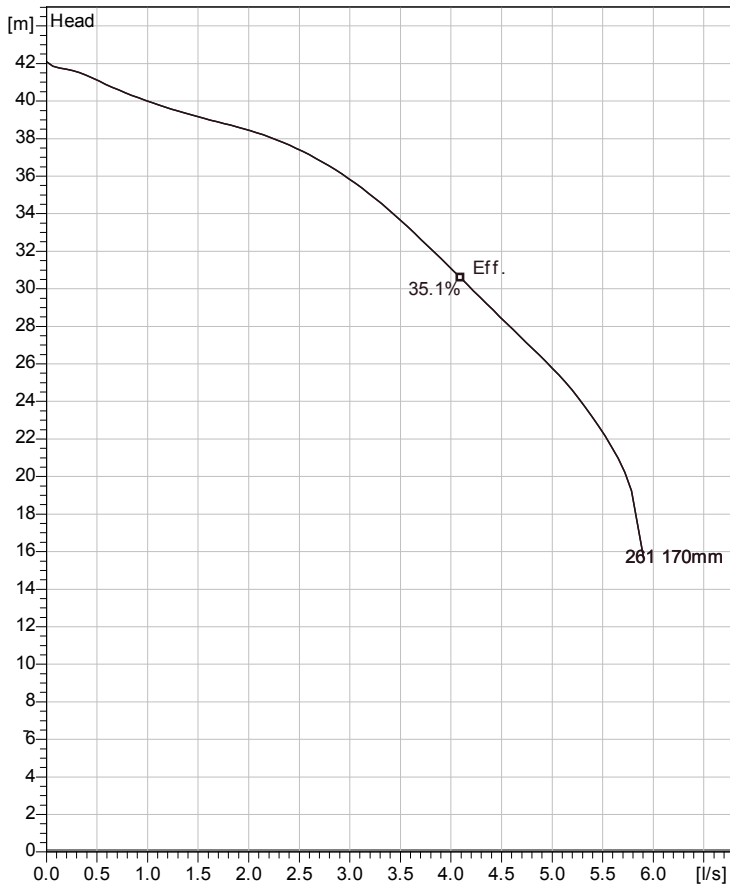

Note: Picture might not correspond to the current configuration.

General

Semi-open multi-channel impellers with integral grinder cutter in single volute casing for liquids containing solids and fibres.

Impeller

Impeller material	Grey cast iron
Outlet width	40 mm
Inlet diameter	80 mm
Impeller diameter	170 mm
Number of blades	6

Motor

Motor #	M3102.170 18-10-2AL-W 4,4KW
Stator variant	
Frequency	50 Hz
Rated voltage	415 V
Number of poles	2
Phases	3~
Rated power	4.4 kW
Rated current	8.2 A
Starting current	54 A
Rated speed	2855 rpm
Power factor	
1/1 Load	0.94
3/4 Load	0.92
1/2 Load	0.88
Efficiency	
1/1 Load	79.5 %
3/4 Load	81.0 %
1/2 Load	80.5 %

Configuration

Installation: P - Semi permanent, Wet

Project	Project ID	Created by	Created on 2012-10-25	Last update
---------	------------	------------	---------------------------------	-------------

MP 3102 HT 3~ 261

Performance curve


Pump

Outlet width	40 mm
Inlet diameter	80 mm
Impeller diameter	170 mm
Number of blades	6

Motor

Motor #	M3102.170 18-10-2AL-W 4,4KW
Stator variant	
Frequency	50 Hz
Rated voltage	415 V
Number of poles	2
Phases	3~
Rated power	4.4 kW
Rated current	8.2 A
Starting current	54 A
Rated speed	2855 rpm


Power factor	
1/1 Load	0.94
3/4 Load	0.92
1/2 Load	0.88
Efficiency	
1/1 Load	79.5 %
3/4 Load	81.0 %
1/2 Load	80.5 %

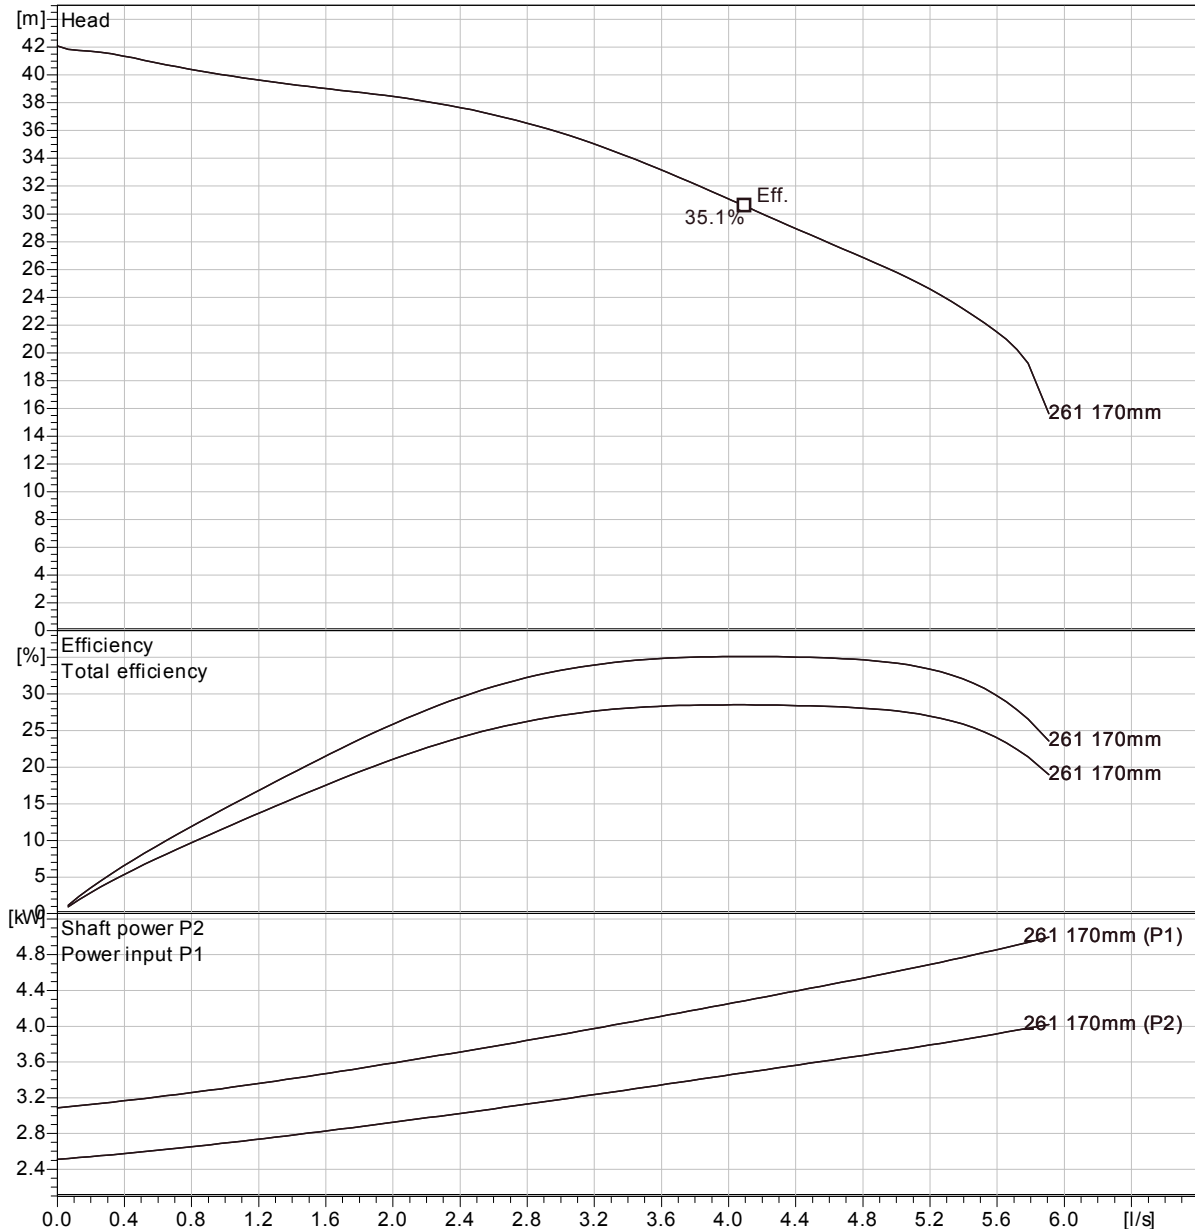

Curve according to: ISO 9906

Project	Project ID	Created by	Created on 2012-10-25	Last update
---------	------------	------------	---------------------------------	-------------

MP 3102 HT 3~ 261
Duty Analysis

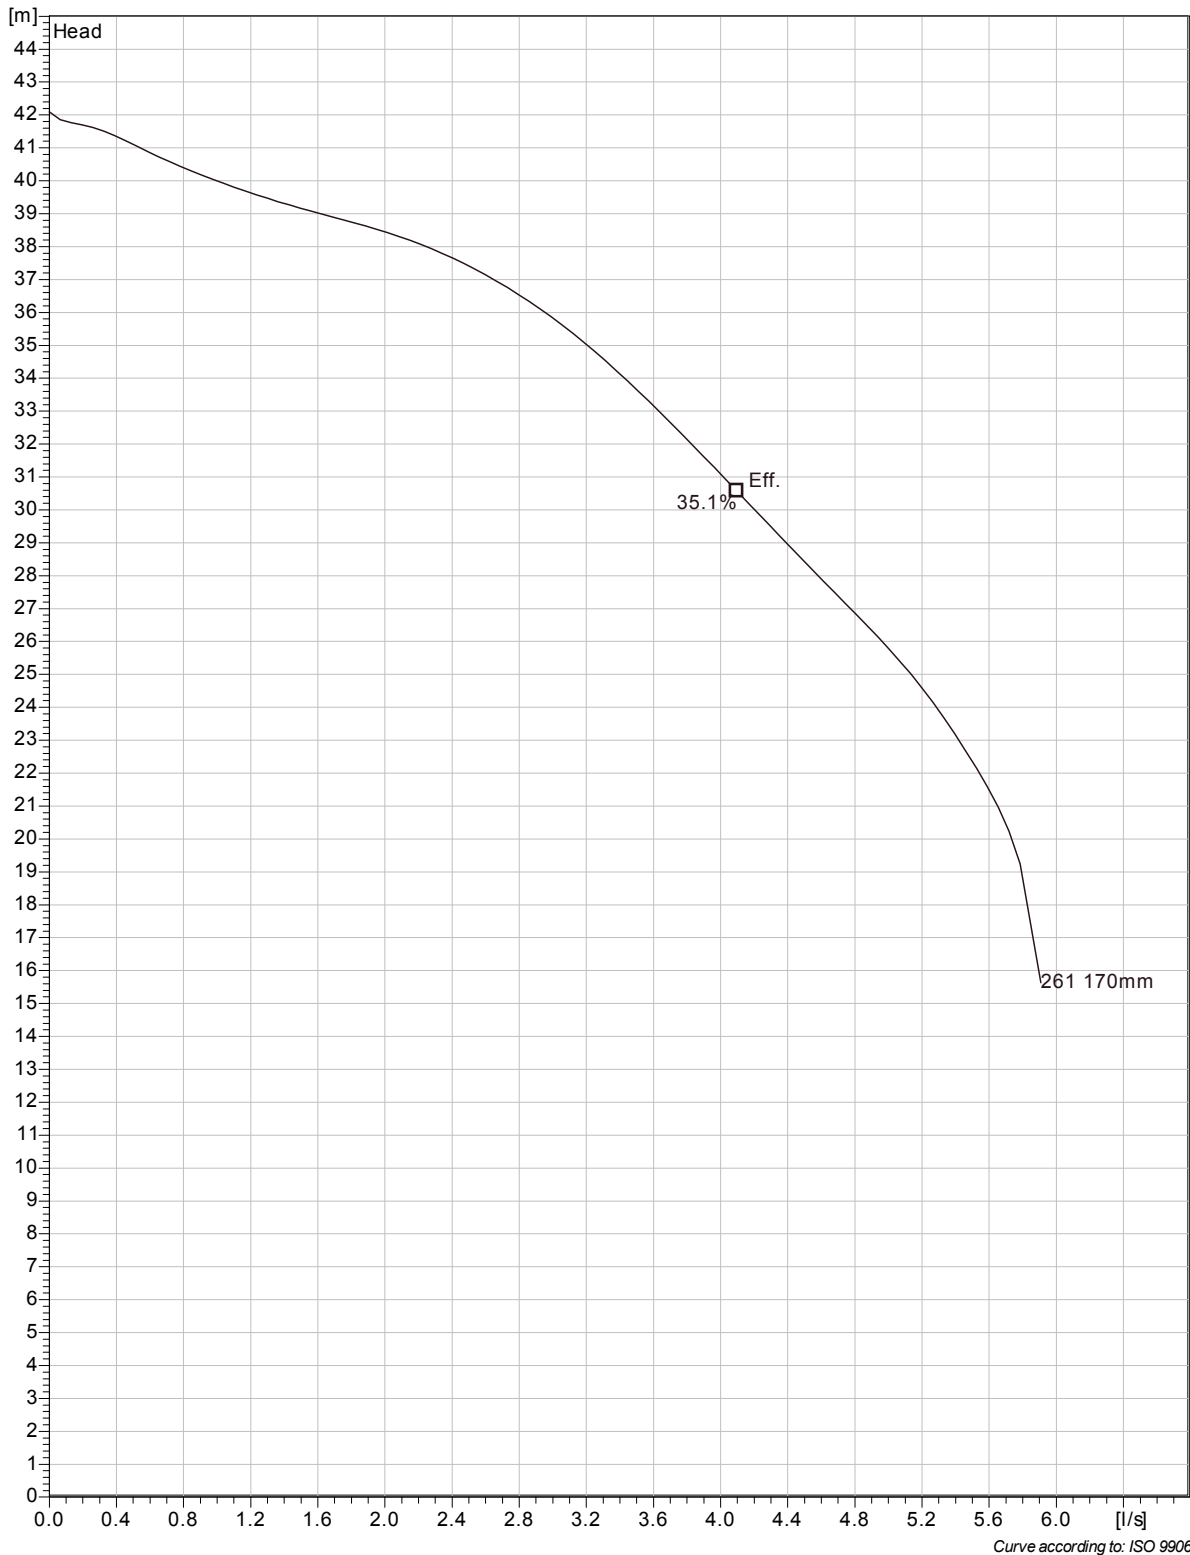

Project	Project ID	Created by	Created on	Last update
			2012-10-25	