
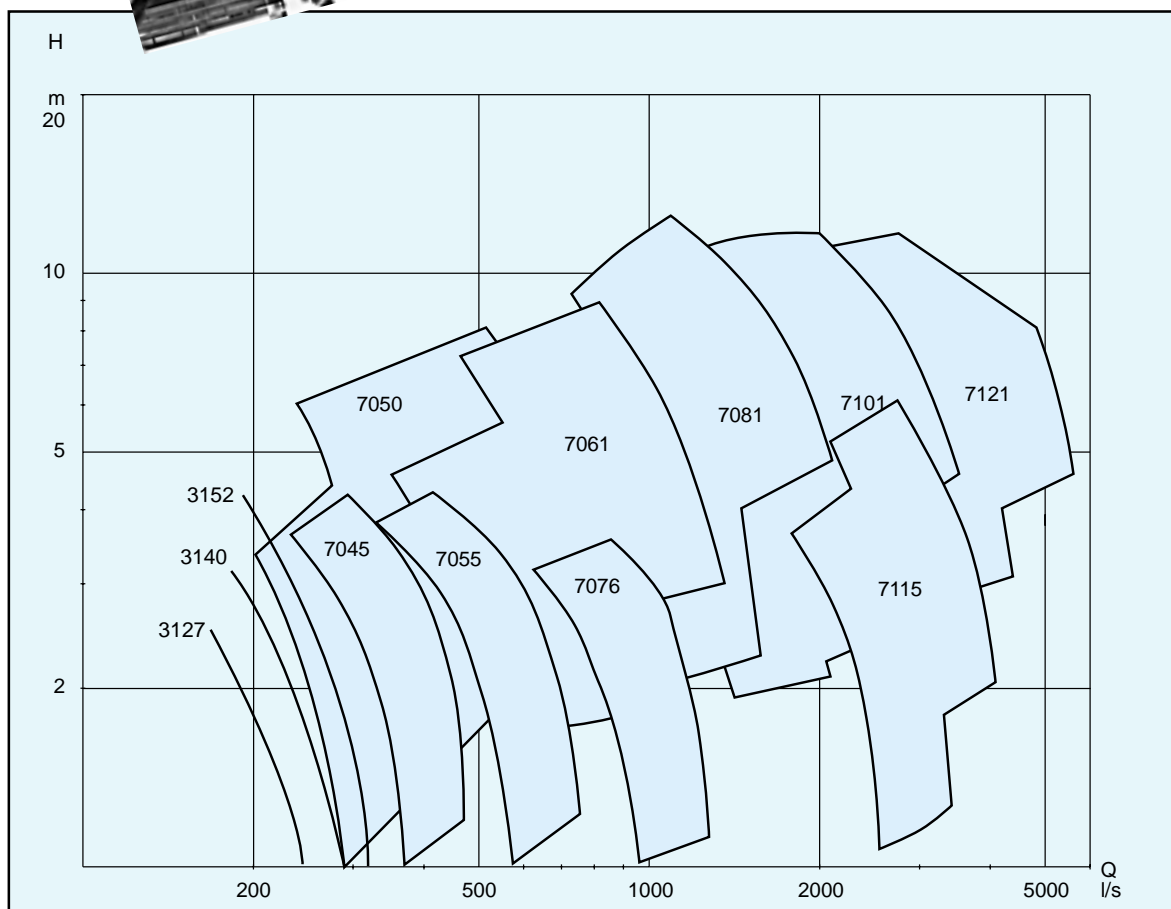



# PROPELLER-PUMPS • 50 Hz

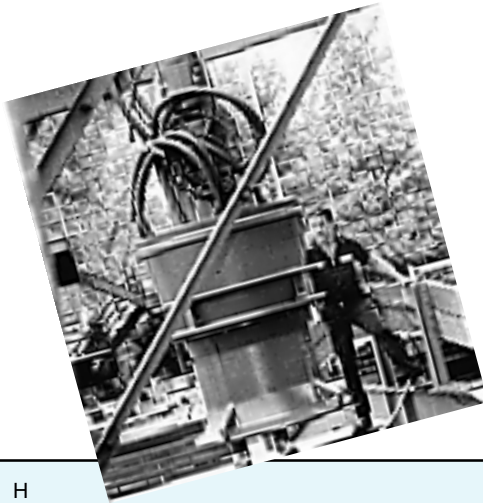


The propeller is dynamically balanced for minimum vibration and maximum life of seals and bearings.

Its new, hydrodynamic, conical design affords more efficient pumping.


Moreover, the propeller's swept-back blades (for low-clogging performance) are numerically machined to match the pump's specified duty point.



# P 3127

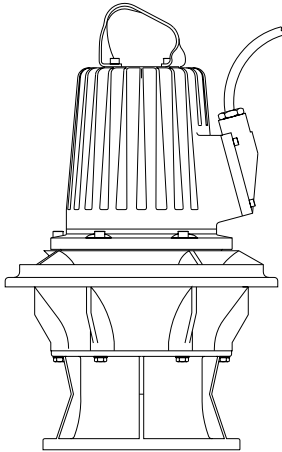


## PL

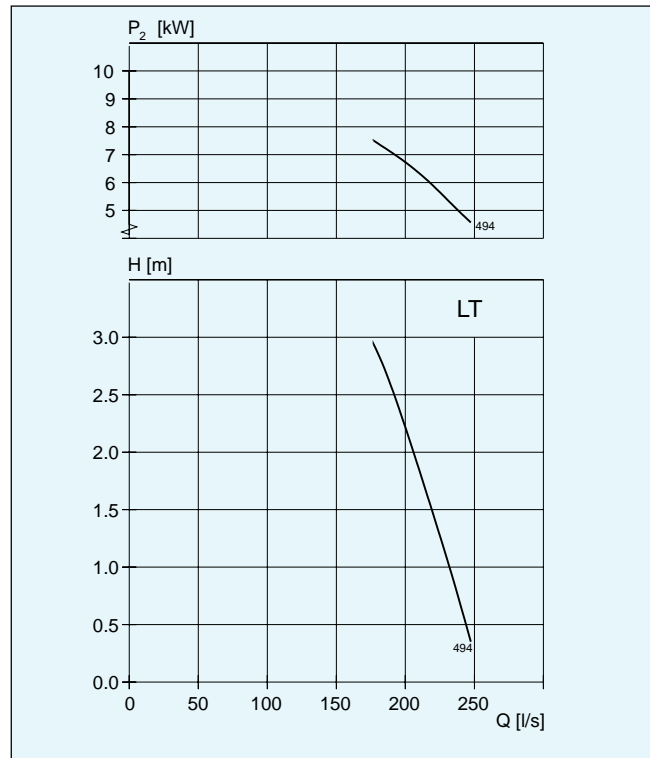


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Max weight kg
		$P_1$	$P_2$		
494	∅490	9.1	7.5	1435	182

# P 3140

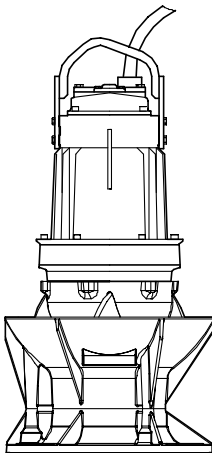

## PL

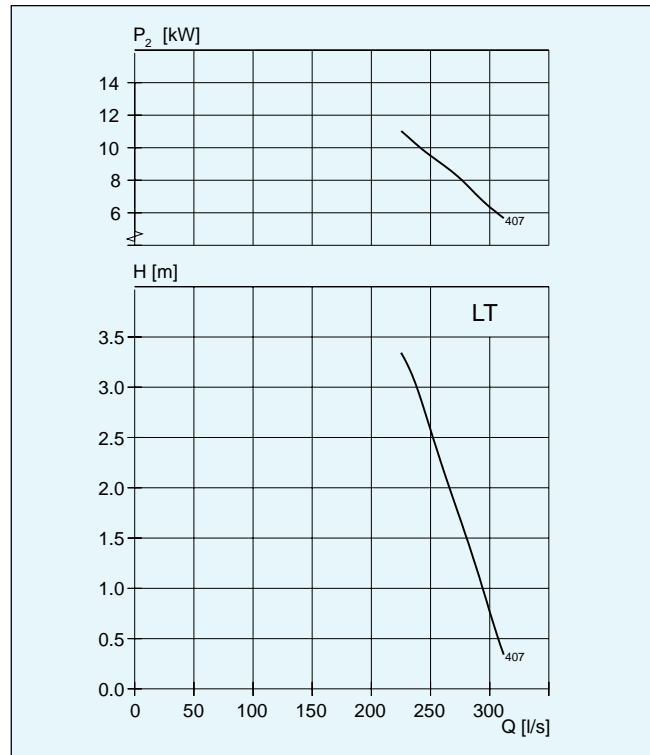

Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Max weight kg
		$P_1$	$P_2$		
407	∅575	13.3	11	1440	270