

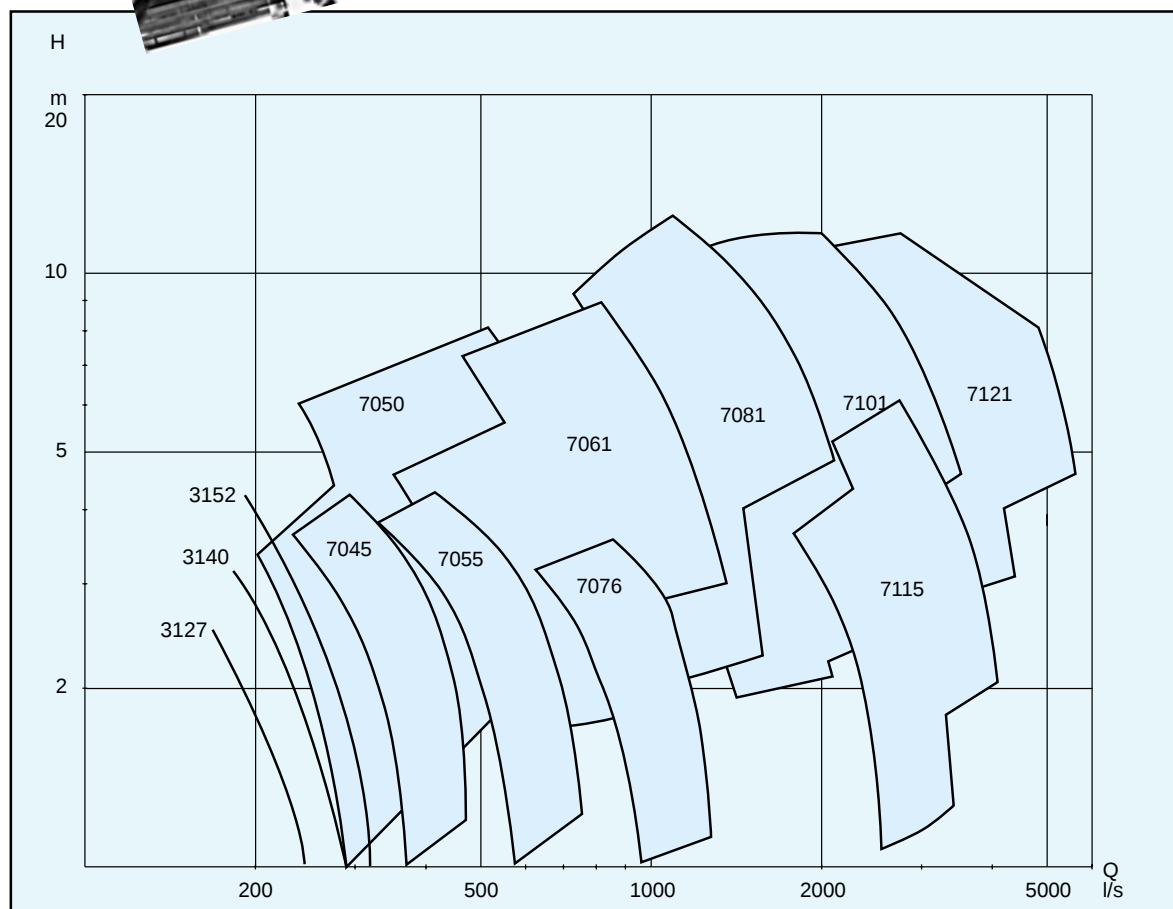



PROPELLER-PUMPS • 50 Hz

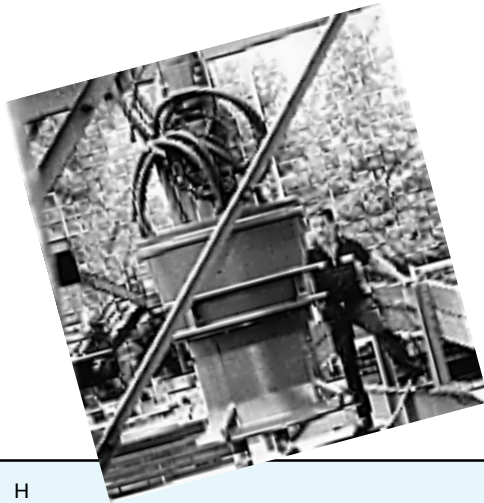


The propeller is dynamically balanced for minimum vibration and maximum life of seals and bearings. Its new, hydrodynamic, conical design affords more efficient pumping. Moreover, the propeller's swept-back blades (for low-clogging performance) are numerically machined to match the pump's specified duty point.



P 3127

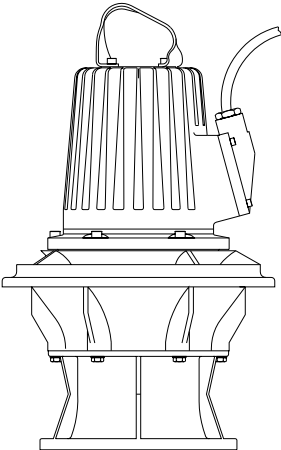


PL

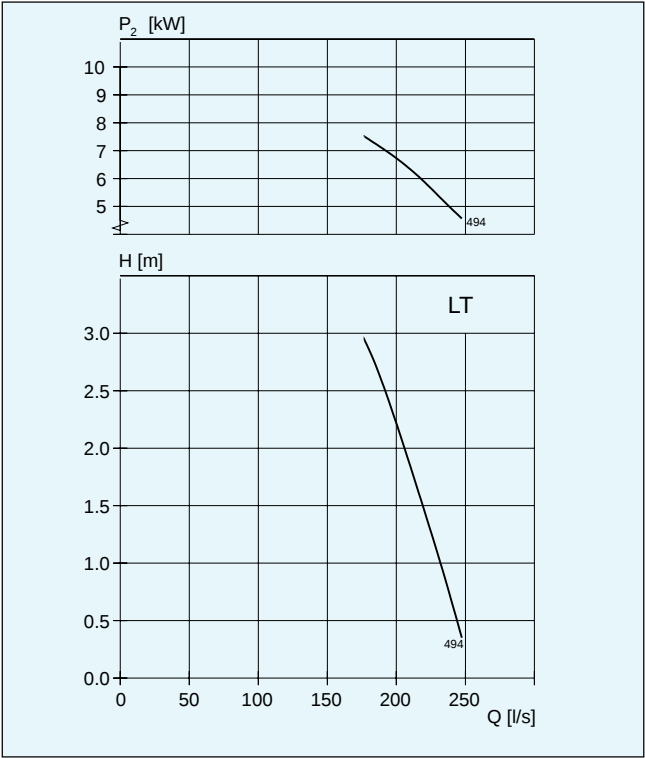


Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Max weight kg
		P_1	P_2		
494	Ø 490	9.1	7.5	1435	182

P 3140

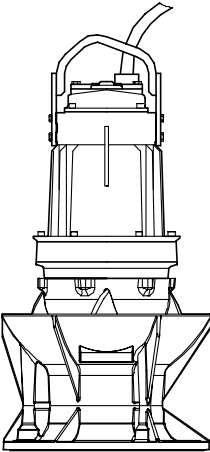

PL

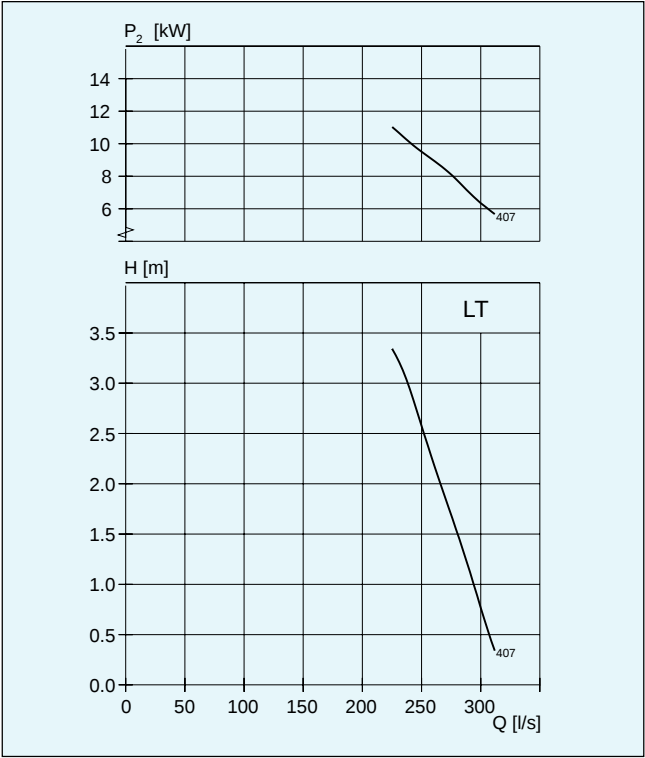

Curve code	Overall diam. mm diff. ring	Motor rating, kW		rpm	Max weight kg
		P_1	P_2		
407	Ø 575	13.3	11	1440	270