



C- AND R-PUMPS • 50 Hz


LARGE SIZE

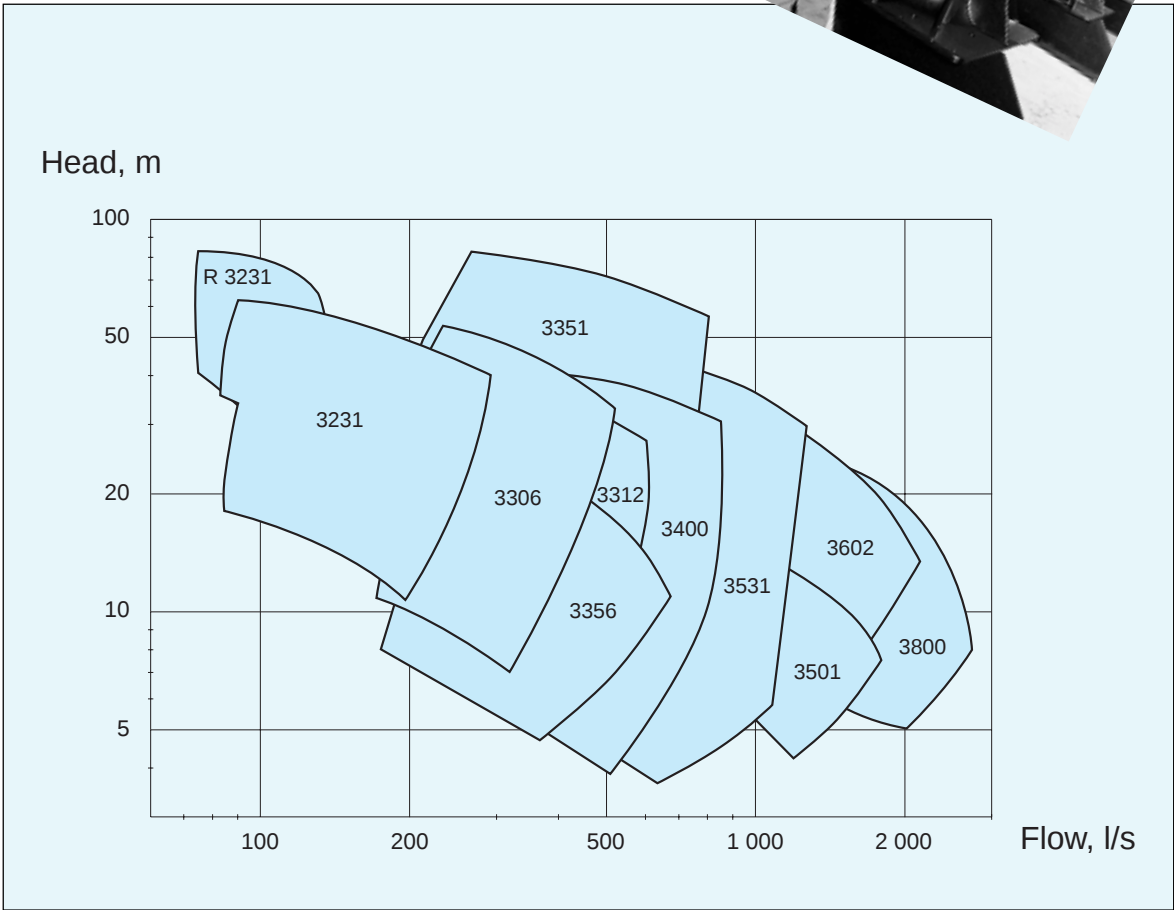

The C-pumps are equipped with shrouded multi-channel impellers running in a volute. The shape and the size of the channel minimize clogging, and therefore make the pump ideal for waste water containing large solid particles.

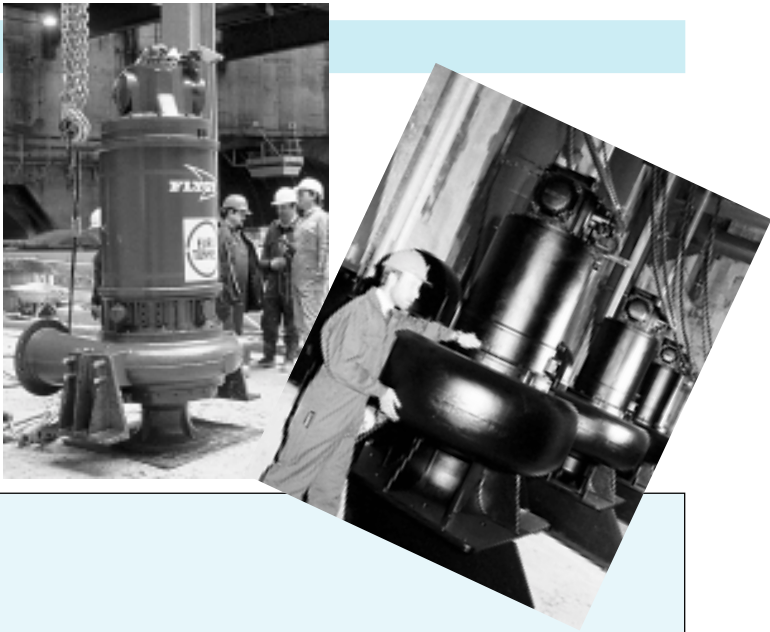


CP/CS/CT/CZ

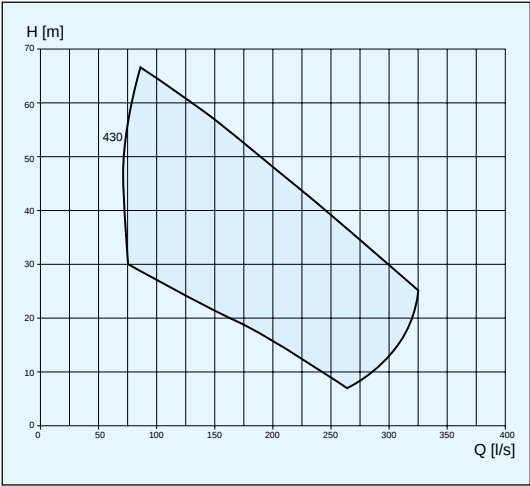


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
430	2	200	Ø 88	76-181	70-170	1485	CP/CS/CT/CZ

3231

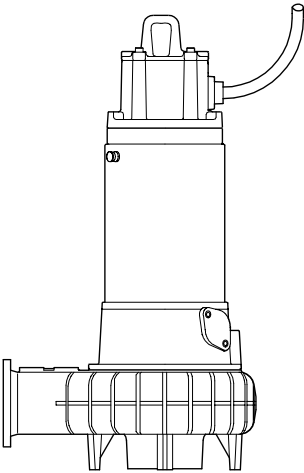


	CP	CS	CT	CZ
Max weight, kg	1820	1910	1730	1730

CP/CS/CT/CZ

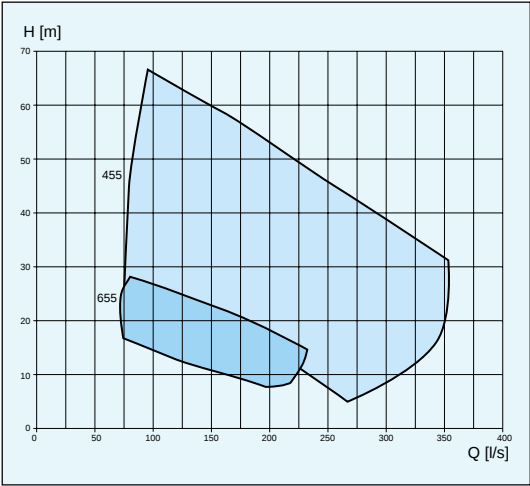


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
455	2	200	Ø 102	76-181	70-170	1485	CP/CS/CT/CZ
655	2	200	Ø 102	64	58	985	CP/CS/CT/CZ

RP/RT

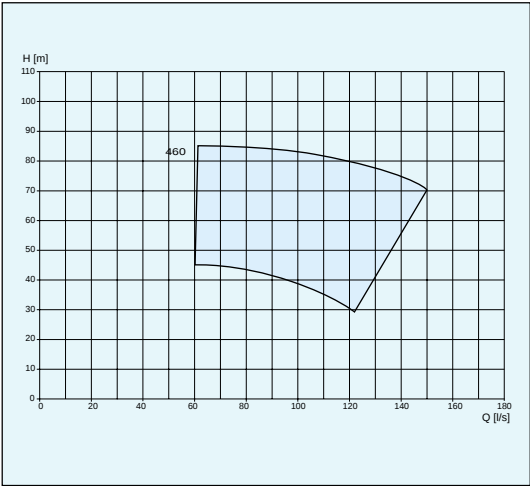


Impeller code	No. of vanes	Outlet dia mm RP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
460	6	150	Ø 24	76-181	70-170	1485	RP/RT

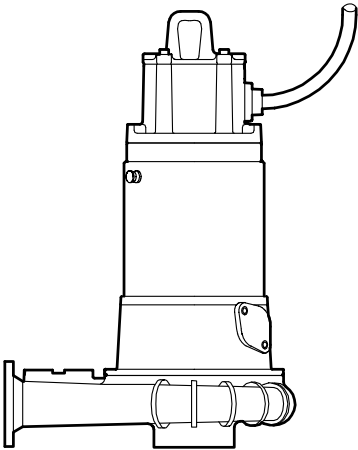


	RP	RT
Max weight, kg	1650	1620

RP/RT

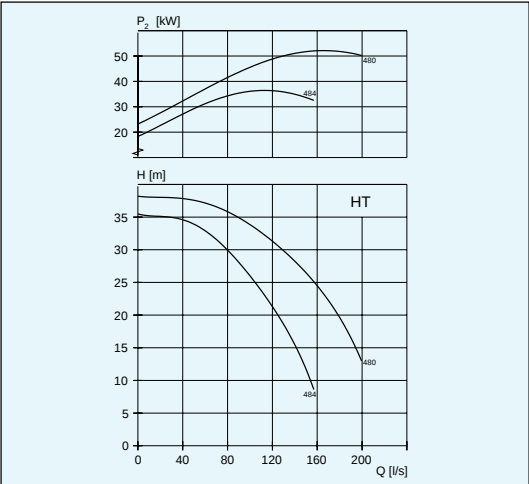


Impeller code	No. of vanes	Outlet dia mm	Through-let, mm	Motor rating kW P_1 P_2	rpm	Available versions
480	6	150	37 x 37	45	1475	RP/RT
484	6	150	32 x 32	60	1475	RP/RT

R 3300

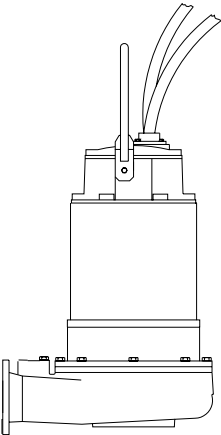


	RP	RT
Max weight, kg	820	943

CP/CS/CT/CZ

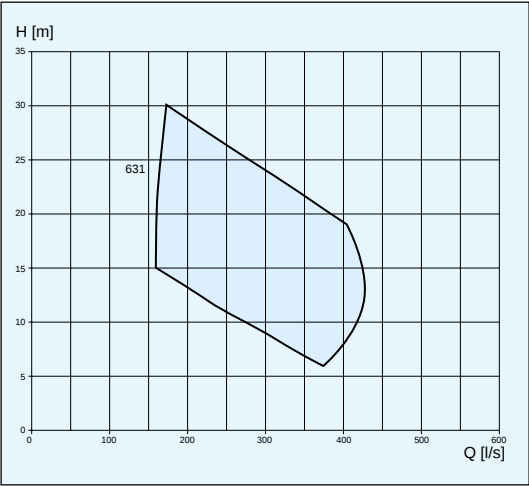


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW P_1 P_2	rpm	Available versions
631	3	300	Ø 104	64-150	985	CP/CSCT/CZ

3306

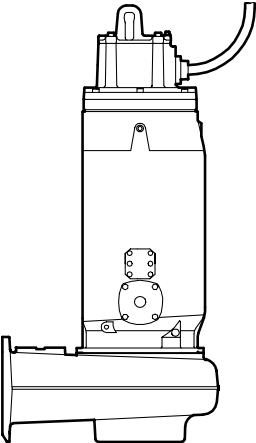


	CP	CS	CT	CZ
Max weight, kg	1920	2005	1820	1820

CP/CS/CT/CZ

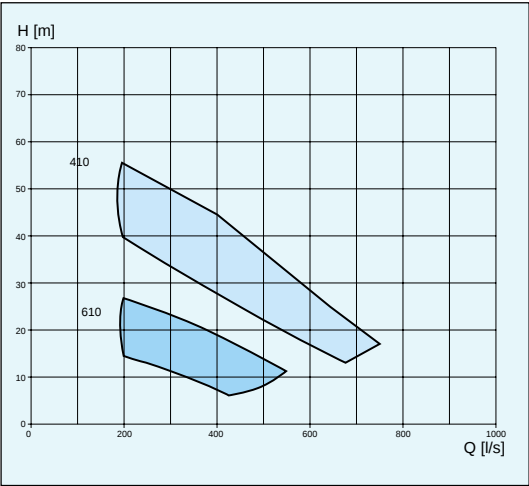


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW P_1 P_2	rpm	Available versions
410	3	300	Ø 104	181-228	1480	CP/CSCT/CZ
610	3	300	Ø 104	64-150	985	CP/CSCT/CZ

CP/CS/CT/CZ

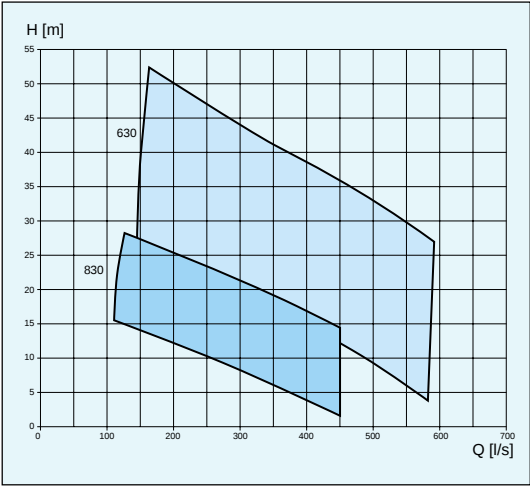


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
630	3	300	Ø 102	P ₁	P ₂	990	CP/CS/CT/CZ
830	3	300	Ø 102	109-265	100-250	735	CP/CS/CT/CZ

3312

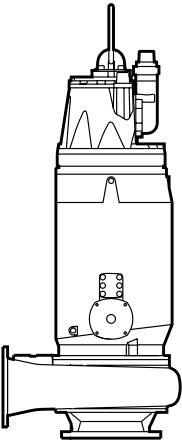


	CP	CS	CT	CZ
Max weight, kg	3150	3325	3050	3050

CP/CT/CZ

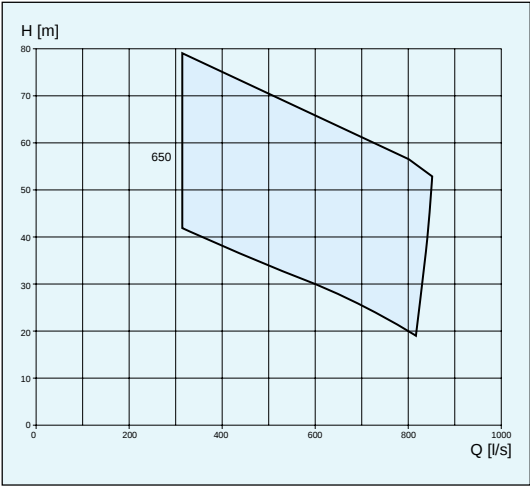


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
650	2	350	Ø 110	P ₁	P ₂	995	CP/CT/CZ
				305-583	290-560		

3351

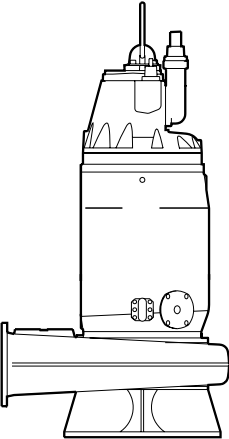


	CP	CT	CZ
Max weight, kg	5500	5520	5250

CP/CT/CZ

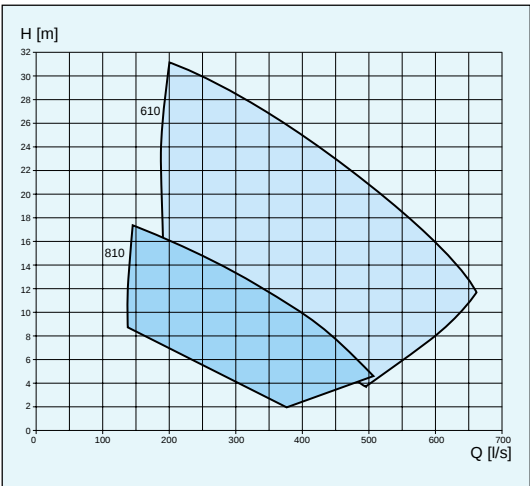


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
610	3	350	Ø 102	P ₁	P ₂	990	CP/CT/CZ
810	3	350	Ø 102	64-150	58-140	735	CP/CT/CZ
				51-61	45-55		

3356

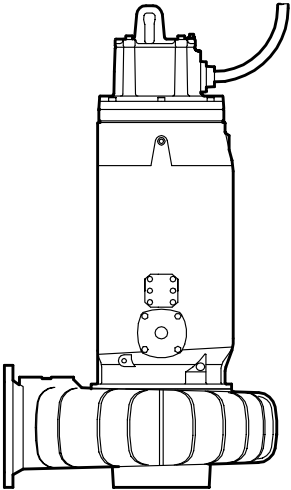


	CP	CT	CZ
Max weight, kg	2050	1950	1950

CP/CT/CZ

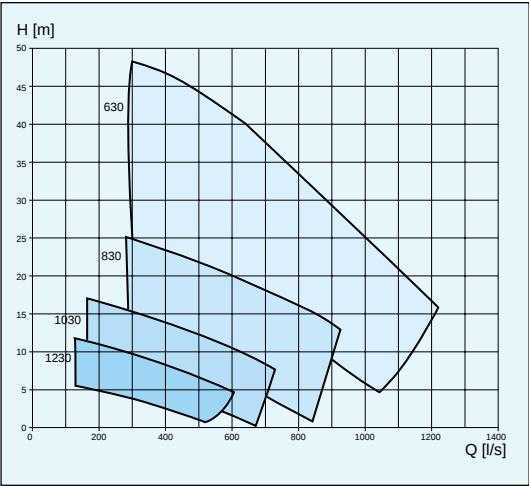


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
630	3	400	110	191-327	180-310	990	CP/CT/CZ
830	3	400	110	100-172	90-160	735	CP/CT/CZ
1030	3	400	110	44-99	40-90	585	CP/CT/CZ
1230	3	400	110	34-45	30-40	490	CP/CT/CZ

3400

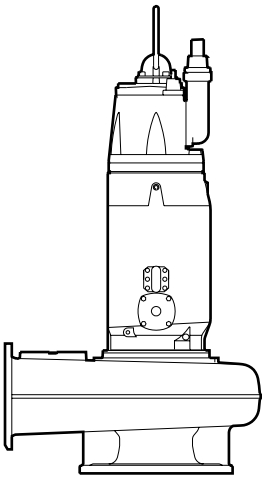


	CP	CT	CZ
Max weight, kg	3950	3700	3700

CP/CT/CZ

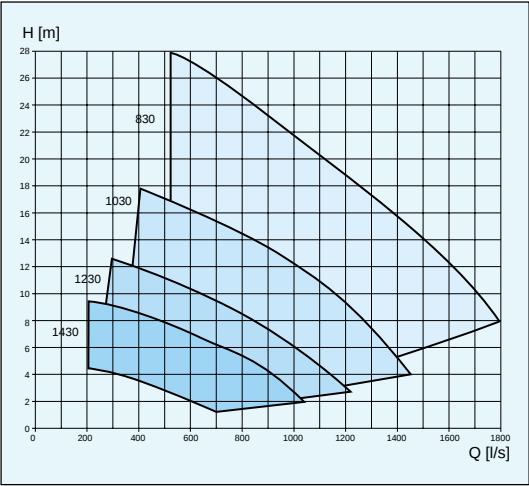


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
830	3	500	Ø 110	164-293	150-275	740	CP/CT/CZ
1030	3	500	Ø 110	99-183	90-170	590	CP/CT/CZ
1230	3	500	Ø 110	45-109	40-100	490	CP/CT/CZ
1430	3	500	Ø 110	46-68	40-60	420	CP/CT/CZ

3501

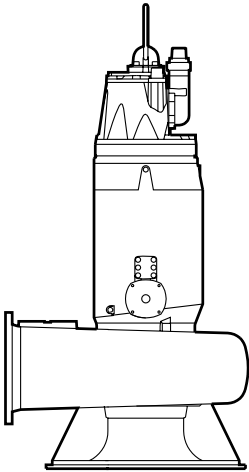


	CP	CT	CZ
Max weight, kg	4330	4100	4100

CP/CT/CZ

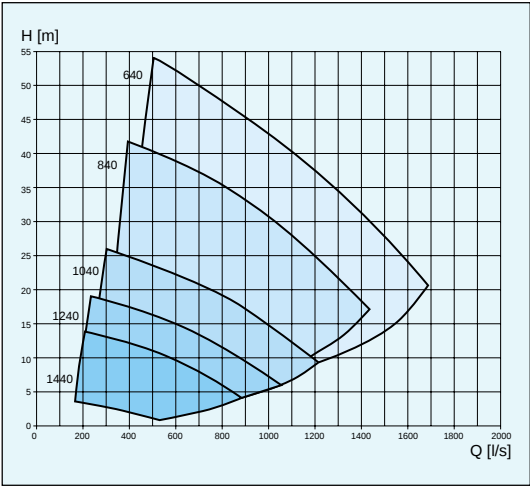


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
640	3	500	Ø 105	265-583	250-560	995	CP/CT/CZ
840	3	500	Ø 105	137-417	125-400	745	CP/CT/CZ
1040	3	500	Ø 105	67-231	60-215	590	CP/CT/CZ
1240	3	500	Ø 105	45-152	40-140	495	CP/CT/CZ
1440	3	500	Ø 105	46-79	40-70	420	CP/CT/CZ

3531

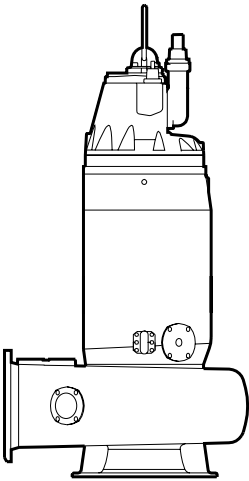


	CP	CT	CZ
Max weight, kg	5500	5300	5300

CP/CT/CZ

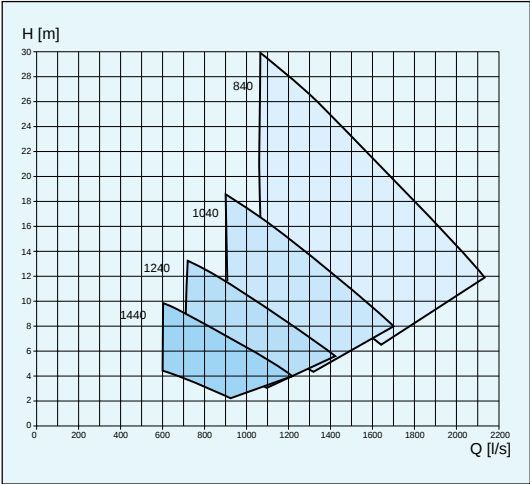


Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
840	4	600	Ø 126	230-479	215-460	745	CP/CT/CZ
1040	4	600	Ø 126	121-264	110-250	595	CP/CT/CZ
1240	4	600	Ø 126	67-152	60-140	495	CP/CT/CZ
1440	4	600	Ø 126	68-88	60-80	420	CP/CT/CZ

3602

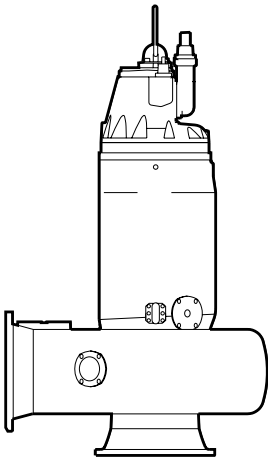


	CP	CT	CZ
Max weight, kg	6200	5950	5950

CP/CT/CZ

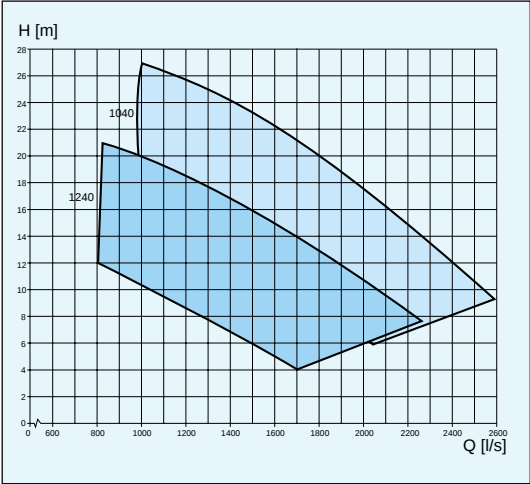

Impeller code	No. of vanes	Outlet dia mm CP vers.	Through-let, mm	Motor rating kW		rpm	Available versions
				P ₁	P ₂		
1040	4	800	Ø 140	342-473	325-450	595	CP/CT/CZ
1240	4	800	Ø 140	241-345	225-325	495	CP/CT/CZ

3800

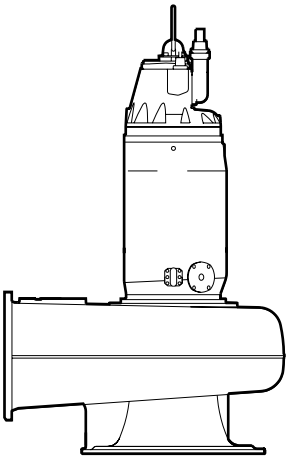

	CP	CT	CZ
Max weight, kg	9000	8600	8600