

Tecnotimer

Programmable stainless steel pumps for irrigation



Applications

Supply of water at pressure and programmed sprinklers irrigation per areas.

Materials

Pump Body

Stainless steel. AISI 304.

Impellers

Stainless steel. AISI 304.

Diffusers

Glass loaded Noryl.

Motor Shaft

Stainless steel. AISI 304

Mechanical Seal

Graphite and steatite.

Motor

Class F insulation.
IP 55 Protection.
Continuous operation.
Built-in thermal protection.

Limitations



Maximum suction lift: 9 m.
Maximum temperature of liquid: 35°C.

	A	B	C	D	E	F	G	H	I	J	K	Kg
	236.6	107.5	298.1	267	190.5	148.5	196.3	88	9	1"	1 1/4"	12.7

+ Dry running protection


**+ Self priming device
9m Suction**

+ 4 outlets for programmed irrigation

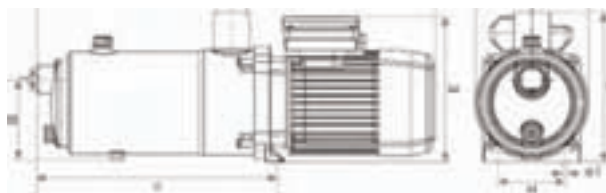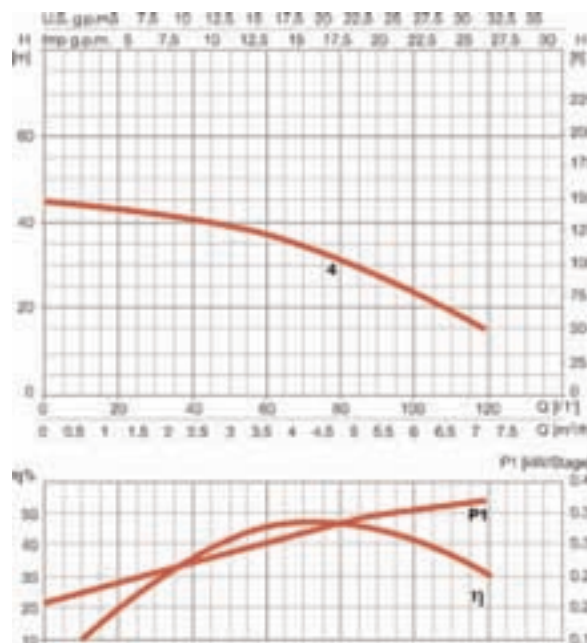


Programmable stainless
steel pumps for irrigation

Tecnotimer

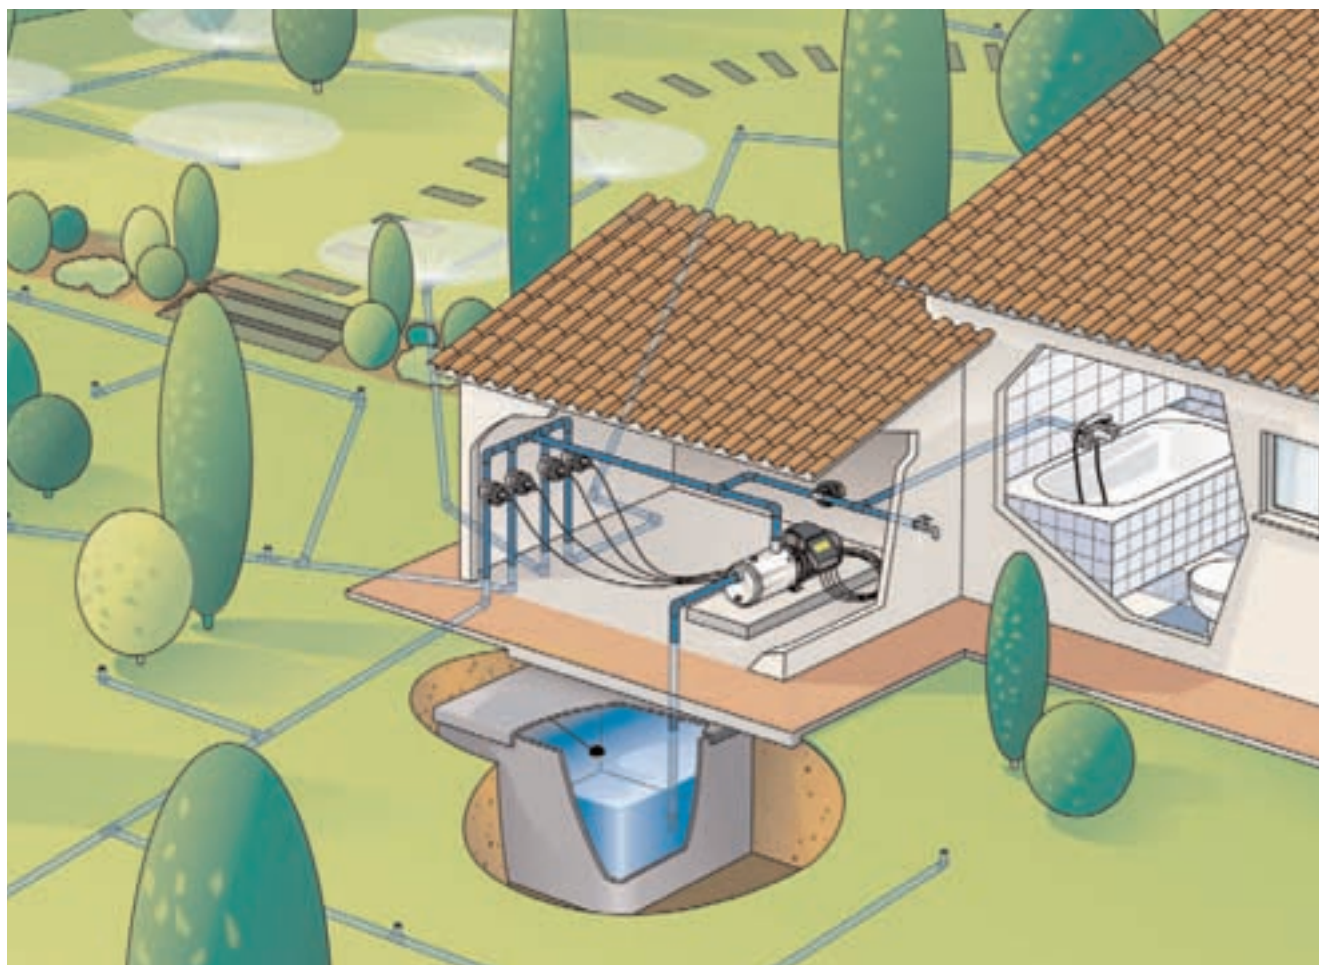

Surface

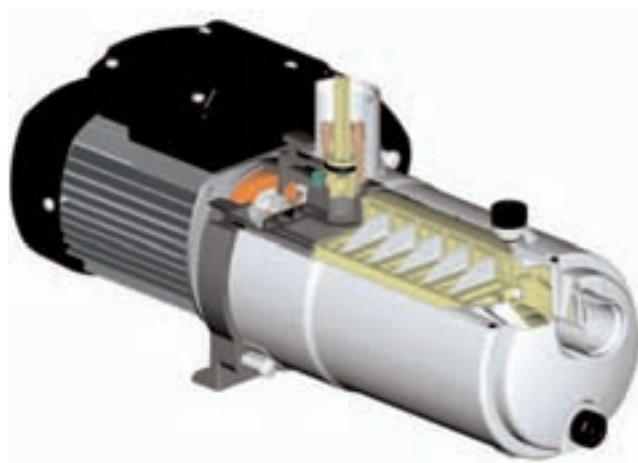

Single phase	Price	230V 50 Hz	kW	HP	l/min m³/h	15	30	45	60	75	90	105	120
Tecnotimer 25 4M	356	1.5	0.92	1.25		44	42	40	37	33	28	22	15