


SPNFN – Horizontally or Vertically Mounted,
Single Stage and Single Suction Volute Casing Pump
卧式/立式安装单级单吸蜗壳泵



Applications:
Condensate transport
Water supply
Cooling water supply
应用范围：
冷凝水输送
供水
冷却水供应

SPNFN – Horizontally or Vertically Mounted,
Single Stage and Single Suction Volute Casing Pump
卧式/立式安装单级单吸蜗壳泵

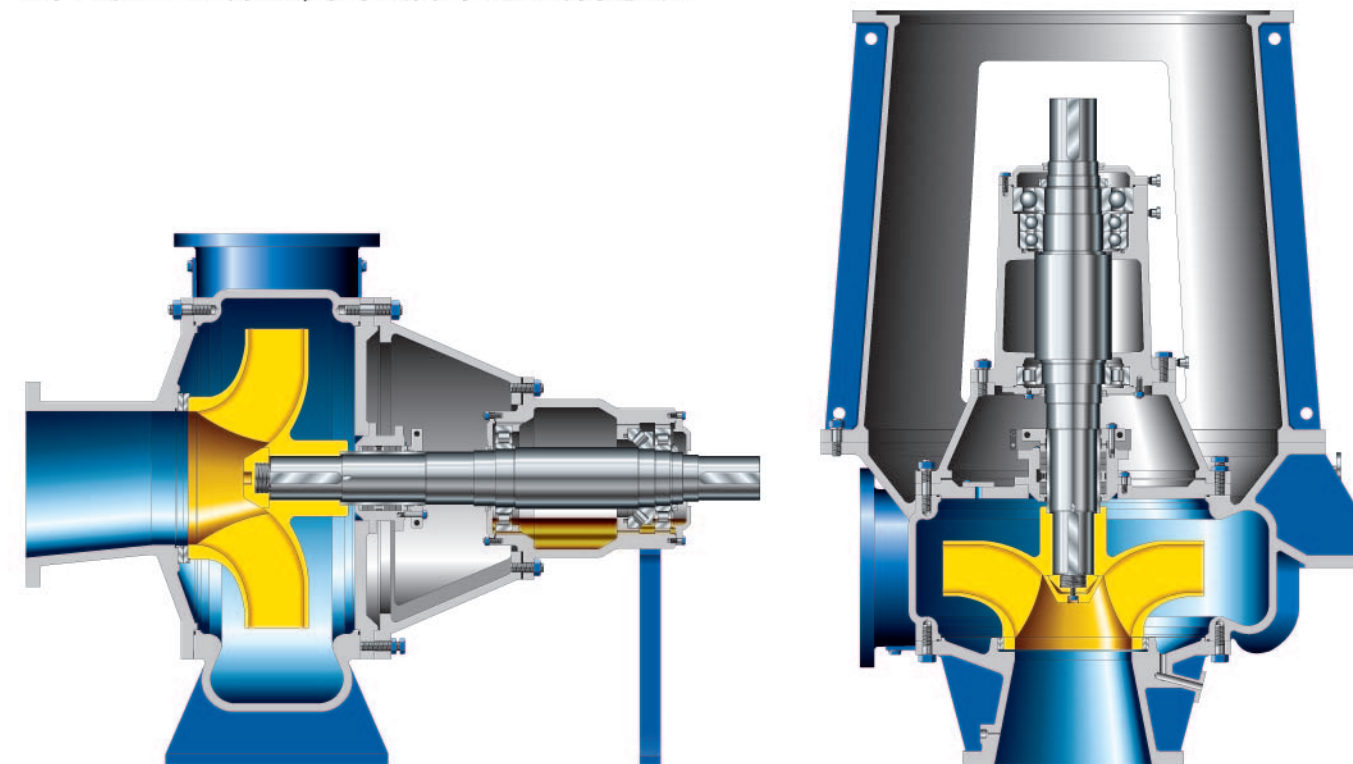

Minimal Maintenance 最小限度维修

- Prelubricated, grease-filled antifriction bearings
- Min. design life: 100,000 hours
- 预加油脂润滑的滚动轴承
- 最小设计寿命: 100,000 小时

Optimal Efficiency 最佳效率

- Maximum efficiency up to 90%
- Non-clog high efficiency impeller: few blade and wide passage for the handling of solid particles

最高效率达到90%
非阻塞式高效叶轮: 叶片数少, 流道宽, 过流粒径大

High Reliability 可靠性高

- Robust design ensure minimum deflection
- Grease or water sealed gland packing or single/double mechanical seal for any application

坚固的设计确保轴的挠度最小
油脂或水封填料密封, 或者单/双机械密封, 适用于所有应用领域

Technical data* 技术数据*

Size 口径	up to DN 1,600
Capacity 流量	up to 28,800 m³/h
Head 扬程	up to 65 m
Operating pressure 工作压力	up to 10 bar
Temperature 温度	up to 70 °C
Speed 转速	up to 1,500 min⁻¹

*Higher ratings on request *有更高的参数满足需求