

### APPLICAZIONI




Elettropompe centrifughe monoblocco con girante in ghisa. Queste macchine sono adatte per il pompaggio di acqua pulita e di altri liquidi chimicamente e meccanicamente non aggressivi. Adatte per le più svariate esigenze in campo civile, agricolo, industriale o impiantistico in generale.

Approvvigionamenti d'acqua, irrigazioni a pioggia o a scorrimento, alimentazioni autoclavi e sopraelevazioni di pressione e in qualsiasi altro impiego che comporta il travaso di liquidi puliti in genere.

### APPLICATION

Centrifugal monoblock with cast iron impeller.

These machines are ideal for pumping clean water and other chemically and mechanically non-aggressive liquids. Used for a wide variety of applications in civil, agricultural, industrial or general plant uses. Water supply, spray or flowing irrigation, autoclave feed, high pressure system and any other general service requiring transfer of clean liquids.

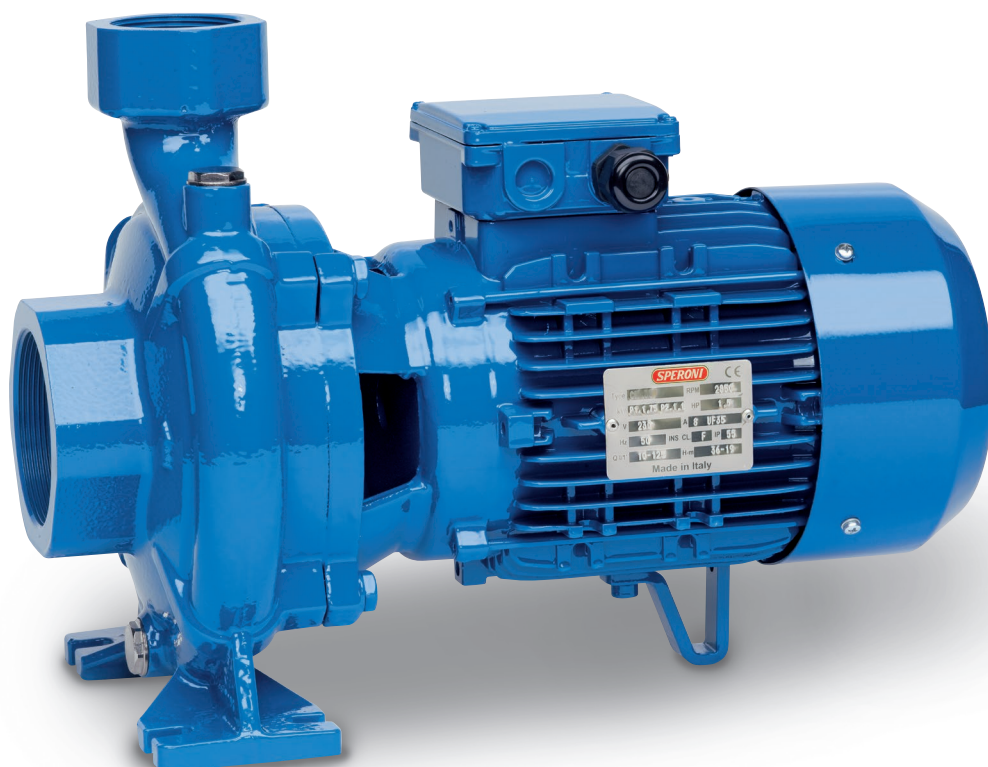

GIRANTE - IMPELLER

### LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C  
(per un uso domestico secondo EN 60335-2-41)  
Temperatura max. liquido: 90°C (per altri impieghi)
- Temperatura ambiente fino a 40° C
- Altezza d'aspirazione manometrica fino a 7 mt.
- Servizio continuo
- Indice di efficienza minimo (BEP) MEI  $\geq 0,4$

### MOTORE

- Monofase 230V-50Hz
- Trifase 230/400V-50Hz
- Motore elettrico ad induzione a 2 poli ( $n = 2850 \text{ min}^{-1}$ )
- Isolamento Classe F
- Protezione IP 55

### MATERIALI

- Corpo pompa Ghisa
- Supporto motore Ghisa
- Girante Ghisa
- Albero motore Acciaio Inox AISI 304
- Tenute meccaniche Ceramica/Grafite/NBR

### OPERATING CONDITIONS


- Liquid temperature up to 35°C  
(for home use according to EN 60335-2-41)  
Max. liquid temperature: 90°C (for other uses)
- Ambient temperature up to 40°C
- Total suction lift up to 7 mt.
- Continuous duty
- Minimum efficiency index (BEP) MEI  $\geq 0,4$

### MOTOR



- Single-phase 230V-50Hz
- Three-phase 230/400V-50Hz
- Two-Pole induction motor ( $n = 2850 \text{ min}^{-1}$ )
- Insulation Class F
- Protection IP 55

### MATERIALS

- Pump body Cast Iron
- Motor Support Cast Iron
- Impeller Cast Iron
- Shaft with rotor Stainless Steel AISI 304
- Mechanical seal Ceramic/Graphite/NBR

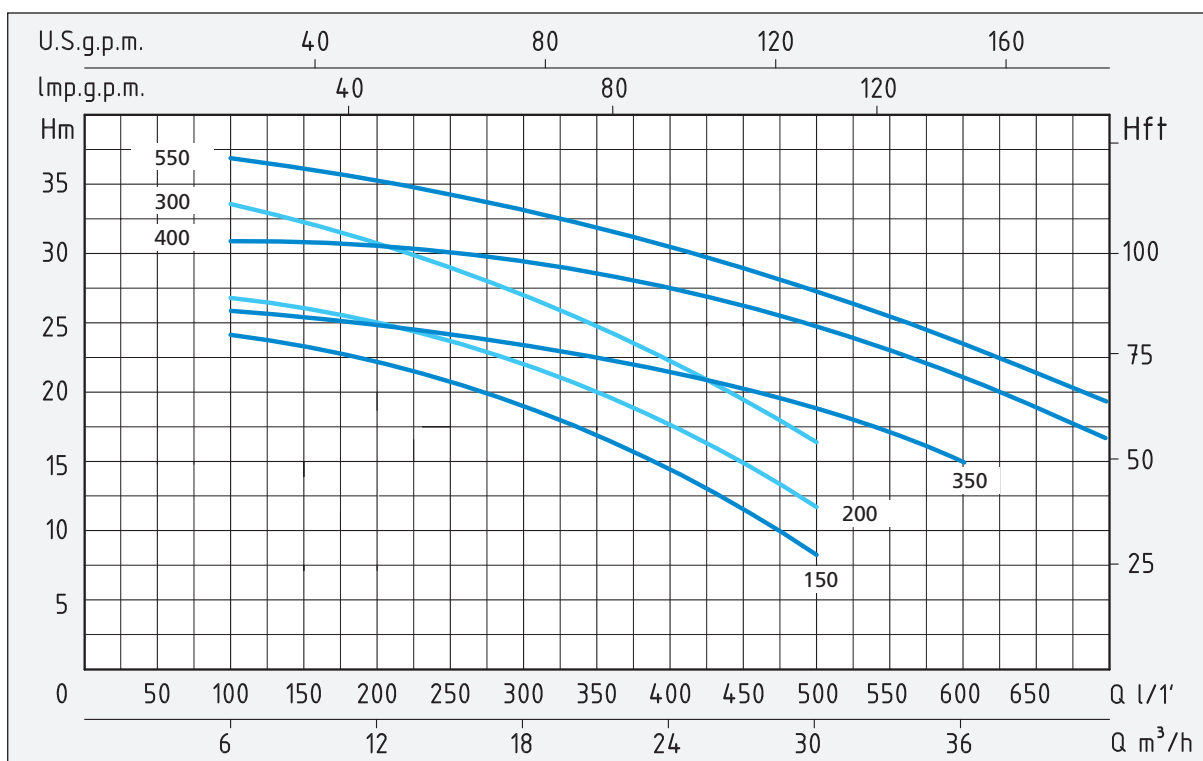

| TIPO<br>TYPE             |                        | POTENZA<br>NOMINALE<br>NOMINAL POWER                                |     | POTENZA<br>ASSORBITA<br>INPUT<br>POWER | AMPERE                   |                        | Q = PORTATA - CAPACITY |      |      |      |      |      |      |      |      |      |      |
|--------------------------|------------------------|---------------------------------------------------------------------|-----|----------------------------------------|--------------------------|------------------------|------------------------|------|------|------|------|------|------|------|------|------|------|
| Monofase<br>Single-phase | Trifase<br>Three-phase | P2                                                                  |     | P1                                     | Monofase<br>Single-phase | Trifase<br>Three-phase | m³/h                   | 6    | 9    | 12   | 18   | 21   | 24   | 27   | 30   | 36   | 42   |
|                          |                        | HP                                                                  | kW  | kW                                     |                          |                        | lt/1'                  | 100  | 150  | 200  | 300  | 350  | 400  | 450  | 500  | 600  | 700  |
|                          |                        | Prevalenza manometrica totale in m.C.A. - Total head in meters w.c. |     |                                        |                          |                        |                        |      |      |      |      |      |      |      |      |      |      |
|                          | CF 150                 | 1,5                                                                 | 1,1 | 2,25                                   |                          | 4,3                    | H<br>(m)               | 24   | 23   | 21,5 | 18,5 | 16,5 | 14,5 | 11,5 | 8,5  |      |      |
| CFM 200                  | CF 200                 | 2                                                                   | 1,5 | 2,7                                    | 12                       | 5,1                    |                        | 27   | 26   | 25   | 21   | 19   | 17   | 14,5 | 12   |      |      |
| CFM 300                  | CF 300                 | 3                                                                   | 2,2 | 3,6                                    | 16                       | 5,9                    |                        | 33,5 | 32,5 | 30,5 | 27   | 25   | 22,5 | 19,5 | 16,5 |      |      |
| CFM 350                  | CF 350                 | 3                                                                   | 2,2 | 3,6                                    | 16                       | 5,9                    |                        | 26   | 25,5 | 25   | 23,5 | 22,5 | 21,5 | 20,5 | 19   | 15   |      |
| CFM 400                  | CF 400                 | 4                                                                   | 3   | 4,5                                    | 20                       | 7,3                    |                        | 31,5 | 31,2 | 31   | 29,5 | 28,5 | 27,5 | 26   | 24,5 | 20,5 | 16,5 |
| CFM 550                  | CF 550                 | 5,5                                                                 | 4   | 5,7                                    | 28                       | 9,3                    |                        | 37   | 36   | 35,5 | 33,5 | 32   | 30,5 | 29   | 27,5 | 24   | 19   |

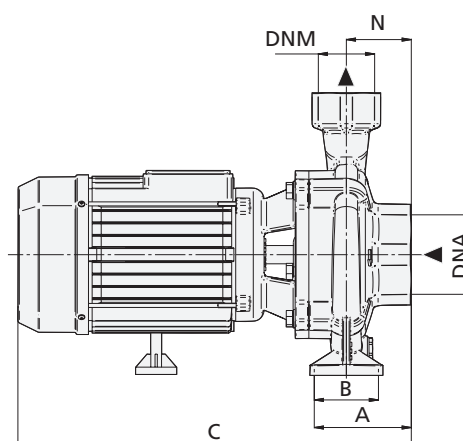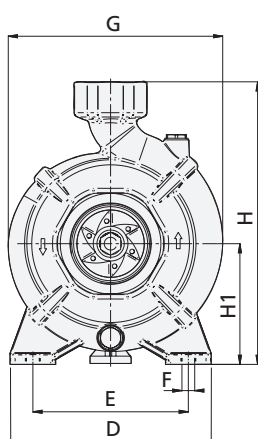

| TIPO<br>TYPE             |                        | DIMENSIONI mm - DIMENSIONS mm |    |     |     |     |    |       |     |     |      |     |     | DIMENSIONI<br>DIMENSIONS<br>mm |     |     | PESO<br>WEIGHT |
|--------------------------|------------------------|-------------------------------|----|-----|-----|-----|----|-------|-----|-----|------|-----|-----|--------------------------------|-----|-----|----------------|
| Monofase<br>Single-phase | Trifase<br>Three-phase | A                             | B  | C   | D   | E   | F  | G     | H   | H1  | N    | DNA | DNM | P                              | L   | H   | Kg             |
|                          |                        |                               |    |     |     |     |    |       |     |     |      |     |     |                                |     |     |                |
|                          | CF 150                 | 96                            | 55 | 394 | 210 | 165 | 14 | 220   | 286 | 119 | 68,5 | 2"  | 2"  | 259                            | 507 | 345 | 23,7           |
| CFM 200                  | CF 200                 | 96                            | 55 | 394 | 210 | 165 | 14 | 220   | 286 | 119 | 68,5 | 2"  | 2"  | 259                            | 507 | 345 | 27,6           |
| CFM 300                  | CF 300                 | 96                            | 55 | 430 | 210 | 165 | 14 | 220   | 286 | 119 | 68,5 | 2"  | 2"  | 259                            | 507 | 345 | 31             |
| CFM 350                  | CF 350                 | 98,5                          | 55 | 430 | 220 | 170 | 14 | 237,5 | 309 | 132 | 71   | 3"  | 2"  | 282                            | 490 | 365 | 31,6           |
| CFM 400                  | CF 400                 | 98,5                          | 55 | 496 | 220 | 170 | 14 | 237,5 | 309 | 132 | 71   | 3"  | 2"  | 269                            | 540 | 421 | 43,3           |
| CFM 550                  | CF 550                 | 98,5                          | 55 | 496 | 220 | 170 | 14 | 237,5 | 309 | 132 | 71   | 3"  | 2"  | 269                            | 540 | 421 | 46,6           |