

APPLICAZIONI

Motopompa autoadescante portatile, particolarmente adatta per l'approvvigionamento e la distribuzione di acque pulite e chiare in agricoltura e in giardino dove non è possibile un collegamento elettrico.

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C
(per un uso domestico secondo EN 60335-2-41)
Temperatura max. liquido: 35°C (per altri impieghi)
- Temperatura ambiente fino a 40°C

MOTORE

- Giri/min 3600
- Avviamento manuale
- Capacità serbatoio 3,6 lt

MATERIALI

- | | |
|---------------------|-------------------------|
| - Corpo pompa | Alluminio |
| - Supporto motore | Alluminio |
| - Girante | Ghisa |
| - Tenute meccaniche | Ceramica
Grafite/NBR |

OPERATING CONDITIONS

- Liquid temperature up to 35°C
(for home use according to EN 60335-2-41)
Max. liquid temperature: 35°C (for other uses)
- Ambient temperature up to 40°C

MOTOR

- r.p.m. 3600
- Start system recoil
- Tank capacity 3,6 lt

MATERIALS


- | | |
|-------------------|-------------------------|
| - Pump body | Aluminium |
| - Motor Support | Aluminium |
| - Impeller | Cast Iron |
| - Mechanical seal | Ceramic
Graphite/NBR |



APPLICATION

Selfpriming hand-carry motor pump.

Particularly suitable to supply and distribute clean water for agricultural and gardening purposes, when an electrical connection is not possible.

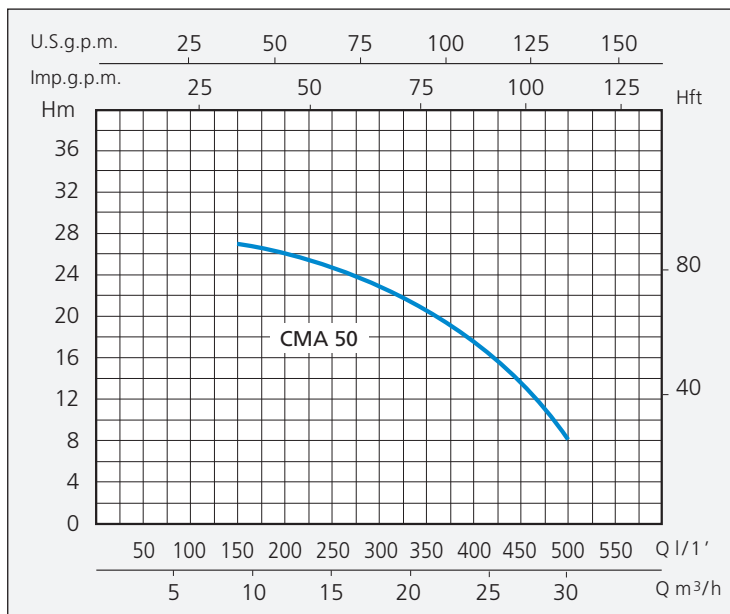

TIPO TYPE	Aspirazione mandata Suction delivery	Giri/min r.p.m.	Portata max. Delivery max. (l/1')	Prevalenza max. Head max. (m)	Altezza aspirazione Suction depth (m)	Potenza motore Motor power (hp)	Capacità serbatoio Tank Capacity (lt)	Avviamento Start system	Dimensioni Dimensions (mm)	Peso Weight (Kg)
CMA 50	50 (2")	3600	550	32	7	6,5	3,6	manuale recoil	440 x 559 x 420	26,3