

Fiche produit Motralec Ziehl Abegg Fe2Owlet Ecblue With Zaplus ZN063 - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10

FE2owlet-ECblue with ZApus

for three phase alternating current, 380-480 V

ZN063



Description

Motor technology: EC
 Rated voltage U_N : 3~ 380-480 V*
 Rated frequency f_N : 50/60 Hz*
 Input power P_{sys} : 3.70 kW*
 Rated current I_N : 6.00- 4.70 A*
 Rated speed n_N : 1600 min⁻¹*
 Thermal class: THCL155*
 Min. permitted ambient temperature $t_{R(min)}$: -35 °C ***
 Max. permitted ambient temperature $t_{R(max)}$: 55 °C
 Electrical connection: Integrated controller
 Number of blades: 7
 Degree of protection : IP55
 Motor protection: Integrated active temperature management
 Blades: Aluminium, powder-coated, ultramarine blue
 Rotor: Aluminium, 2 coat paint, ultramarine blue
 Conformity: ErP 2015, CE, UL

ErP-data


Efficiency η_{data} : 52.9 %
 Efficiency: $\eta_{actual} = 55.7 / N_{target} = 40$ **
 EC controller integrated

* Rated data

**ErP 2015

*** Continuous operation with occasional starts (S1) according to DIN EN 60034-1:2011-02. Occasional starting between -35 °C and -25 °C is permissible. Continuous operation below -25 °C only with special bearings for refrigeration applications on request.

Characteristic curve

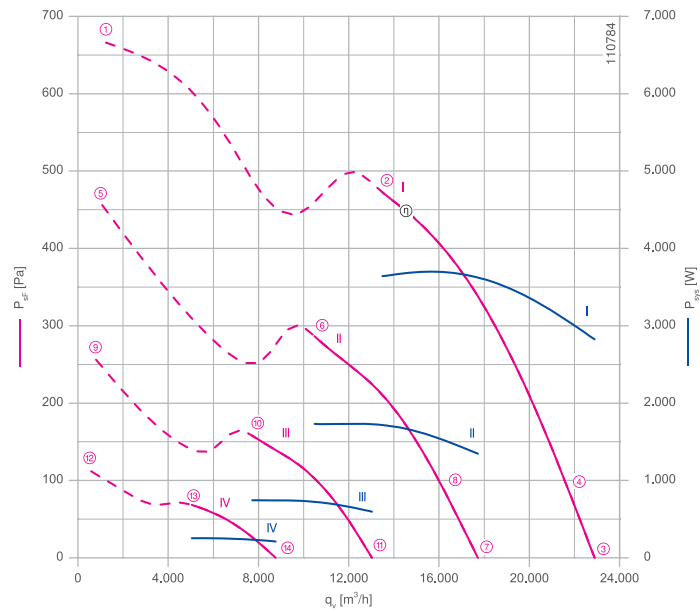

Measured in ZApus without guard grille in installation type A according to ISO 5801.


Connection diagram Page 172
1360-403

System components Page 110


Dimensions mm

Airflow direction →

Design L - ZApus Ontop, guard grille suction side

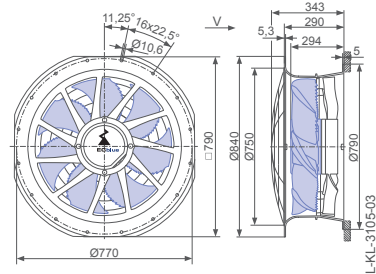


Design Q - ZApus with adapter plate, guard grille suction side

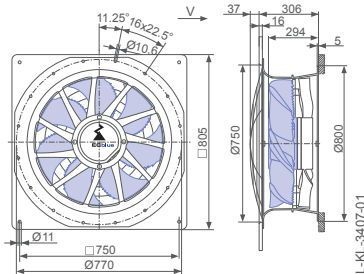

← Airflow direction

Design L - ZApus Ontop without guard grille

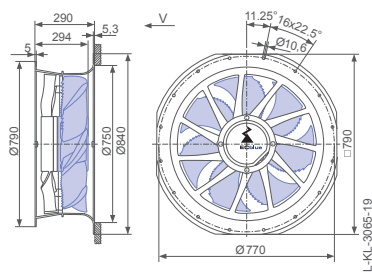

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current	Input power	Acoustic pressure level 7m	Specific power
				I A	P _{sys} W	L _{pA} dB(A)	P _{spez} Wh/1000m ³
ZN063-ZI_GL.V7P3	I	1600	①	5.60	3700		
			②	5.60	3600		273.2
			③	4.40	2800	65	123.4
			④	4.80	3100	64	143.4
	II	1250	⑤	3.20	2100		
			⑥	2.70	1700		166.6
			⑦	2.10	1350	59	76.0
			⑧	2.40	1550	58	96.8
	III	930	⑨	1.50	920		
			⑩	1.25	740		96.5
			⑪	1.05	600	53	45.8
			⑫	0.66	300		
	IV	620	⑬	0.58	250		
			⑭	0.52	210	42	24.1

Current values determined at 400V

Fan ordering information

Design	Airflow direction			Airflow direction		
	L (guard grille suction side) Ontop	Q (guard grille suction side)	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side)
Type	ZN063-ZIL.GL.V7P3	ZN063-ZIQ.GL.V7P3	ZN063-ZIL.GL.V7P3	ZN063-ZIL.GL.V7P3	ZN063-ZIQ.GL.V7P3	ZN063-ZIQ.GL.V7P3
Article no.	169049	169050	168049	168050	168051	168052
Weight kg	37.10	39.20	35.20	36.20	37.20	38.20

ZAplus attachable on both sides.

Control technology

Control module UNIcon Zenec switch




Page 130




Page 158


Design L - ZAplus Ontop, guard grille pressure side

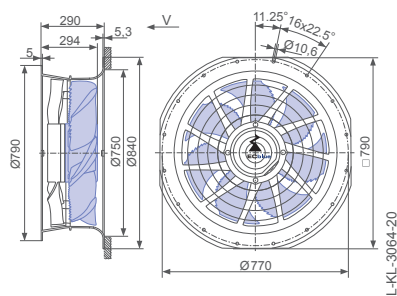

Design Q - ZAplus with adapter plate, without guard grille

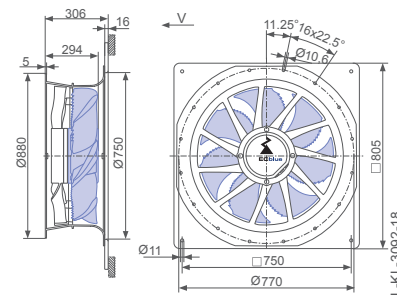

Design Q - ZAplus with adapter plate, guard grille pressure side

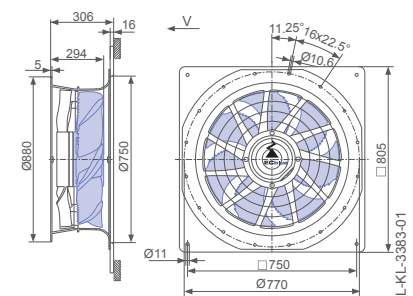

www.ziehl-abegg.com

Fiche produit Motralec Ziehl Abegg Fe2Owlet Ecblue With Zaplus ZN063 - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

Besoin d'un prix ou d'un conseil technique ?

Ventilateur Ziehl Abegg FE2OWLET ECBLUE WITH ZAPLUS ZN063



4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

Voir la gamme Ziehl Abegg sur notre site :

www.motralec.com/.../ziehl-abegg

DEMANDER UN PRIX >