

Fiche produit Motralec Ziehl Abegg Fe2Owlet Ecblue With Zaplus ZN100 ZI 1 - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE : <https://www.motralec.com/demandeContact>**

Oil transformer cooling
Size 1000

Addendum fans for transformer cooling
02/2020

FE2owlet-ECblue with ZApus

for three phase alternating current, 380-480 V

ZN100




Description

- Motor technology: EC
- Rated voltage U_N : 3~ 380-480 V*
- Rated frequency f_N : 50/60 Hz*
- Input power P_{ed} : 3.40 kW*
- Rated current I_N : 5.40- 4.20 A*
- Rated speed n_N : 940 rpm^{1*}
- Speed n at $p_{ts} = 0$ Pa: 940 min^{1*}
- Power input P_{ed} at $p_{ts} = 0$ Pa: 2200 W*
- Air flow q_{v1} at $p_{ts} = 0$ Pa: 10.9 m³/s*
- Thermal class: THCL155*
- Min. permitted ambient temperature $t_{amb(min)}$: -35 °C***
- Max. permitted ambient temperature $t_{amb(max)}$: 40 °C
- Electrical connection: Integrated controller
- Number of blades: 5
- Degree of protection : IP54
- Motor protection: integrated active temperaturemanagement
- Blades: Aluminium, powder-coated, RAL 9005 (jet black)
- Rotor: Aluminium, 1 coat paint, RAL 5002 (ultramarine blue)
- Conformity: ErP 2015, CE, UL

ErP-data

- Efficiency η_{statA} : 57.0 %
- Efficiency grade: $N_{actual} = 60.1 / N_{target} = 40^{**}$
- * Rated data
- **ErP 2015

Characteristic curve

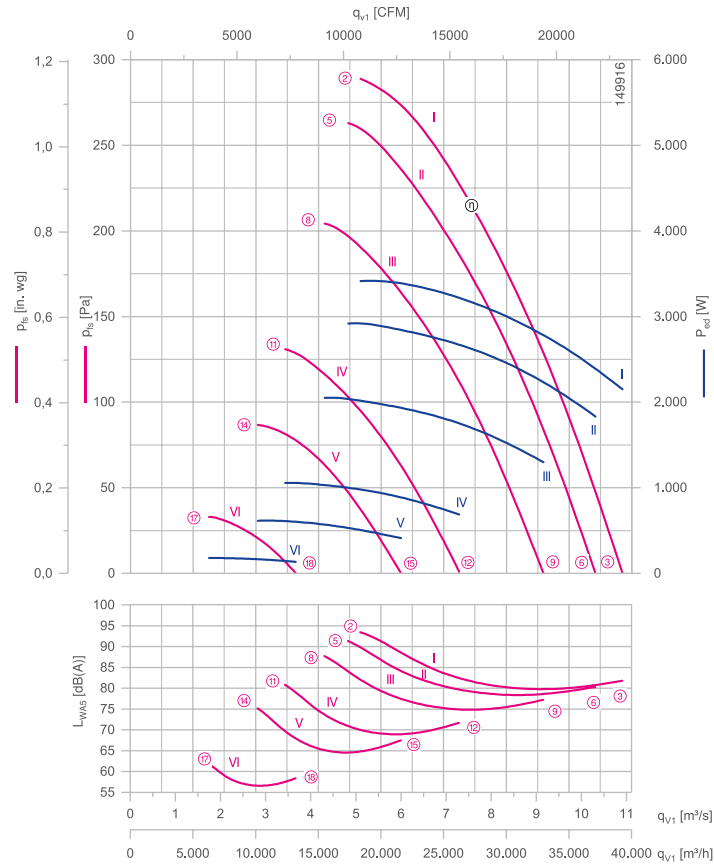

Measured in ZApus and guard grille on suction side in installation type A according to ISO 5801.

*** Continuous operation with occasional starts (S1) according to DIN EN 60034-1:2011-02. Occasional starting between -35 °C and -25 °C is permissible. Continuous operation below -25 °C only with special bearings for refrigeration applications on request.


Connection diagram

1360-390 KLK


Dimensions mm

Air flow direction

Design L - ZApus, guard grille suction side with connection box

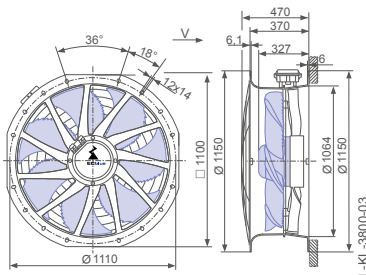

Design L - ZApus, guard grille two-sided with connection box

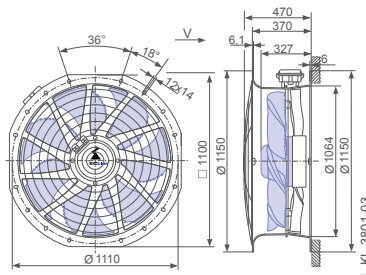



Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{ad} W	L _{WAS} dB(A)	t _{amb (max.)} °C
ZN100-ZI_GQ_5P1	I	940	②	5.00	3400	94	40
			③	3.20	2200	82	
	II	890	⑤	4.40	2900	91	50
			⑥	2.80	1850	80	
	III	790	⑧	3.10	2000	88	60
			⑨	2.00	1300	77	
	IV	630	⑪	1.65	1050	81	70
			⑫	1.15	680	72	
	V	520	⑭	1.05	620	75	70
			⑮	0.80	420	68	
	VI	320	⑰	0.48	180	62	70
			⑱	0.42	130	58	

Current values determined at 400V

Fan ordering information

Air flow direction

Design L (guard grille suction side) L (guard grille two-sided)



Type ZN100-ZIL.GQ.V5P1 ZN100-ZIL.GQ.V5P1
Article no. 180352/10C4 180352/10C6

Weight kg 56.40 59.20
 ZAplus attachable on both sides.

Control technology

Control modules

Add-on modules

Operating terminal



www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10

Fiche produit Motralec Ziehl Abegg Fe2Owlet Ecblue With Zaplus ZN100 ZI 1 - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

Besoin d'un prix ou d'un conseil technique ?

Ventilateur Ziehl Abegg FE2OWLET ECBLUE WITH ZAPLUS ZN100 ZI 1



4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

Voir la gamme Ziehl Abegg sur notre site :

www.motralec.com/.../ziehl-abegg

DEMANDER UN PRIX >