

Fiche produit Motralec Ziehl Abegg Maxventowlet DN71V - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE : <https://www.motralec.com/demandeContact>**

MAXventowlet, AC-Technology

Medium Pressure Axial Fans North America

www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10

MAXventowlet

for three phase alternating current, 4 pole



DN71V



Description

- Rated voltage U_N : 3-460 V*
- Rated frequency f_N : 60 Hz*
- Min. permitted ambient temperature $t_{amb(min)}$: -4 °F / -20 °C
- Max. permitted ambient temperature $t_{amb(max)}$: 122 °F / 50 °C
- Number of blades: 9
- Degree of protection : TEFC
- Blade: ZAmid, Impeller unpainted, Blue
- Motor: Standard motor NEMA
- * Rated data
- Other versions on request.


Characteristic curve

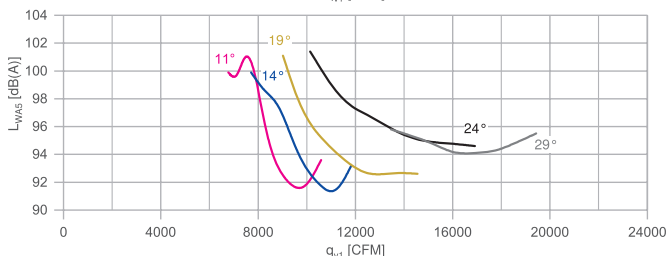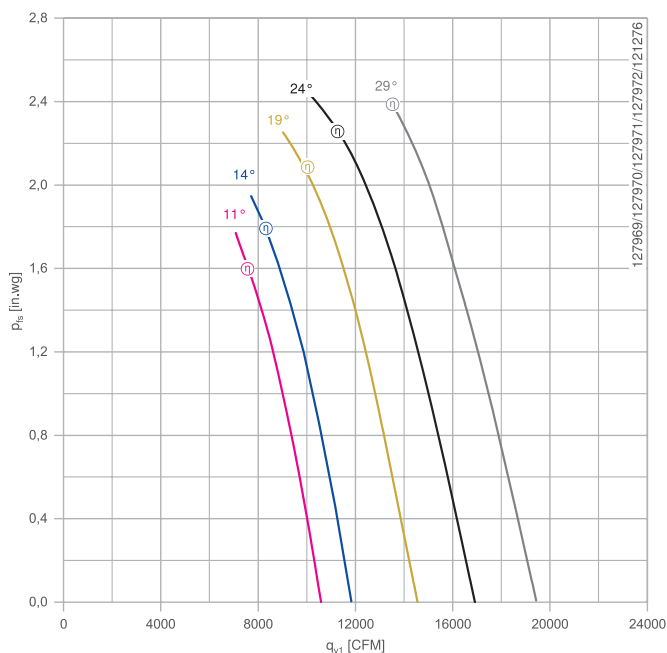


Measured in long casing with inlet bell mouth without guard grille in installation type A air flow impeller/ motor according to ISO 5801

Dimensions inch


Design F
Long casing

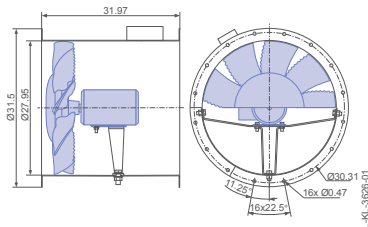

Design K
Short casing (on request)



Design S - Short casing
with integrated inlet nozzle (on request)



Technical data


Type	Blade setting	Rated power hp	Motor size	Motor technology	Design F Weight lbs	Efficiency	
						η_{statA} %	N_{actual} %
DN71V-4DF.F7.11.G9	11	5	184T	PEM	218.7	47.2	50.4
DN71V-4DF.F7.14.G9	14	5	184T	PEM	218.7	47.9	50.6
DN71V-4DF.G7.19.G9	19	7.5	213T	PEM	285.3	47.1	48.9
DN71V-4DF.H7.24.G9	24	10	215T	PEM	254.2	46.0	47.1
DN71V-4DF.H7.29.G9	29	10	215T	PEM	296.4	43.9	44.3



Description

Rated voltage U_N : 3-460 V*
 Rated frequency f_N : 60 Hz*
 Min. permitted ambient temperature $t_{amb(min)}$: -4 °F / -20 °C
 Max. permitted ambient temperature $t_{amb(max)}$: 122 °F / 50 °C
 Number of blades: 9
 Degree of protection : TEFC
 Blade: High Performance Composite Material, Impeller unpainted, black
 Motor: Standard motor NEMA
 * Rated data
 Other versions on request.


Characteristic curve

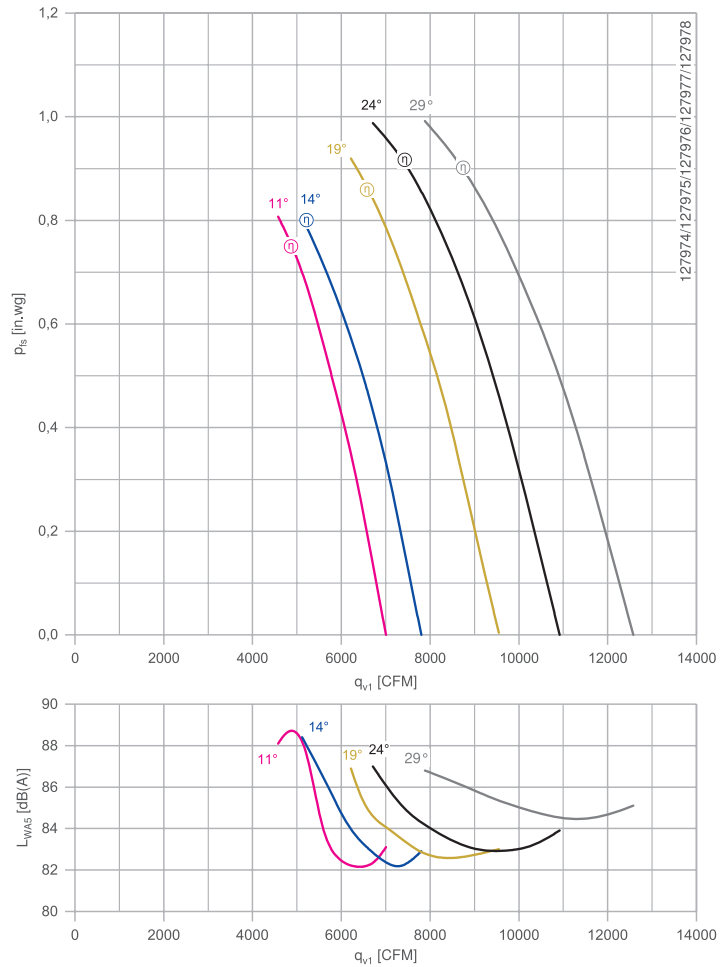


Measured in long casing with inlet bell mouth without guard grille in installation type A air flow impeller/ motor according to ISO 5801

Dimensions inch


Design F
 Long casing

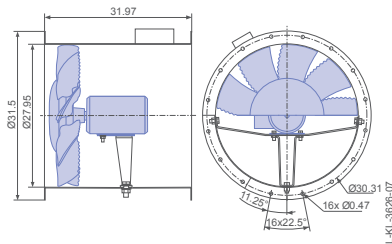

Design K
 Short casing (on request)



Design S - Short casing
 with integrated inlet nozzle (on request)



Technical data

Type	Blade setting °	Rated power hp	Motor size	Motor technology	Design F Weight lbs	Efficiency	
						η_{statA} %	N_{actual} %
DN71V-6DF.E7.11.G9	11	1.5	182T	PEM	158.1	50.0	56.7
DN71V-6DF.E7.14.G9	14	1.5	182T	PEM	158.1	48.1	54.3
DN71V-6DF.F7.19.G9	19	2	184T	PEM	218.7	44.9	50.0
DN71V-6DF.G7.24.G9	24	3	213T	PEM	268.3	44.1	48.7
DN71V-6DF.G7.29.G9	29	3	213T	PEM	268.3	36.0	39.7

Besoin d'un prix ou d'un conseil technique ?

Ventilateur Ziehl Abegg MAXVENTOWLET DN71V



4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

Voir la gamme Ziehl Abegg sur notre site :

www.motralec.com/.../ziehl-abegg

DEMANDER UN PRIX >