


SP33D SP50DX

Product Features for Superior Performance

- Diaphragm switch for dependable activation
- Corrosion-resistant stainless steel shaft and hardware
- Silicon carbide mechanical seal for grit resistance
- Upper and lower oil-lubricated ball bearings for maximum life
- Vortex impeller for optimum life handling up to 1/2" solids
- "Industrial" style motor draws half the amperage of most other sump pumps
- Higher flow rates than most other sump pumps
- Switch Activation On: 13" above sump floor;
Off: 4" above sump floor

Barnes SP33D and SP50DX sump pumps feature high performance benefits from a rugged, heavy-duty design. The SP is a robust design, built for long operational life and dependable service.

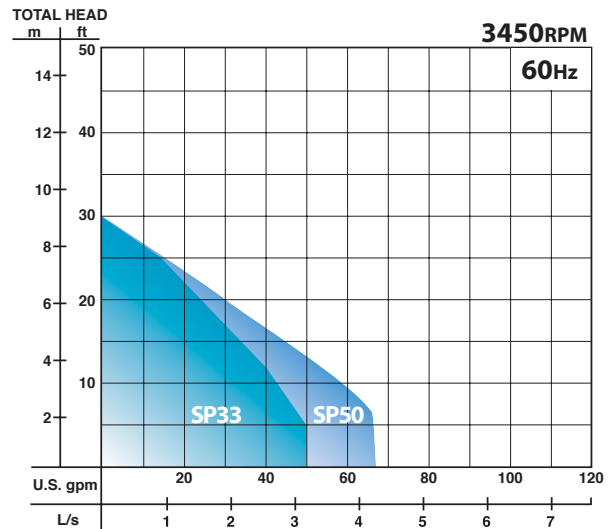

SP33D/SP50DX

Model	SP33D	SP50DX
Motor	1/3hp	1/2hp
RPM	3450	3450
Electrical	120v 1ph	120v 1ph
Cord Length	10'	20'
Construction	cast iron	cast iron
Impeller	cast iron vortex	cast iron vortex
Discharge	1.5"	1.5"
Solids	.5"	.5"
Automatic Operation	Diaphragm switch with piggy-back cord	Diaphragm switch with piggy-back cord



motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / e-mail : service-commercial@motralec.com
www.motralec.com