

Small 3 speed circulators for heating systems.



**SPECIFICATIONS**

- Maximum working pressure: 10 bar
- Maximum liquid temperature: 110°C
- Maximum ambient temperature: 55°C
- Maximum circulator surface temperature: 125°C

**MATERIALS**

- Pump casing in cast iron
- Shaft in chrome coated steel
- Impeller in tecnopolymer
- Can in stainless steel

**TECHNICAL DATA**


- 3 speed motor with regulator on the terminal box
- Insulation class H
- 1~230V 50Hz

Available in the following versions:


- mm.130 with 1" and 1 1/2" pipe male connection with 2 gaskets
- mm.180 with 1 1/2" and 2" pipe male connection with 2 gaskets
- mm.120 flanged, with 2 gaskets and bolts

**PERFORMANCE CURVES** (according to ISO 9906 Annex A)

**MR 43**

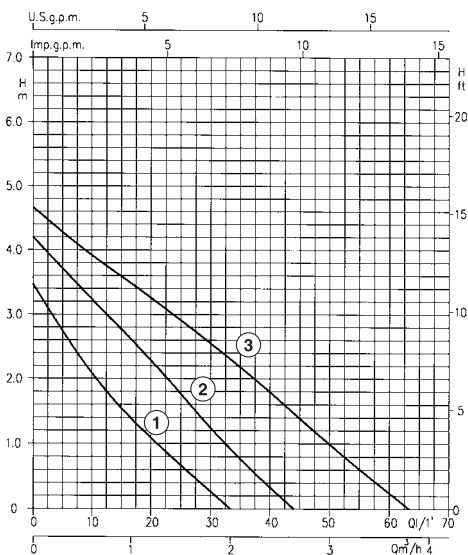

**MR 53**

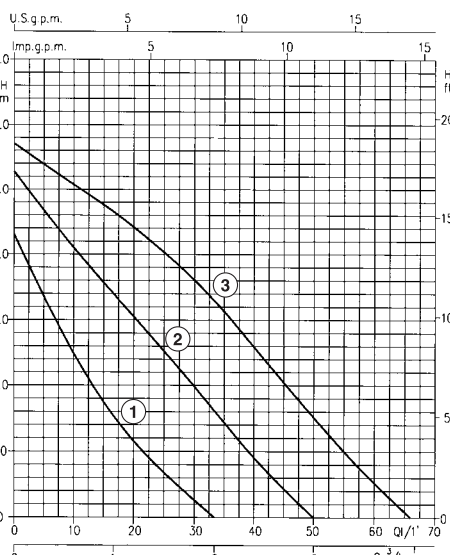

**MR 63**

