

ATP-Series Air Pump

▼ Shown: ATP-1500



ATP Series

Reservoir Capacity:
3.8 liters

Flow at Rated Pressure:
.06 l/min.



Maximum Operating Pressure:
1500 bar

- General purpose, high pressure air driven pump unit for products requiring up to 1500 bar hydraulic pressure
- Compact, lightweight, rugged steel frame for protection and easy handling
- Prelubricated pump element, does not require an airline lubricator
- Easily adjustable output pressure control
- Integrated and protected easy to read glycerin filled gauge
- Safety relief valve limits output pressure



These products operate at ultra-high pressure, use only the specified fittings and hoses designed for these pressures.

Page: **43**

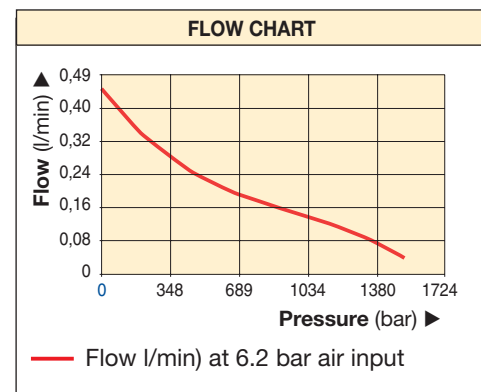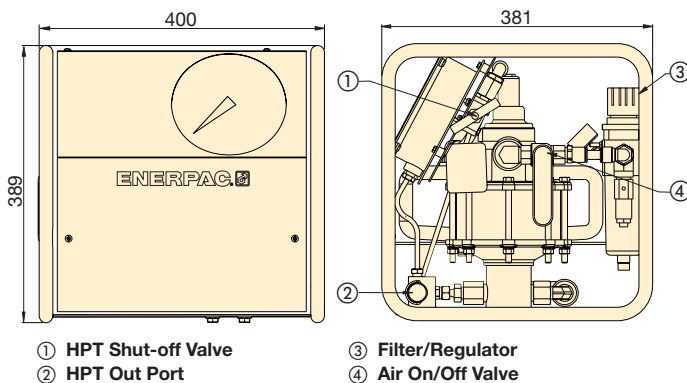

Pump Type	Useable Oil Capacity (l)	Model Number	Pressure Rating (bar)	Output Flow Rate at 0 psi (l/min)	Output Flow Rate at 21,750 psi (l/min)	Air Pressure Range (bar)	Air Consumption	Sound Level (dBA)	Weight (kg)
High pressure	3,8	ATP-1500	1500	0,43	0,07	5.5-6.2	113	70	31,7