

# Tecnotimer

Programmable stainless steel pumps for irrigation



## Applications

Supply of water at pressure and programmed sprinklers irrigation per areas.

## Materials

### Pump Body

Stainless steel. AISI 304.

### Impellers

Stainless steel. AISI 304.

### Diffusers

Glass loaded Noryl.

### Motor Shaft

Stainless steel. AISI 304

### Mechanical Seal

Graphite and steatite.

## Motor

Class F insulation.  
IP 55 Protection.  
Continuous operation.  
Built-in thermal protection.


## Limitations

Maximum suction lift: 9 m.  
Maximum temperature of liquid: 35°C.


**+** *Dry running protection*

**+** *Self priming device  
9m Suction*

**+** *4 outlets for programmed  
irrigation*

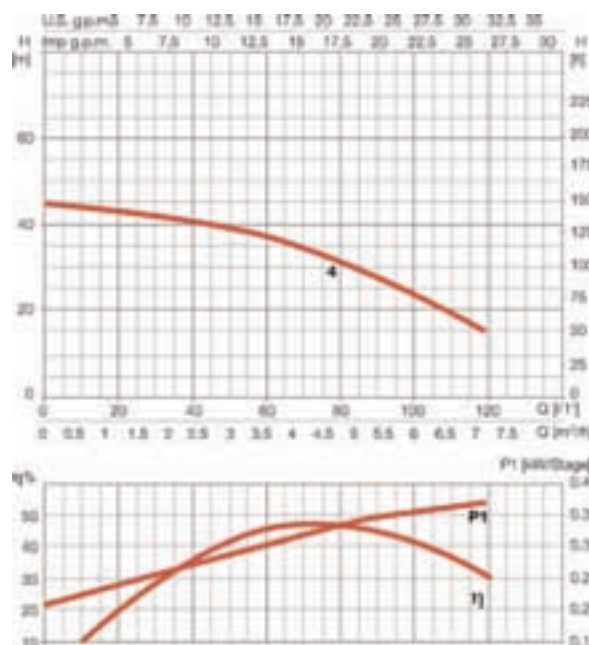


	A	B	C	D	E	F	G	H	I	J	K	Kg
	236.6	107.5	298.1	267	190.5	148.5	196.3	88	9	1"	1 1/4"	12.7

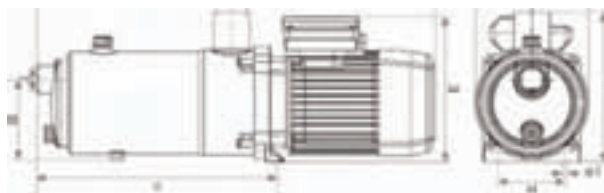


Programmable stainless steel pumps for irrigation

# Tecnotimer

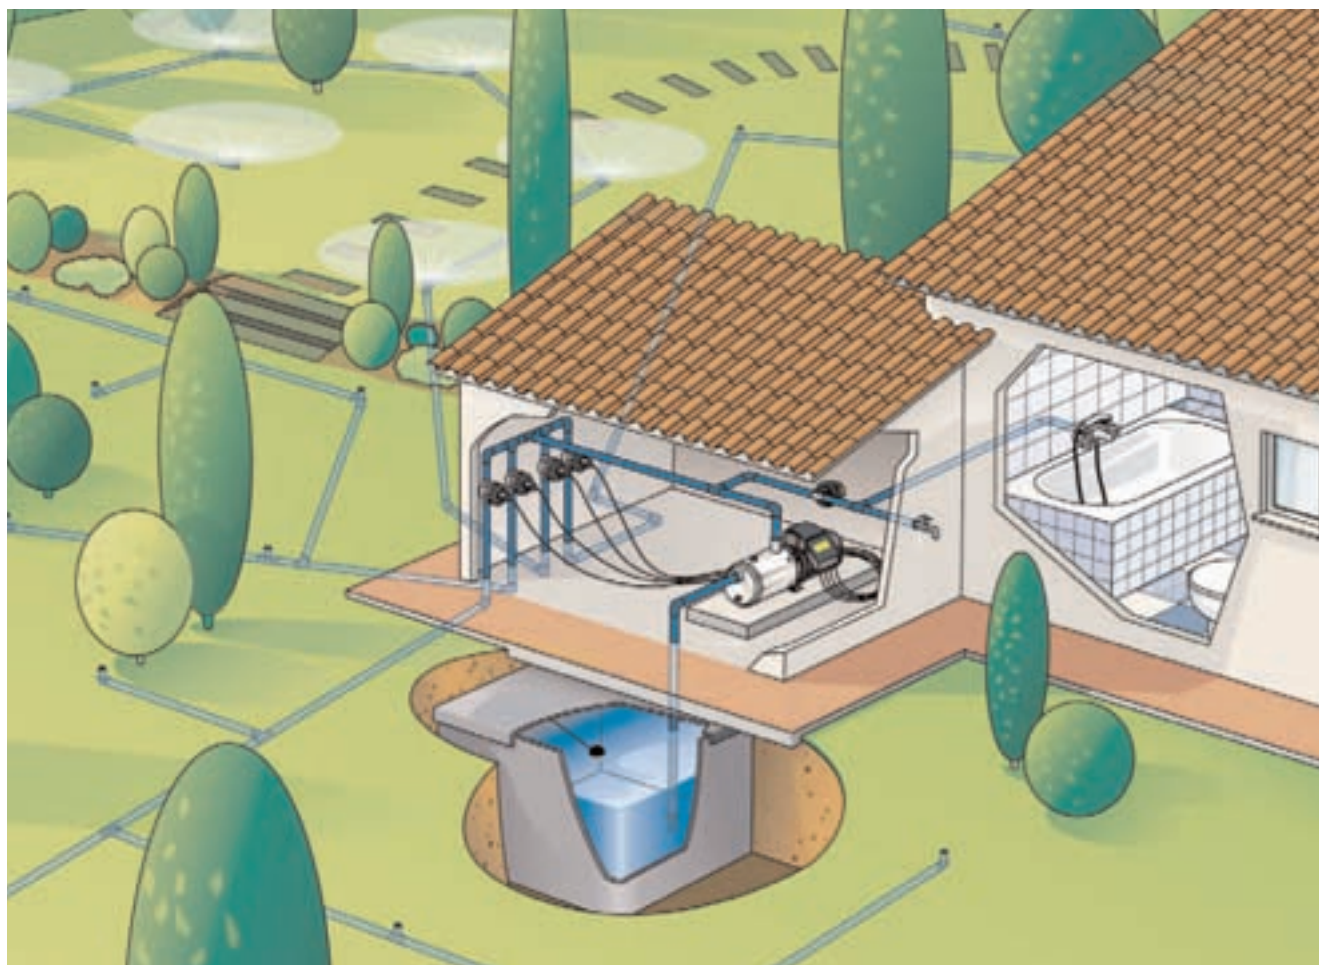

Surface

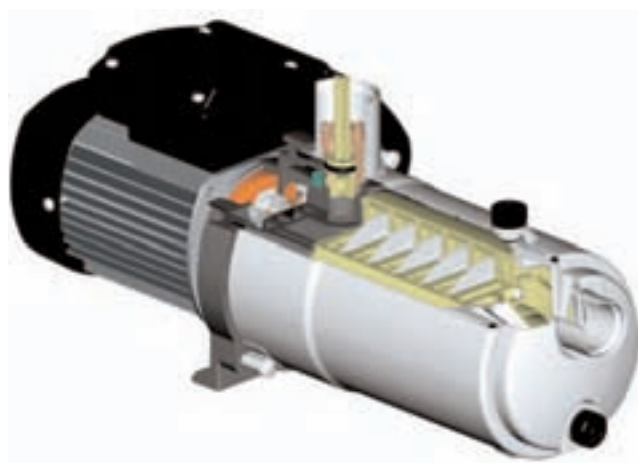

Single phase	Price	230V 50 Hz	kW	HP	l/min m <sup>3</sup> /h	15	30	45	60	75	90	105	120
						0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2
<b>Tecnotimer 25 4M</b>	<b>356</b>	1.5	0.92	1.25		44	42	40	37	33	28	22	15