


**PERFORMANCE:**

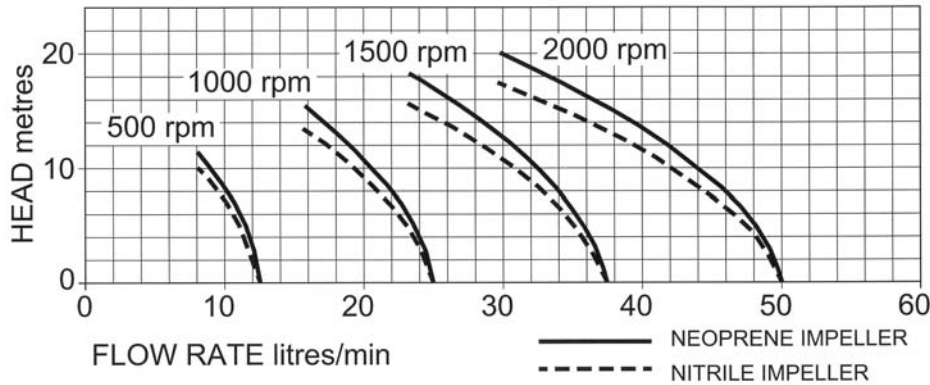


MODEL	Maximum flow rate		Maximum head	
	l/min	gall/min	metres	feet
10550-200	50	11	20	65
10550-212	50	11	17	55

Max Power absorbed 550 watt at 2000rpm

**DIMENSIONS:**

**WEIGHT: 3 Kg**

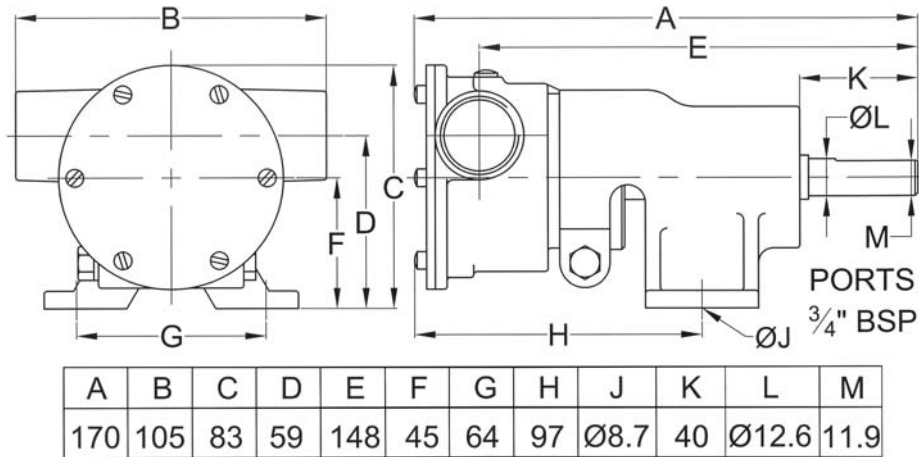

**MATERIALS OF CONSTRUCTION:**

<b>Body</b>	Bronze, Cast iron bearing housing
<b>Impeller</b>	Neoprene or Nitrile
<b>Wearplate</b>	Replaceable
<b>Shaft</b>	Stainless steel type 316
<b>Shaft seal</b>	Lip type
<b>Bearings</b>	Twin single row, ball type
<b>Port type</b>	3/4" BSP to BS21 (DIN2999)


**MODELS:**

- 10550-200 *Standard Neoprene Impeller*
- 10550-212 *Oil resistant Nitrile*
- 10550-237 *High pressure Neoprene*



**BRONZE FLEXIBLE IMPELLER PEDESTAL PUMP**

**10550 SERIES**

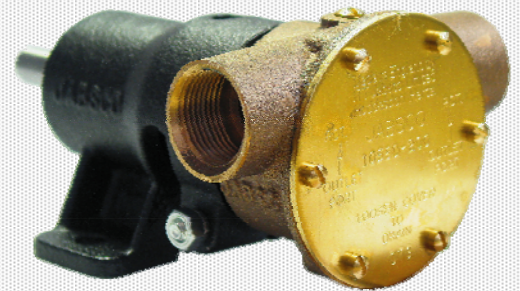

**PUMP with 3/4" BSP PORTS**

- ◆ Constructed from marine quality bronze and stainless steel
- ◆ Self-prime from dry up to 2.4m
- ◆ Easy to service and maintain
- ◆ Will tolerate abrasive wear
- ◆ Handles hard and soft solids without clogging
- ◆ Can pump in either direction
- ◆ Will not airlock