



ITT

General Catalogue

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / E-mail : service-commercial@motralec.com
www.motralec.com

Lowara

Q3A Series

Three-phase electric panels for the protection and control of a 4" three-phase surface or submersible pump.

SPECIFICATIONS

Manual control through A-0-M switch
Automatic control through an external contactor

Supply voltage: 3 x 400 V \pm 10%

Frequency: 50/60 Hz

Low voltage auxiliary circuit 24 Vac

Power: 4 to 315 kW

Autotransformer starting

Overload protection

Protection: IP54

Ambient temperature: -5 to +40 °C

(limit specified by EN standard 60439-1)

Maximum relative humidity: 50% at +40

°C provided that no condensation occurs

(limit specified by EN standard 60439-1)

Wall mounted

Metal enclosure

Power - pump running - thermal overload

- dry running indicator lights

Ready for installation of dry-running

control with float or pressure switch

(available separately)

Electronic protection module with

electrodes can be fitted

OPTIONAL ACCESSORIES

- SLD series 24V level kit : Probe module for protection against dry running (set of three electrodes included in the supply)
- Float switch
- Pressure switch
- VR3/SCA3 three-phase module for overvoltage protection (lightning protector)




For proper electric panel-electric pump selection, make sure that the Ampere input of the motor falls within the rated current range shown in the table.

Engineered for life



General Catalogue

Q3A SERIES

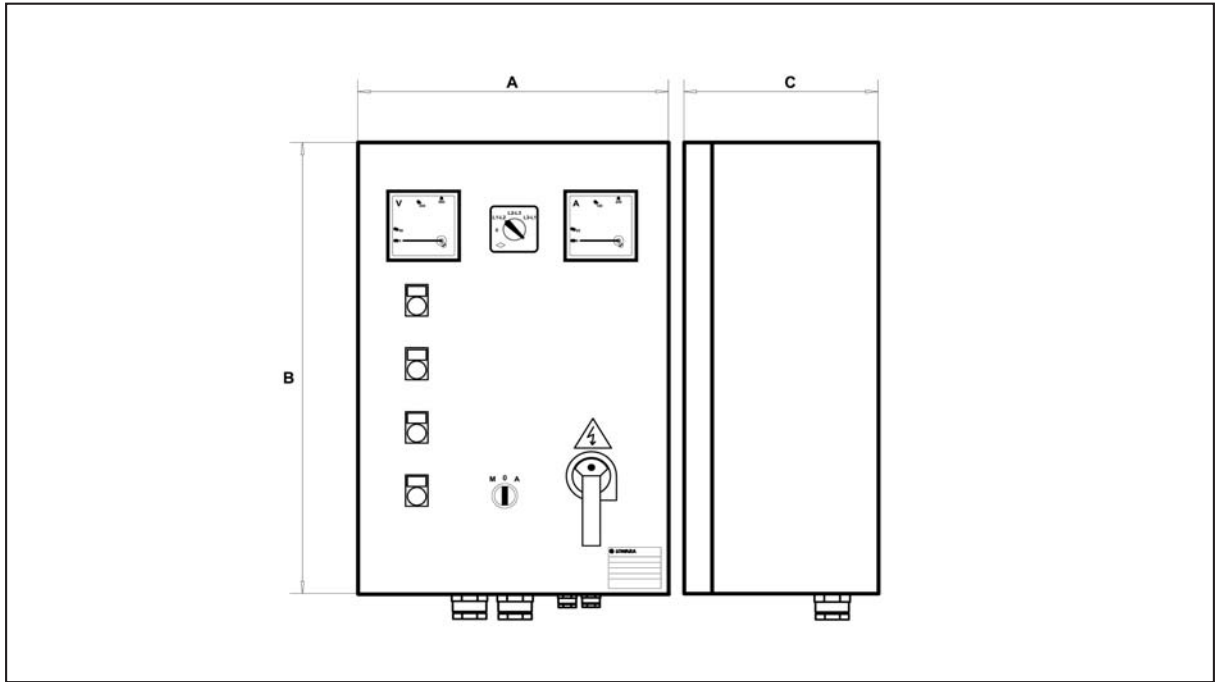

PANEL TYPE	RATED VOLTAGE V	RATED POWER		RATED CURRENT A	DIMENSIONS			WEIGHT Kg
		kW	HP		A mm	B mm	C mm	
Q3A/40-75	3 x 400 V ± 10 %	4-7,5	5,5-10	10 ÷ 16	500	700	250	50
Q3A/75-92	3 x 400 V ± 10 %	7,5-9,2	10-12,5	16 ÷ 20	500	700	250	50
Q3A/92-110	3 x 400 V ± 10 %	9,2-11	12,5-15	20 ÷ 25	500	700	250	50
Q3A/110-150	3 x 400 V ± 10 %	11-15	15-20	22 ÷ 32	500	700	250	50
Q3A/150-185	3 x 400 V ± 10 %	15-18,5	20-25	28 ÷ 40	500	700	250	50
Q3A/185-220	3 x 400 V ± 10 %	18,5-22	25-30	36 ÷ 50	500	700	250	50
Q3A/220-300	3 x 400 V ± 10 %	22-30	30-40	45 ÷ 63	600	900	300	80
Q3A/300-370	3 x 400 V ± 10 %	30-37	40-50	57 ÷ 75	600	900	300	80
Q3A/370-450	3 x 400 V ± 10 %	37-45	50-60	70 ÷ 90	600p	1300p	300p	90
Q3A/450-550	3 x 400 V ± 10 %	45-55	60-75	80 ÷ 108	600p	1500p	300p	120
Q3A/550-750	3 x 400 V ± 10 %	55-75	75-100	105 ÷ 138	600p	1500p	300p	120
Q3A/750-900	3 x 400 V ± 10 %	75-90	100-125	138 ÷ 185	600p	1700p	400p	150
Q3A/900-1100	3 x 400 V ± 10 %	90-110	125-150	175 ÷ 210	600p	1700p	400p	150
Q3A/1100-1320	3 x 400 V ± 10 %	110-132	150-180	210 ÷ 260	800p	1900p	400p	200
Q3A/1320-1600	3 x 400 V ± 10 %	132-160	180-218	250 ÷ 305	800p	1900p	400p	200
Q3A/1600-2000	3 x 400 V ± 10 %	160-200	218-273	290 ÷ 400	800p	1900p	400p	230
Q3A/2000-2500	3 x 400 V ± 10 %	200-250	273-340	400 ÷ 460	1000p	1900p	400p	230
Q3A/2500-3150	3 x 400 V ± 10 %	250-315	340-430	450 ÷ 580	1000p	1900p	400p	250

Dimensions note: P indicates floor mounted control panel

CB-Q3A_b_te

Engineered for life

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX

Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / E-mail : service-commercial@motralec.com

www.motralec.com