



ITT

General Catalogue

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / E-mail : service-commercial@motralec.com
www.motralec.com

Lowara

QYR Series

Three-phase electric panels for the protection and control of a three-phase drainage pump with star-delta starting.

SPECIFICATIONS

Automatic control through electromechanical floats

Supply voltage: 3 x 400 V ±10%

Frequency: 50/60 Hz

Power: 3 to 75 kW

Star-delta starting

Protection: IP54

Ambient temperature: -5 to +40 °C (limit specified by EN standard 60439-1)

Maximum relative humidity: 50% at +40°C provided that no condensation occurs (limit specified by EN standard 60439-1)

Wall mounted

Metal enclosure

Power, thermal overload, high level indicator lights

Alarm reset button

/TS version with stator thermal protection circuit

/WD version with water control probe in oil bath and stator thermal protection

OPTIONAL ACCESSORIES

- Audible or visual signalling device, 12 Vdc 0.3 A max. (inside the electric panel there are two connection terminals) for high-level alarm
- VR3 (for QDR) three-phase module for overvoltage protection (lightning protector)



For proper electric panel-electric pump selection, make sure that the Ampere input of the motor falls within the rated current range shown in the table.

Engineered for life




ITT

Lowara

General Catalogue

QYR SERIES

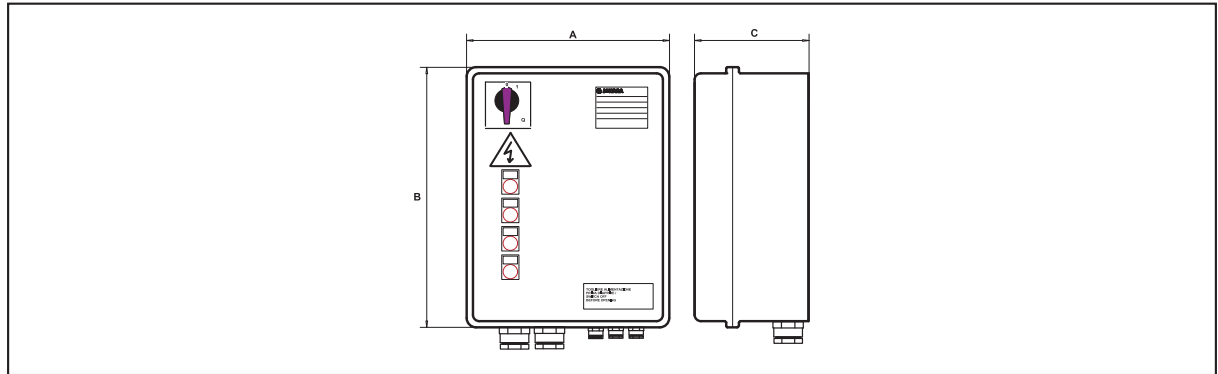

PANEL TYPE	RATED VOLTAGE V	RATED POWER		RATED CURRENT A	DIMENSIONS			WEIGHT Kg
		kW	HP		A mm	B mm	C mm	
QYR/40	3 x 400 V ± 10 %	3 4	4 5,5	6,3 ÷ 10	400	600	200	27
QYR/75	3 x 400 V ± 10 %	5,5 7,5	7,5 10	10 ÷ 16	400	600	200	27
QYR/92	3 x 400 V ± 10 %	9,2	12,5	16 ÷ 20	400	600	200	27
QYR/110	3 x 400 V ± 10 %	11	15	20 ÷ 25	400	600	200	27
QYR/150	3 x 400 V ± 10 %	15	20	22 ÷ 32	400	600	200	27
QYR/185	3 x 400 V ± 10 %	18,5	25	28 ÷ 40	400	600	200	27
QYR/220	3 x 400 V ± 10 %	22	30	36 ÷ 50	500	700	200	32
QYR/300	3 x 400 V ± 10 %	30	40	45 ÷ 63	500	700	200	32
QYR/370	3 x 400 V ± 10 %	37	50	57 ÷ 75	600	800	250	35
QYR/450	3 x 400 V ± 10 %	45	÷ 60	70 ÷ 90	600	900	250	37
QYR/550	3 x 400 V ± 10 %	55	75	80 ÷ 108	600	900	250	37
QYR/750	3 x 400 V ± 10 %	75	100	105 ÷ 138	600p	1300p	300p	70
QYR/40/TS	3 x 400 V ± 10 %	3 4	4 5,5	6,3 ÷ 10	400	600	200	27
QYR/75/TS	3 x 400 V ± 10 %	5,5 7,5	7,5 10	10 ÷ 16	400	600	200	27
QYR/92/TS	3 x 400 V ± 10 %	9,2	12,5	16 ÷ 20	400	600	200	27
QYR/110/TS	3 x 400 V ± 10 %	11	15	20 ÷ 25	400	600	200	27
QYR/150/TS	3 x 400 V ± 10 %	15	20	22 ÷ 32	400	600	200	27
QYR/185/TS	3 x 400 V ± 10 %	18,5	25	28 ÷ 40	400	600	200	27
QYR/220/TS	3 x 400 V ± 10 %	22	30	36 ÷ 50	500	700	200	32
QYR/300/TS	3 x 400 V ± 10 %	30	40	45 ÷ 63	500	700	200	32
QYR/370/TS	3 x 400 V ± 10 %	37	50	57 ÷ 75	600	800	250	35
QYR/450/TS	3 x 400 V ± 10 %	45	60	70 ÷ 90	600	900	250	37
QYR/550/TS	3 x 400 V ± 10 %	55	75	80 ÷ 108	600	900	250	37
QYR/750/TS	3 x 400 V ± 10 %	75	100	105 ÷ 138	600p	1300p	300p	70
QYR/40/WD	3 x 400 V ± 10 %	3 4	4 5,5	6,3 ÷ 10	400	600	200	28
QYR/75/WD	3 x 400 V ± 10 %	5,5 7,5	7,5 10	10 ÷ 16	400	600	200	28
QYR/92/WD	3 x 400 V ± 10 %	9,2	12,5	16 ÷ 20	400	600	200	28
QYR/110/WD	3 x 400 V ± 10 %	11	15	20 ÷ 25	400	600	200	28
QYR/150/WD	3 x 400 V ± 10 %	15	20	22 ÷ 32	400	600	200	28
QYR/185/WD	3 x 400 V ± 10 %	18,5	25	28 ÷ 40	400	600	200	28
QYR/220/WD	3 x 400 V ± 10 %	22	30	36 ÷ 50	500	700	200	33
QYR/300/WD	3 x 400 V ± 10 %	30	40	45 ÷ 63	500	700	200	33
QYR/370/WD	3 x 400 V ± 10 %	37	50	57 ÷ 75	600	800	250	33
QYR/450/WD	3 x 400 V ± 10 %	45	60	70 ÷ 90	600	900	250	38
QYR/550/WD	3 x 400 V ± 10 %	55	75	80 ÷ 108	600	900	250	38
QYR/750/WD	3 x 400 V ± 10 %	75	100	105 ÷ 138	600p	1300p	300p	71

Dimensions: p = floor mounted cabinet

CB-QYR_c_te

Engineered for life

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX

Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / E-mail : service-commercial@motralec.com

www.motralec.com

