

Controllable diaphragm pumps

C 409.2, C 410.2



sera

Seybert & Rahier

The new 4 C-designs

intelligent, multifunctional, versatile, economic...

sera - controllable diaphragm pumps

of serie C 409.2 and C 410.2 are electronically controlled dosing pumps which can be used for many applications. They are designed for industrial use and guarantee highest operational reliability. Performance range between 0,8 l/h and 1450 l/h, pressures up to max. 10 bar.

Application

Liquid chemicals with aggressive, odorous, abrasive, flammable, viscous or toxic properties.

...further features of performance

- directly controllable
- PROFIBUS DP - Interface
- high dosing accuracy
- long service life of diaphragms*
- high-quality materials
- linear control characteristic
- low maintenance
- low operating expenses
- leakagefree
- unlimitedly safe to run dry
- easy to operate
- low weight

* compared to common conventional diaphragms



motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com

Controllable diaphragm pumps

C 409.2, C 410.2



sera


Seybert & Rahier



Controllable diaphragm pump, type C 409.2



Controllable diaphragm pump, type C 410.2 (0,37 kW)

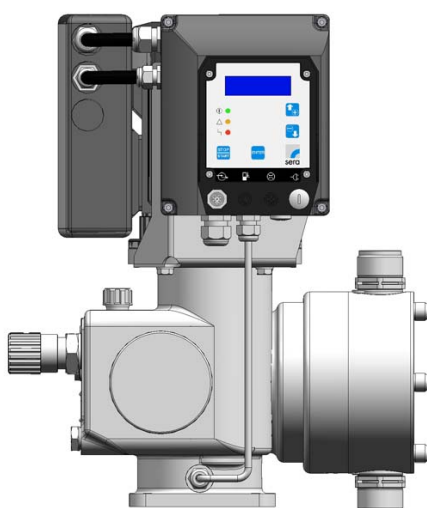

Controllable diaphragm pump, type C 410.2 (0,75 ... 1,5 kW)

Functions of the control electronics

Function

Manual operation
Manual stroke frequency adjustment
PROFIBUS DP - Interface
External ON
External STOP
Pulse operation
Fractionation
Cycle delay
Analogue operation (PROFIBUS)
Analogue operation 0 – 20 mA ¹⁾
Analogue operation 4 – 20 mA ¹⁾
Analogue operation standardization ¹⁾
Charge manual ¹⁾
External charge START
Charge with timer ¹⁾
Speed control / Slow mode
3 LEDs for status indication
Multiline illuminated text display
Operating messages in plain text
Fault indication in plain text
Menu - driven parameterization
Flow indication
Calibration
Working hour meter
Password protection
4 – key operation
2 digital outputs (PLC) ¹⁾
1 digital input (PLC or contact signal) ¹⁾
2 analogue / digital inputs (optionally reversible) ¹⁾
Programmable input/output functions ¹⁾
Connection / evaluation 2-stage level monitoring
Connection / evaluation diaphragm rupture monitoring
Connection / evaluation flow monitoring
Connection / evaluation flow metering
Operating panel for wall mounting (option)

¹⁾ inapplicable when supplied with PROFIBUS DP-interface

Controllable diaphragm pumps

C 409.2, C 410.2



sera

Seybert & Rahier

Technical data

Pump type	Nominal capacity		max. counter-pressure	max. suction height	Inlet-/Outlet-size	Driving power (motor)	Nominal stroke-frequency
	50/60Hz [l/h]	Q _{stroke} [ml/Stroke]	p ₂ max. [bar]	[mWC]	DN [mm]	P _M [kW]	50/60Hz [l/h]
C 409.2							
C 409.2 – 0,8e	0 – 0,8	0 – 0,13	10	2	5	0,18	100
C 409.2 – 1,6e	0 – 1,6	0 – 0,27	10	3	5	0,18	100
C 409.2 – 2,4e	0 – 2,4	0 – 0,27	10	3	5	0,18	150
C 409.2 – 4,0e	0 – 4,0	0 – 0,67	10	3	5	0,18	100
C 409.2 – 7,0e	0 – 7,0	0 – 0,78	10	3	5	0,18	150
C 409.2 – 12e	0 – 12	0 – 3,0	10	3	10	0,18	67
C 409.2 – 18e	0 – 18	0 – 3,0	10	3	10	0,18	100
C 409.2 – 25e	0 – 25	0 – 2,8	10	3	10	0,18	150
C 409.2 – 50e	0 – 50	0 – 8,3	10	3	10	0,18	100
C 409.2 – 75e	0 – 75	0 – 8,3	10	3	15	0,37	150
C 409.2 – 90e	0 – 90	0 – 15,0	8	3	15	0,37	100
C 409.2 – 115e	0 – 115	0 – 19,2	4	3	15	0,37	100
C 409.2 – 140e	0 – 140	0 – 15,6	8	3	15	0,37	150
C 409.2 – 180e	0 – 180	0 – 20,0	4	3	15	0,37	150
C 409.2 – 250e	0 – 250	0 – 41,7	3	3	15	0,37	100
C 409.2 – 350e	0 – 350	0 – 38,9	3	3	15	0,37	150
C 410.2							
C 410.2 – 260e	0 – 260	0 – 48	4	5	15	0,37	90
C 410.2 – 280e	0 – 280	0 – 46	8	5	15	0,75	97
C 410.2 – 510e	0 – 510	0 – 94	3	5	15	0,37	90
C 410.2 – 570e	0 – 570	0 – 98	6	5	15	0,75	97
C 410.2 – 850e	0 – 850	0 – 157	2	3	20	0,37	90
C 410.2 – 900e	0 – 900	0 – 155	5	3	20	1,5	97
C 410.2 – 1450e	0 – 1450	0 – 245	5	3	25	1,5	97

Controllable diaphragm pumps

C 409.2, C 410.2



sera

Seybert & Rahier

Electrical data (electronics)

- Operating voltage (50/60 Hz): 1~115 V ²⁾;
1~230 V;
3~400 V/N/PE ³⁾
- Inlet voltage control input: 5...30 V DC
- Minimale contact signal time ⁴⁾: 55 ms
- Analogue input resistance ⁴⁾: 100 Ω
- Digital Output ⁴⁾: PNP,
internal supply:
max. 15V DC, 50 mA
external supply:
max. 30V DC, 350 mA
- Pump protection type: IP 65
- Insulation class: F

- Permitted ambient temperature: +2°C to +40°C
- Permitted humidity: approx. 90%

Option PROFIBUS

- PROFIBUS DP-VO Slave Interface
- Transmission rate: 9,6 kbit/s ... 12 Mbit/s
- Connection socket M12x1, 5-poe, B-coded

²⁾ Series C 410.2 is not available for 115V-voltage

³⁾ for series C 410.2 with driving power 0,75 and 1,5 kW

⁴⁾ inapplicable when supplied with PROFIBUS DP-interface

Materials

The high quality of the materials ensures continuous and reliable operation. We have the optimum material* for each requirement.

Pump body and valves:

PVC, PP, PVDF, 1.4571, Titan, PP-FRP, PVDF-FRP

Valve balls:

Glass, PTFE, 1.4401

Valve seals:

EPDM, FPM, FEP-covered

Working diaphragm:

EPDM, FPM, PTFE-faced

Intermediate diaphragm:

CSM, PTFE, PTFE-faced

* please ask us for any material required but not mentioned here

Drive

Each drive unit consists of a proven motor coupled to a stroke mechanism in a robust aluminium housing.

sera – aluminium housings can cope with even extreme operating conditions due to the thickness of the material and the surface treatment.

Accessories

- Control cable
- Diaphragm rupture monitoring
- Flow controller
- Flow meter
- PROFIBUS Y - connector
- PROFIBUS T - connector
- PROFIBUS termination resistor



For the optimum installation of a dosing pump we can supply all the necessary accessories such as valves, pulsation dampers, injection fittings, dosing tanks etc. against your order.



sera

Dosing
Feeding
Compressing

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / e-mail : service-commercial@motralec.com
www.motralec.com