




# ANDRITZ Centrifugal Pump

## S Series

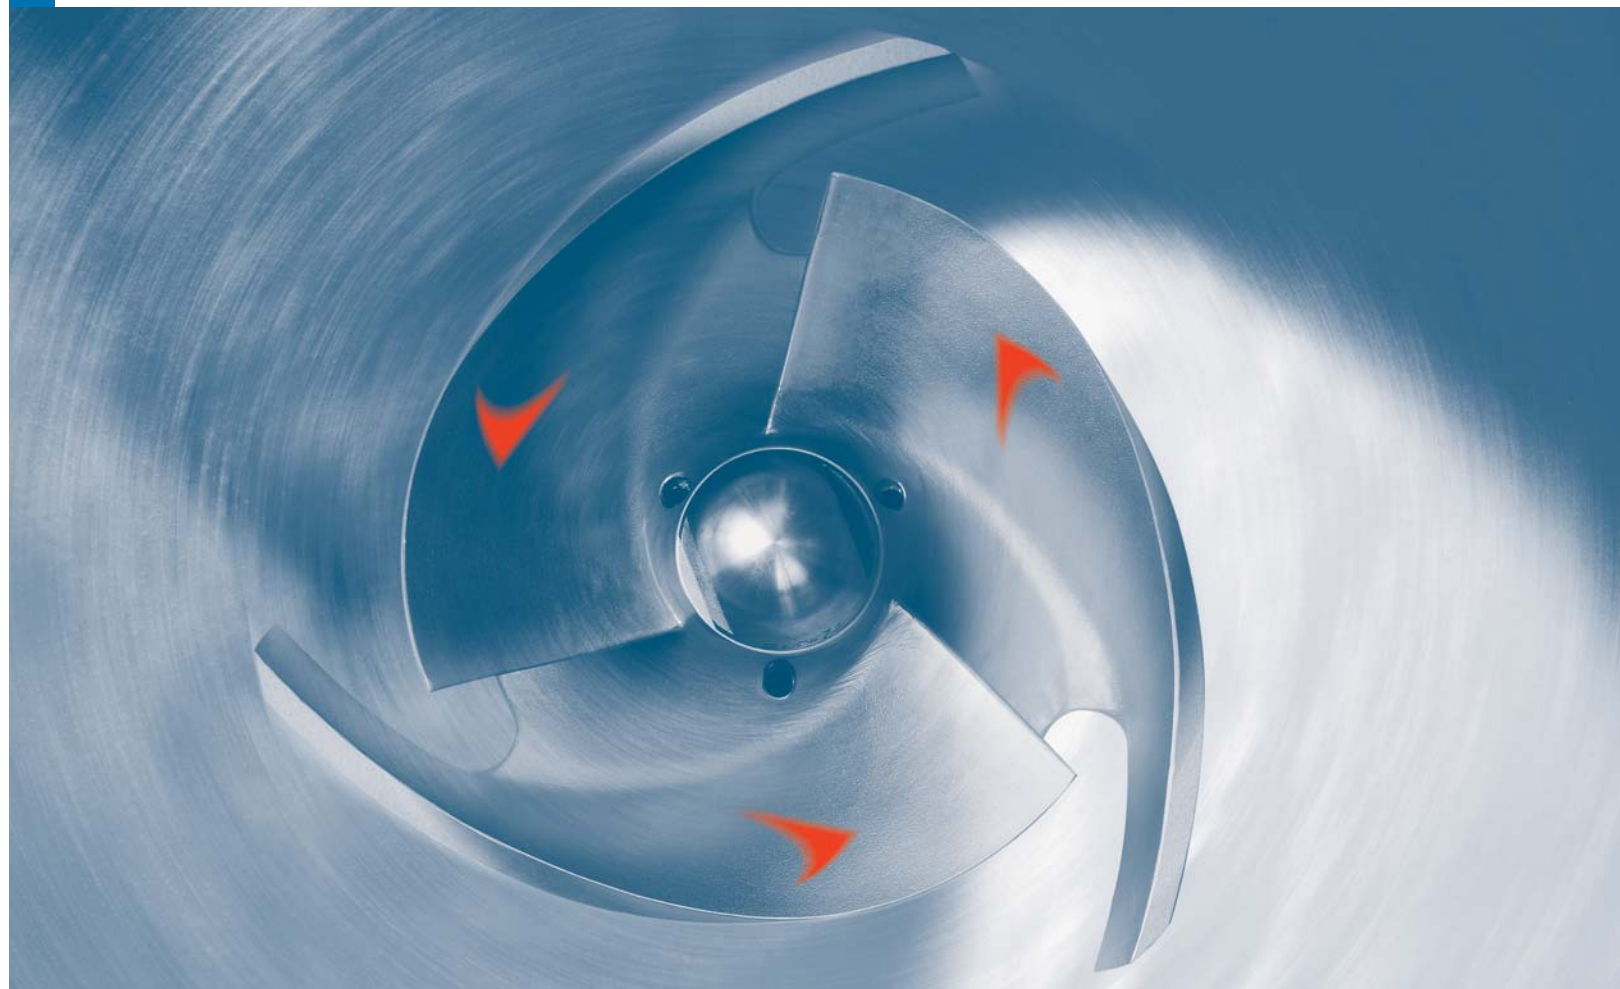

**motralec**

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX  
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48  
Demande de prix / e-mail : [service-commercial@motralec.com](mailto:service-commercial@motralec.com)  
[www.motralec.com](http://www.motralec.com)

# For clean and solids-containing media

For over 100 years, ANDRITZ has been a byword for competence and innovation in designing centrifugal pumps.

As suppliers of complete production systems for the pulp and paper industry we have acquired broad expertise of the related process technologies –the basis for our successful development of components for conveying stock and pulp.

ANDRITZ Centrifugal Pumps, S Series, are operating successfully all over the world. They offer robustness and wear resistance and thus fulfil high customer expectations in terms of efficiency, life cycle, maintenance friendliness and economic efficiency.

## Modular system

The standard components in ANDRITZ Pumps provide high availability and enable the use of proven components.

## Fields of application:

- Pulp production
- Recycled fibre preparation
- Papermaking
- Chemical industry
- Food industry
- Energy supply
- Water supply
- Waste water treatment

## The facts:

- Flow rates up to 4000 m<sup>3</sup>/h
- Heads up to 140 m
- Casing pressure up to 16 bar
- Temperature up to 140°C
- Consistency up to 6% bone dry




## Technology to convince you

The high standard of ANDRITZ Centrifugal Pumps, S Series, is based on decades of experience in designing hydraulic machines and on extensive process know-how.

## Proven open-impeller design

The open-impeller design of the ANDRITZ Centrifugal Pumps S Series is characterized by low axial thrust. With its open channels, it is suitable for conveying many different media.



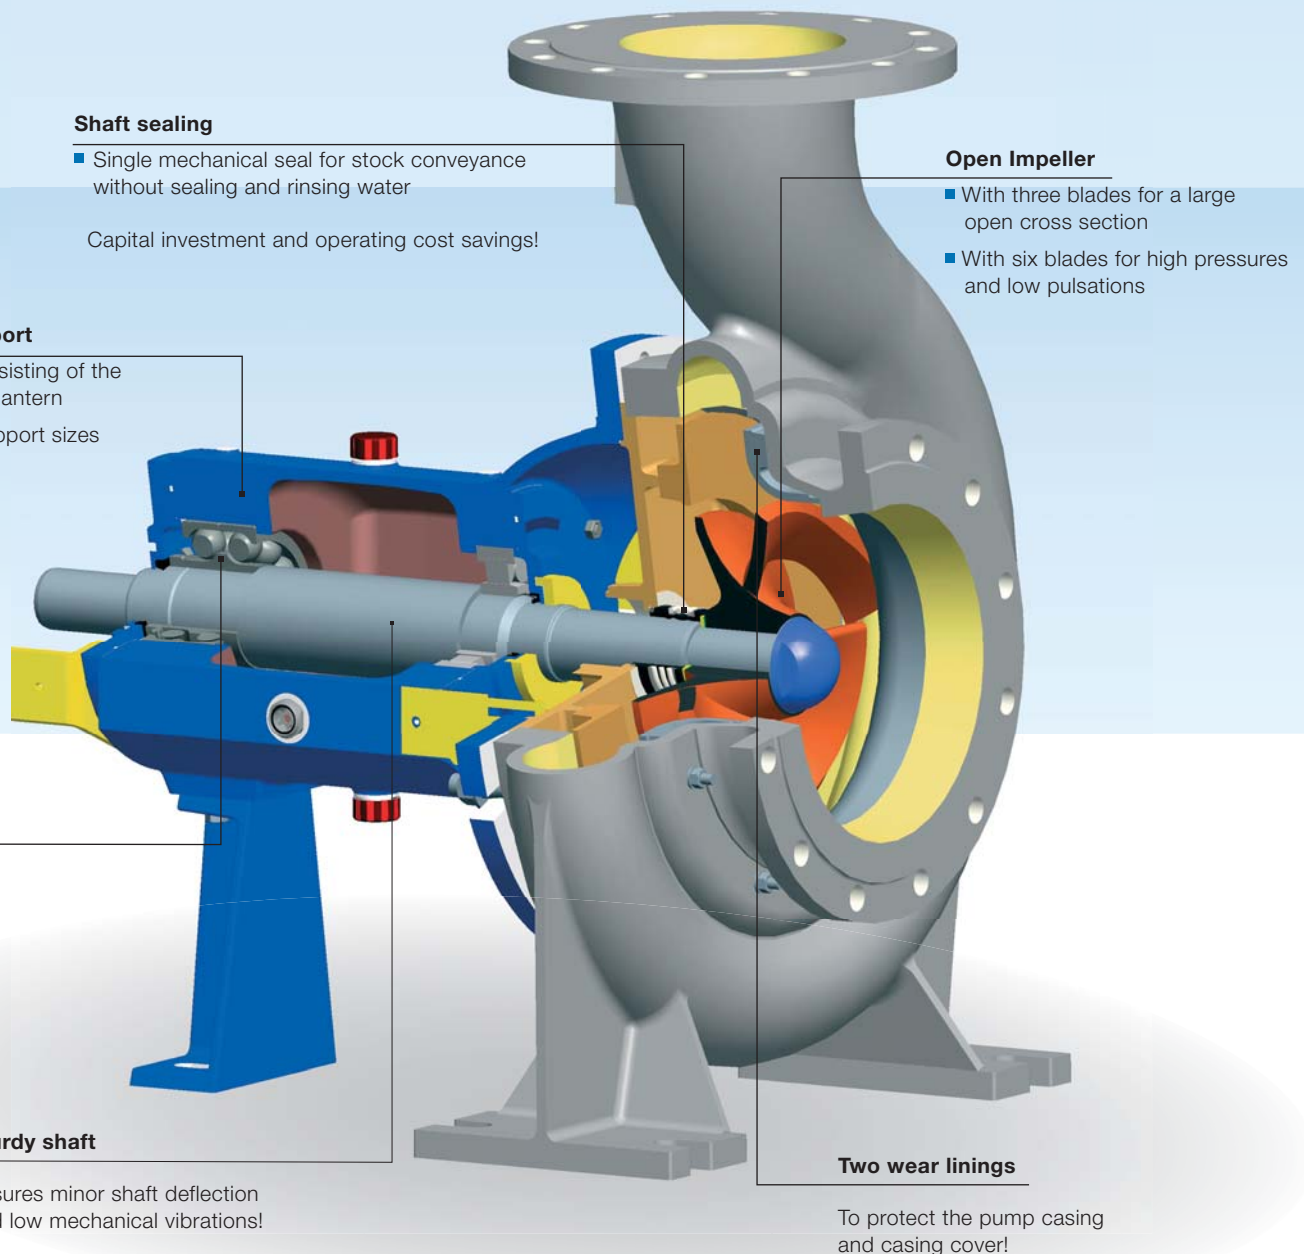


## High research and development capabilities

We run a pilot plant at our affiliate ASTRÖ, which enjoys international renown for its hydraulic developments and investigations. The high quality, safety and reliability of the S Pump Series are ensured by extensive model testing.

## Modular sealing system

Easy adaptation to changed conditions at low cost:

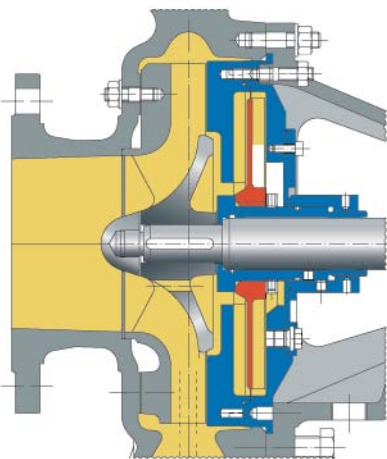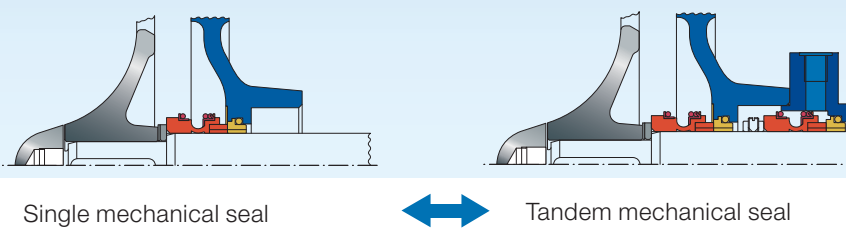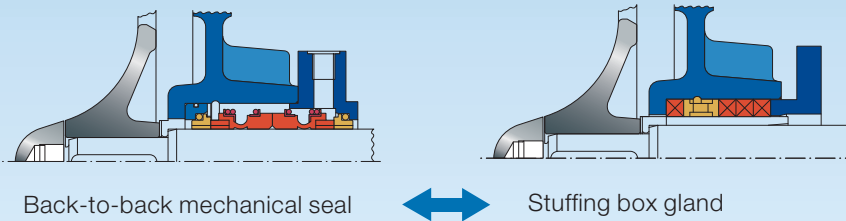


Cartridge-type dynamic seal,  
all parts made of stainless,  
acid-proof steel




# Characteristic curves

## ANDRITZ Centrifugal Pumps, S Series

**Characteristic curve 1500 rpm**

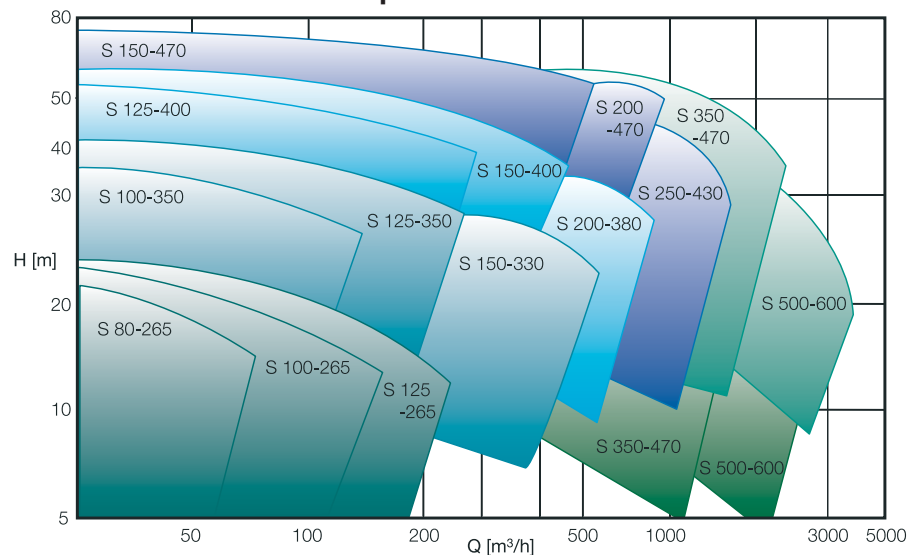

**Characteristic curve 3000 rpm**

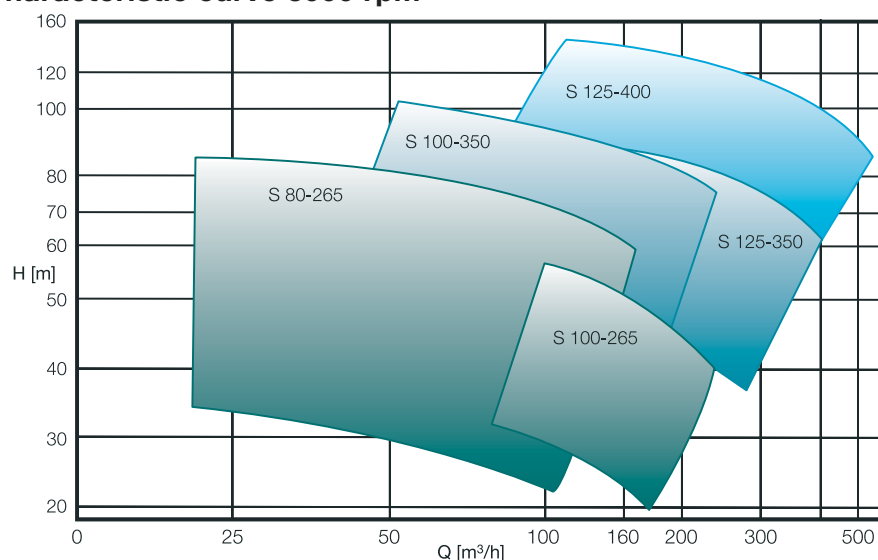


### Material combinations

S Series	EN-GJL 250	1.4460	1.4021	1.4462	1.4517	1.4517 h	1.4404	1.4439	1.4468
Impeller		■				■			
Casing/casing cover	■	■							
Bearing housing	■								■
Front and rear lining		■				■			
Stuffing box body	■	■							
Shaft			■	■			■	■	

European standard			US standard	
Number	Name	Grade	UNS	
EN-JL1040	EN-GJL 250	Class 40B	/	
1.4460	X3CrNiMoN27-5-2	Grade 1A	J93370	
1.4021	X20Cr13	420	S42000	
1.4462	X2CrNiMoN22-5-3	S32205	S32205	
1.4517	GX2CrNiMoCuN25-6-3-3	Grade 1C	J93373	
1.4517 hardened	GX2CrNiMoCuN25-6-3-3	Grade 1C	J93373	

## Close to our customers

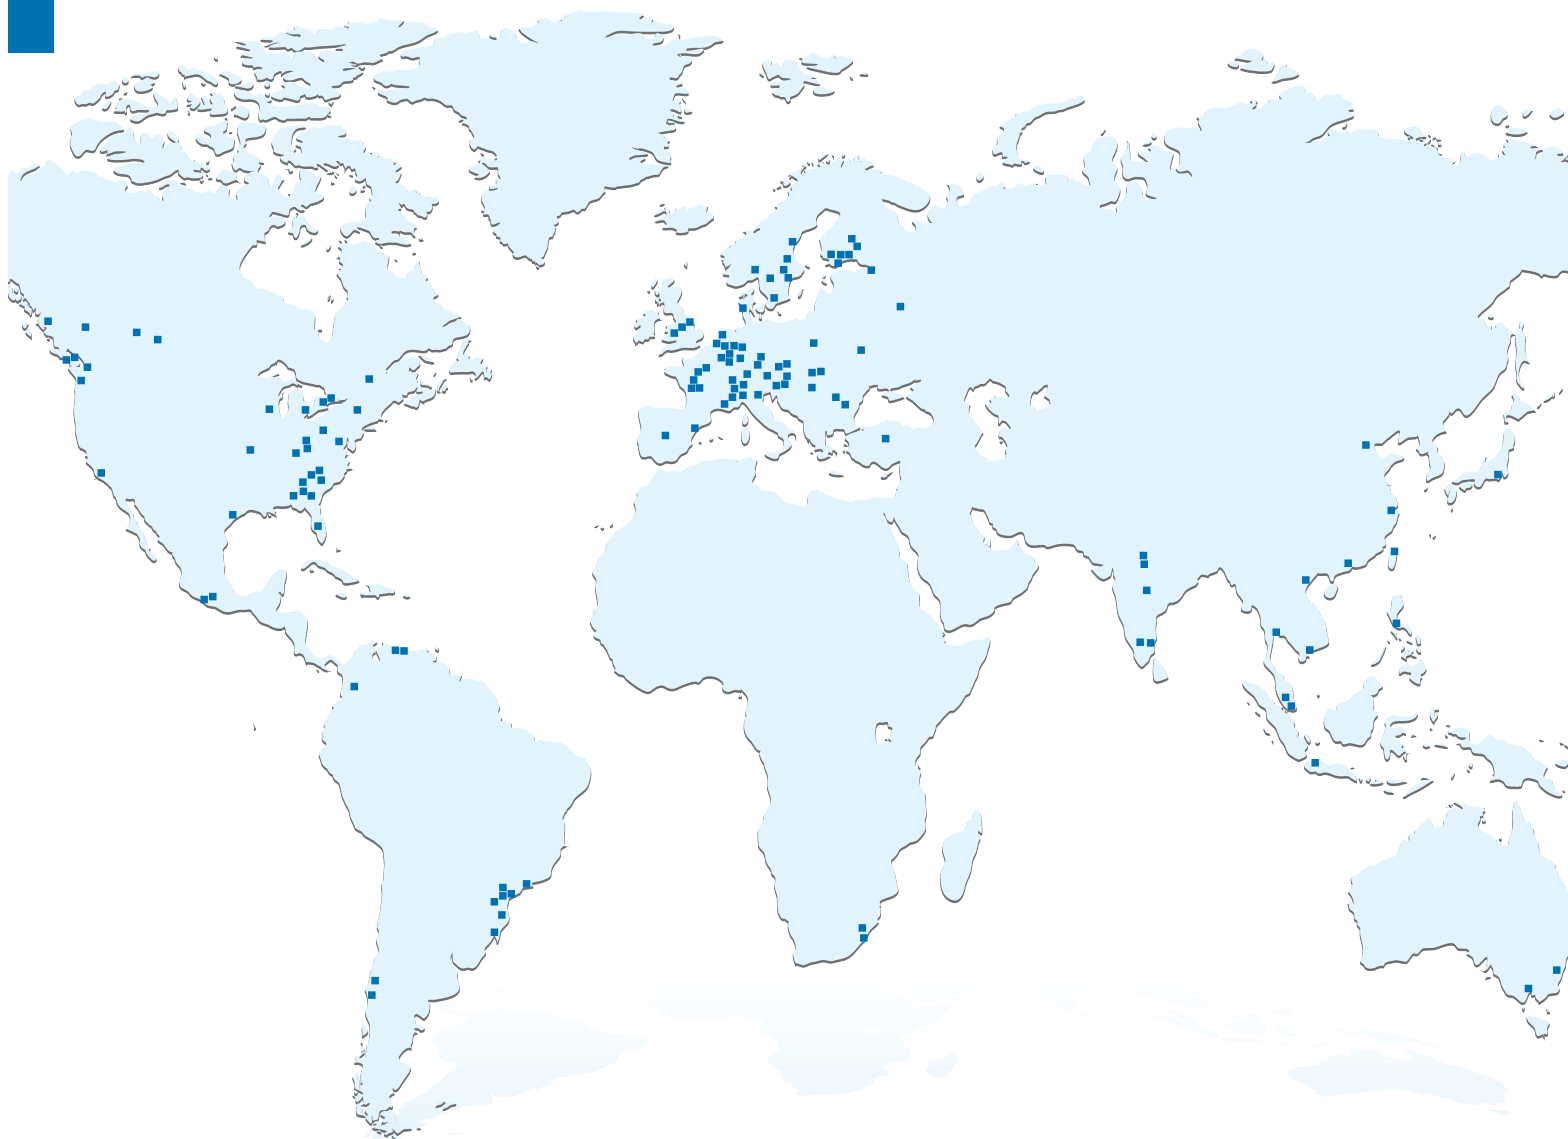

**motralec**

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX  
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48  
Demande de prix / e-mail : [service-commercial@motralec.com](mailto:service-commercial@motralec.com)  
[www.motralec.com](http://www.motralec.com)

HPU.s.02.eng.09.09