



motralec


4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / e-mail : service-commercial@motralec.com
www.motralec.com

ProCam Hygienic Diaphragm Metering Pumps

The ProCam Hygienic has been developed to meet the highest standards of the European Engineering and Design Group (EHEDG). The cleaning characteristics have been improved by a special pump valve design.

- **Capacity for each pumphead: 0.15 - 158 GPH**
- **Maximum operating pressure: up to 300 psi**
- Hermetically sealed metering pumps with PTFE double diaphragm (FDA approved) and diaphragm monitoring service by pressure gauge or pressure switch.
- Hygienically optimized valves for ideal cleaning and sterilization.
- Low hold-up time of fluid in pumphead without dead zones.
- Double diaphragm and gaskets made of PTFE (FDA approved).
- Painting according to FDA Standards.
- Front cover, valves and connections in material SS316L

with surface roughness
Ra 0.4 up to 0.8 by
electropolishing.

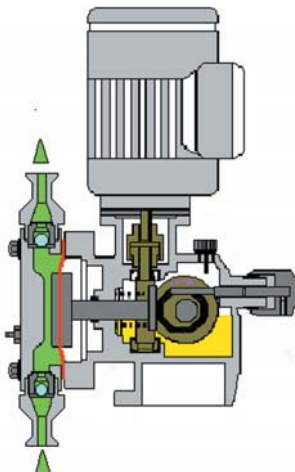

Applications

- Suitable for CIP (Cleaning-in-Place) up to 300° F.
- Suitable for SIP (Sterilizing-in-Place) by saturated steam at 250° F.
- Suitable for stringent hygienic and sterile needs in the pharmaceutical industry and biotechnology, in cosmetic industries and personal care as well as for food and beverages.
- In accordance with Directive 94/9/EC (ATEX100a).
- Flexibility due to multi-head pumps.



SPX®



Electropolished pumphead Ra <0.8 with pressure switch for diaphragm monitoring service



Clamp-connection and ball valve in SS316L with Ra <0.8, PTFE gaskets (FDA approved)

PROCAM CAPACITY CHART						
Type	Nominal Max. Capacities (GPH) @ Stroke Speeds				Max. Pressure** Psig.	Connections Clamp
Gear Ratio Stroke Speed	28:1 60	19:1* 86	28:1 120	19:1* 172		
*39:2 for DS 200 & 500						
316 Stainless Steel Pumphead						
DS 15	1.6	2.4	3.2	4.7	300	1/2"
DS 50	5.5	7.9	11.1	15.8	150	1/2"
DS 100	11.1	15.8	22.2	31.6	60	1/2"
DS 200	22.2	31.7	44.4	63.4	150	1/2"
DS 500	55.5	79.3	111	158.5	60	1"

** For pumps with 4-6 heads the max. pressure is 50% of the given value.

SPX®

PROCESS EQUIPMENT



motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX

Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com