



Max-Flo II™

MEDIUM HEAD PUMP SERIES

PUMPS

Count on a great pool experience every time.

Max-Flo II is held to the same excellent standard as the original. New and improved features such as union connections and an elevated base make it the ideal choice for both new pool and aftermarket installations.

When you're looking for both economy and performance, specify Max-Flo II.



Max-Flo II provides exceptional value by building upon the outstanding reputation of the original through updated features such as CPVC unions, an elevated motor base and a larger leaf holding capacity strainer basket. For a great pool experience every time, count on Max-Flo II.



1-1/2" x 2" CPVC unions available on all models.


Pump Features & Benefits

- All models include 1-1/2" x 2" CPVC union connections
- Elevated base insures better ventilation for cooler running and protection from flooding
- Pressure testable to 50 psi maximum
- Heavy-duty, high performance motor is designed for environments up to 122°F
- Extra leaf-holding capacity basket extends time between cleanings
- Tri-Lock cam and ramp strainer cover design seals with less than a quarter turn
- See-through strainer cover lets you see when the basket needs cleaning
- Service-ease design provides easy access to internal components by removing only four bolts
- Self-priming (suction lift up to 8' above water level)

Applications


- In-ground pools of all types and sizes
- In-ground spas

Overall Dimensions

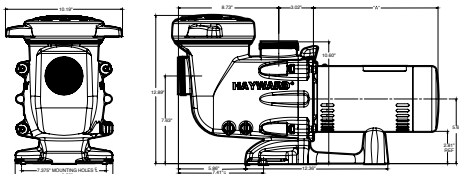

MODEL NUMBER	TOTAL H.P.	MAX-RATED H.P.	SERVICE FACTOR	VOLTAGE	PIPE SIZE	DIMENSION "A"	CTN. QTY.	CTN WEIGHT
ENERGY EFFICIENCY MAX RATED SINGLE-SPEED								
SP2705X7EE	0.95	3/4	1.27	115/208-230	2"	13-3/4"	1	34 lbs
STANDARD EFFICIENCY MAX RATED SINGLE-SPEED								
SP2705X7	0.95	3/4	1.27	115/208-230	2"	13-3/4"	1	34 lbs
SP2707X10	1.25	1	1.25	115/208-230	2"	14-1/4"	1	37 lbs
SP2710X15	1.65	1-1/2	1.1	115/208-230	2"	15-1/2"	1	42 lbs
SP2715X20	2.10	2.0	1.05	115/208-230	2"	15-1/2"	1	45 lbs
STANDARD EFFICIENCY MAX RATED DUAL-SPEED								
SP2707X102	1.25	1	1.25	230	2"	15"	1	41 lbs
SP2710X152	1.65	1-1/2	1.1	230	2"	15-1/2"	1	43 lbs
SP2710X152	2.10	2.0	1.05	230	2"	16"	1	46 lbs

Performance Curves – Max-Flo II (Improved) Pump

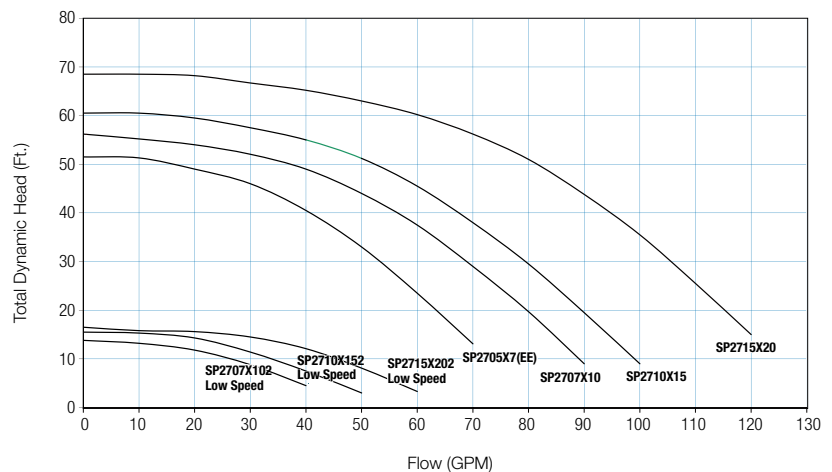

To take a closer look at Max-Flo II Pumps or other Hayward products, go to www.haywardpool.com or call 1-888-HAYWARD

Max-Flo II Series Pumps are listed by:



Hayward and Max-Flo II are registered trademarks of Hayward Industries, Inc. ©2011 Hayward Industries, Inc.

LITMAXFLI11

www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10

Fiche produit Hayward MAX FLO II - fiche technique | Motralec

■ DEMANDE DE PRIX RAPIDE : <https://www.motralec.com/demandeContact>