

S10 V2TT MPSU



1 pompe MPSU à vitesse variable - VARIOMAT2TT




S10 V2TT MPSU505

	Référence	€ HT	Débit maxi en m³/h	Pression en bars		400 Volts	
				Mini	Maxi	kW	A
A	S10 V2TT MPSU304	2836	4.5	1.6	4.4	0.55	1.6
B	S10 V2TT MPSU305	2878		1.9	5.3	0.75	1.9
C	S10 V2TT MPSU306	2958		2.3	6.5	0.90	2.2
D	S10 V2TT MPSU504	3012	8	1.3	4.3	0.90	2.2
E	S10 V2TT MPSU505	3080		1.3	5.3	1.10	2.6
F	S10 V2TT MPSU506	3138		1.6	6.6	1.10	2.8

	Réservoir à diaphragme 10 bars CE	Asp.	Ref.	VARIOMAT2 400 Volts	Dimensions mm			Poids kg
		Femelle			Lg	I	Ht	
A	PWB 8L10	1"1/4	1"	9TT	600	320	1525	29
B							1574	30
C							1598	31
D	PWB 18L10	1"1/2	1"1/4	9TT	600	320	1688	34
E							1712	35
F							1781	37

Pompe MPSU : page 15 - VARIOMAT2TT : page 305 - Réservoir : page 185.

S10 V2TT MXV-B 1 pompe MXV-B à vitesse variable - VARIOMAT2TT

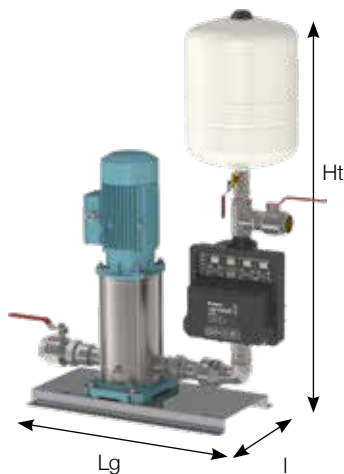

S10 V2TT MXV-B40-805

	Référence	€ HT	Débit maxi en m³/h	Pression en bars		400 Volts	
				Mini	Maxi	kW	A
A	S10 V2TT MXV-B25-204	3161	4.5	1.70	4.4	0.75	1.9
B	S10 V2TT MXV-B32-404	3245	8	1.45	4.5	1.10	2.7
C	S10 V2TT MXV-B32-406	3323		2.25	6.8	1.50	4.3
D	S10 V2TT MXV-B40-803	3351	13	1.55	3.55	1.10	2.7
E	S10 V2TT MXV-B40-805	3434		2.6	5.9	2.20	5.3
F	S10 V2TT MXV-B50-1803	3735	25	0.9	3.55	2.20	5.3

	Réservoir à diaphragme 10 bars CE ou à vessie 16 bars CE	Asp.	Ref.	VARIOMAT2 400 Volts	Dimensions mm			Poids kg
		Femelle			Lg	I	Ht	
A	PWB 8L10	1"1/4	1"	9TT	600	320	948	42
B	PWB 18L10	1"1/2	1"1/4	9TT	600	320	1063	46
C							49	
D	PEB 24LX10	2"	1"1/2	9TT	600	320	1148	51
E							57	
F	PWB 35LX10	2"1/2	1"1/2	9TT	600	320	1201	62

Pompe MXV-B : page 19 - VARIOMAT2TT : page 305 - Réservoir : page 185.

S10 V2TT MXV 1 pompe MXV à vitesse variable - VARIOMAT2TT



S10 V2TT MXV40-805

	Référence	€ HT	Débit maxi en m³/h	Pression en bars		400 Volts	
				Mini	Maxi	kW	A
A	S10 V2TT MXV25-204	3321	4.5	1.7	4.4	0.75	1.9
B	S10 V2TT MXV32-404	3410	8	1.45	4.5	1.10	2.7
C	S10 V2TT MXV32-406	3521		2.25	6.8	1.50	4.3
D	S10 V2TT MXV40-804	3668	13	2.1	4.7	1.50	4.3
E	S10 V2TT MXV40-805	3707		2.6	5.9	2.20	5.3
F	S10 V2TT MXV50-1504	4462	24	2.4	5.8	3.00	6.6

	Réservoir à diaphragme 10 bars CE	Asp.	Ref.	VARIOMAT2 400 Volts	Dimensions mm			Poids kg
		Femelle			Lg	I	Ht	
A	PWB 8L10	1"1/4	1"	9TT	600	320	948	49
B	PWB 18L10	1"1/2	1"1/4	9TT	600	320	948	52
C							1063	57
D	PEB 24LX10	2"	1"1/2	9TT	600	320	1063	60
E							1148	64
F	PWB 35L X10	2"1/2	1"1/2	9TT	600	320	1148	98

Pompe MXV : page 20 - VARIOMAT2TT : page 305 - Réservoir : page 185.