

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current	Input power	Acoustic pressure level 7m	Specific power
				I A	P _{sys} W	L _{pA} dB(A)	P _{spez} Wh/1000m ³
ZN091-ZL_GQ.V5P1	I	1180	①	7.20	4800		
			②	5.80	3800		191.1
			③	3.60	2300	63	65.3
			④	4.40	2800	62	85.9
	II	940	⑤	5.40	3500		
			⑥	3.10	1950		122.6
			⑦	1.95	1200	56	42.7
			⑧	2.50	1600	55	64.8
	III	710	⑨	2.40	1550		
			⑩	1.50	880		73.0
			⑪	1.05	560	48	26.4
			⑫	0.94	480		
	IV	470	⑬	0.68	300		
			⑭	0.54	210	39	37.3
							14.7

Current values determined at 400V

Fan ordering information

Design	Airflow direction			Airflow direction		
	L (guard grille suction side) Ontop	Q (guard grille suction side)	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side)
Type	ZN091-ZIL.GQ.V5P1	ZN091-ZIQ.GQ.V5P1	ZN091-ZIL.GQ.V5P1	ZN091-ZIL.GQ.V5P1	ZN091-ZIQ.GQ.V5P1	ZN091-ZIQ.GQ.V5P1
Article no.	169057	169058	168069	168070	168071	168072
Weight kg	53.30	57.10	49.70	51.60	53.60	55.50
ZApus attachable on both sides.						

Control technology

Control module UNIcon Zenec switch




Page 130




Page 158


Design L - ZApus Ontop, guard grille pressure side

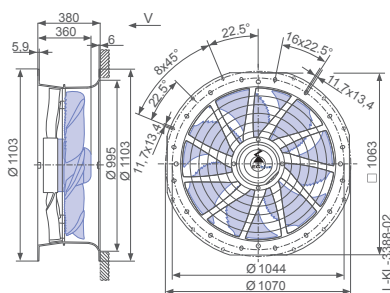

Design Q - ZApus with adapter plate, without guard grille

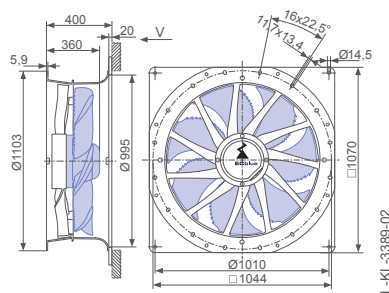

Design Q - ZApus with adapter plate, guard grille pressure side

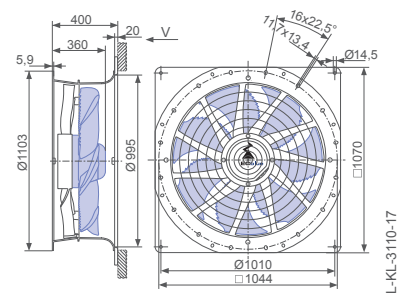

www.ziehl-abegg.com

Fiche produit Motralec Ziehl Abegg Fe2Owlet Ecblue With Zaplus ZN091 - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

Besoin d'un prix ou d'un conseil technique ?

Ventilateur Ziehl Abegg FE2OWLET ECBLUE WITH ZAPLUS ZN091



4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

Voir la gamme Ziehl Abegg sur notre site :

www.motralec.com/.../ziehl-abegg

DEMANDER UN PRIX >