

Fiche produit Motralec Ziehl Abegg Ffowlet Ecblue FF080 - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

Low pressure fans www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10 Agriculture

FFowlet-ECblue

for single phase alternating current, 200-277 V

FF080



Description

Motor technology: EC
 Rated voltage U_N : 1~200-277 V*
 Rated frequency f_N : 50/60 Hz*
 Input power P_{sys} : 1.15 kW*
 Rated current I_N : 5.80- 4.20 A*
 Rated speed n_N : 1090 min⁻¹*
 Thermal class: THCL155*
 Min. permitted ambient temperature $t_{R(min)}$: -35 °C***
 Max. permitted ambient temperature $t_{R(max)}$: 40 °C
 Electrical connection: Integrated controller with attached cable
 Number of blades: 3
 Degree of protection : IP55
 Motor protection: Integrated active temperature management
 Blades: Aluminium, powder-coated, ultramarine blue
 Rotor: Aluminium, 1 coat paint, ultramarine blue
 Conformity: ErP 2015, CE, UL

ErP-data


Efficiency η_{rated} : 48.8 %
 Efficiency: $\eta_{actual} = 54.8 / N_{target} = 40$ **
 EC controller integrated

* Rated data

**ErP 2015

*** Continuous operation with occasional starts (S1) according to DIN EN 60034-1:2011-02. Occasional starting between -35 °C and -25 °C is permissible. Continuous operation below -25 °C only with special bearings for refrigeration applications on request.

Characteristic curve

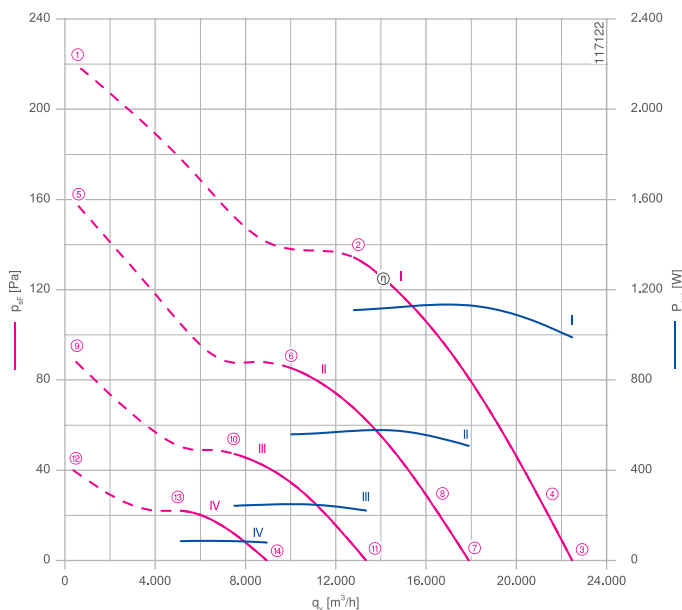

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.


Connection diagram Page 173
 0-10 V 1360-389
 10-0 V

System components Page 110

Dimensions mm


Airflow direction A

Design T - for installation in chimney exhausts, without guard grille



L-KL-3037-03


Design Q - square full bell mouth, without guard grille



L-KL-3204-03

Wall ring plate made of galvanized sheet steel

Design Q - square full bell mouth, guard grille suction side






L-KL-3420-03

Wall ring plate made of galvanized sheet steel



Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current	Input power	Acoustic pressure level 7m	Specific power
				I A	P _{sys} W	L _{pA} dB(A)	P _{spez} Wh/1000m ³
FF080-ZI_DG_3P1	I	1090	①	5.20	1200		
			②	4.80	1100		87.6
			③	4.40	980	52	44.0
			④	4.60	1050	52	51.3
	II	870	⑤	3.20	720		
			⑥	2.50	560		55.7
			⑦	2.30	500	47	28.4
			⑧	2.50	560	50	35.1
	III	650	⑨	1.40	310		
			⑩	1.10	240		32.4
			⑪	1.00	220	42	16.6
			⑫	0.52	110		
	IV	440	⑬	0.44	85		16.8
			⑭	0.42	80	35	8.9

Current values determined at 230V

Fan ordering information

Airflow direction A			
Design	T (without guard grille)	Q (without guard grille)	Q (guard grille suction side)
			
Type	FF080-ZIT.DG.A3P1	FF080-ZIQ.DG.A3P1	FF080-ZIQ.DG.A3P1
0-10 V	Article no. 170255	170253	170254
10-0 V	Article no. 170260	170258	170259
Wall ring plate		Wall ring plate made of galvanized sheet steel	Wall ring plate made of galvanized sheet steel
Weight kg	14.50	30.10	33.90

Control technology

Control module UNIcon Zenec switch	
	
Page 130	Page 158

www.ziehl-abegg.com



Fiche produit Motralec Ziehl Abegg Ffowlet Ecblue FF080 - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

Besoin d'un prix ou d'un conseil technique ?

Ventilateur Ziehl Abegg FFOWLET ECBLUE FF080



4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

Voir la gamme Ziehl Abegg sur notre site :

www.motralec.com/.../ziehl-abegg

DEMANDER UN PRIX >