

Fiche produit Motralec Ziehl Abegg Zaframe Mk2850B - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

System components motors www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10 Drive technology for elevators 2025

ZAframe MK2850B

Maschine frame for ZAtop SM132.21/BS - SM200.30D



Description

- Frame with one deflection pulley
- Bolted sheet metal construction
- Static load: up to 2850 kg
- Typical payload: 300 kg to 1000 kg
- Rope distance (ASL): 400 mm to 1100 mm, adjustable in 50 mm steps
- Traction sheave: 120 mm to 240 mm
- Deflection pulley: 160 mm to 240 mm
- Version as shown or machine rotated by 180°
- Delivery is disassembled

Scope of delivery


- Disassembled frame with fastening material
- Deflection pulley with fastening material
- Rope guard
- Vibration insulation

Options

- Enclosure
- Emergency stop switch retrofit kit

MK2850B				
Motor type	Traction sheave	Deflection pulley D2	ASL	Max. static load
	mm	mm	mm	kg
SM132.21/BS	120	160	420 - 1100	2850
SM132.35/BS	160	160	440 - 1120	
SM200.15D/23D	160	160	440 - 1100	
	200	240	500 - 1180	
	210	240	505 - 1185	
	240	240	520 - 1200	
SM200.30D	200	240	500 - 1180	
	210	240	505 - 1185	
	240	240	520 - 1200	

Dimensions mm

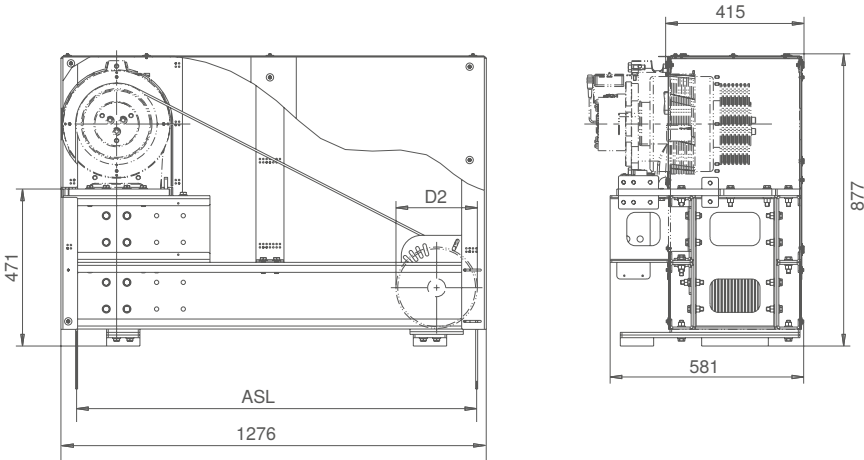

Besoin d'un prix ou d'un conseil technique ?

Ventilateur Ziehl Abegg ZAFRAME MK2850B



4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

Voir la gamme Ziehl Abegg sur notre site :

www.motralec.com/.../ziehl-abegg

DEMANDER UN PRIX >