

Fiche produit Motralec Ziehl Abegg Zarail RH40W 2R - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

ZArail
RH40W..2R

www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10

Fans for railroad engineering
since 2013

ZArail

RH40W..2R

Standard motor



Description

Design: RH*

Design: IMB 3

Installation position: H

Thermal class: THCL155

Degree of protection : IP55


Number of poles: 4-2 pole

Min. permitted ambient temperature $t_{R(min)}$: -30 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Impeller made of bright sheet metal, powder-coated, ultramarine blue

Inlet ring supplied loosely, powder-coated, RAL 7032 (pebble grey)

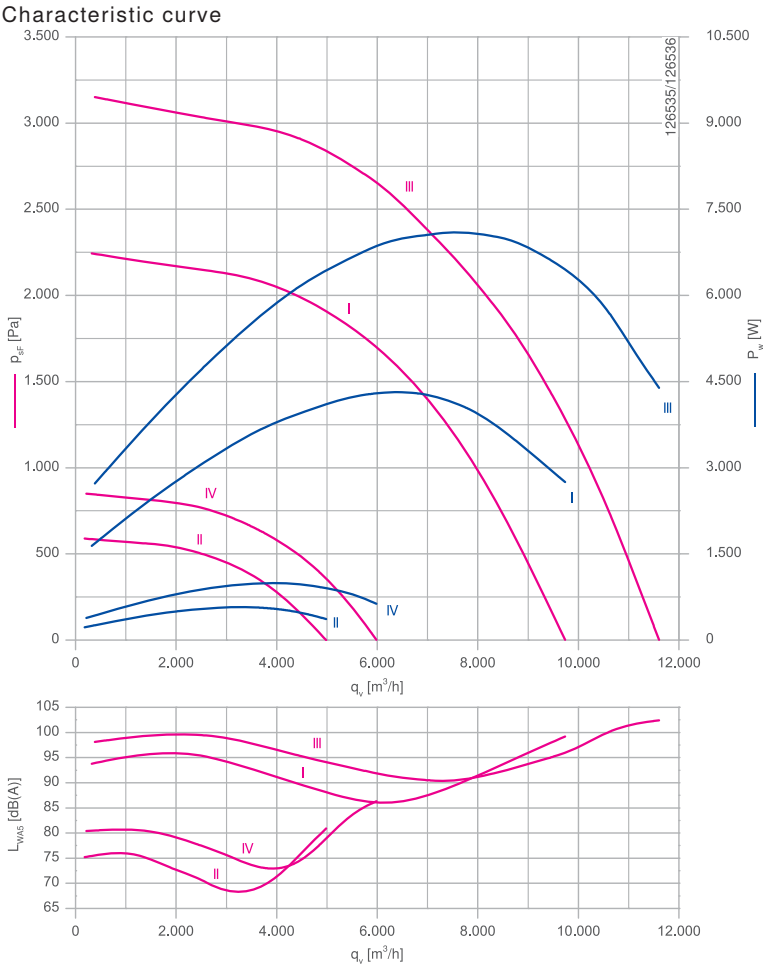

Measured with inlet ring, without guard grille according to ISO 5801

Inlet ring	00411855	RAL 7032 (pebble grey)	Page 302
Inlet ring	00411848	unpainted	
Connection diagram	1360-221XA KLK		Page 328



Performance data 50 Hz

Rated frequency	f_{max}	Hz	50
Rated voltage	U_N	V	400
Motor size			132M
Type			RH40W-QDN.H7.2R
Article no.			172341
Connection			Y/YY
Motor output power	P_N	kW	1.30/4.90
Rated current	I_N	A	2.70/10.80
Speed	n_N	min ⁻¹	1460/2900
Weight		kg	89.00
Characteristic curves			II/I

Performance data 60 Hz

Rated frequency	f_{max}	Hz	50
Rated voltage	U_N	V	460
Motor size			132M
Type			RH40W-QDN.H7.2R
Article no.			172361
Connection			Y/YY
Motor output power	P_N	kW	2.20/8.20
Rated current	I_N	A	4.50/15.50
Speed	n_N	min ⁻¹	1750/3480
Weight		kg	88.00
Characteristic curves			IV/III

Dimensions mm

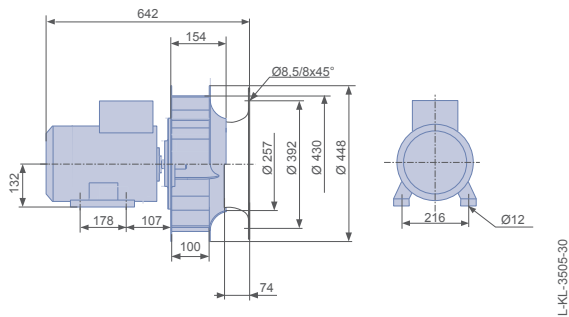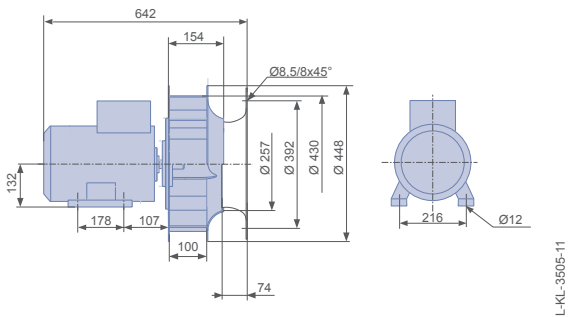

ziehl-abegg.com



Besoin d'un prix ou d'un conseil technique ?

Ventilateur Ziehl Abegg ZARAIL RH40W 2R



4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

Voir la gamme Ziehl Abegg sur notre site :

www.motralec.com/.../ziehl-abegg

DEMANDER UN PRIX >