

Fiche produit Motralec Ziehl Abegg Zatop SM200 - fiche technique | Motralec

■ **DEMANDE DE PRIX RAPIDE** : <https://www.motralec.com/demandeContact>

Elevator machine ZAtop
Ap. 1976

Drive technology for elevators 2025

www.motralec.com / service-commercial@motralec.com / 01.39.97.65.10

ZAtop gearless elevator machine

SM200




Synchronous motor actuated by permanent magnets and according to the provisions of the Lift Directive 2014/33/EU

- Elevator machine
- NdFeB magnets
 - Structural width ≤ 320 mm for the narrowest shaft dimensions
 - Noise emissions: < 50 dB(A)
 - Insulation class F with temperature monitoring
- Brake system
- Safety component in accordance with Lift Directive 2014/33/EU
 - Separately activated brake circuits
 - Deployable as an element of the ascending car overspeed protection means
 - Deployable as part of the protection against unintended car movement

Technical data

SM200

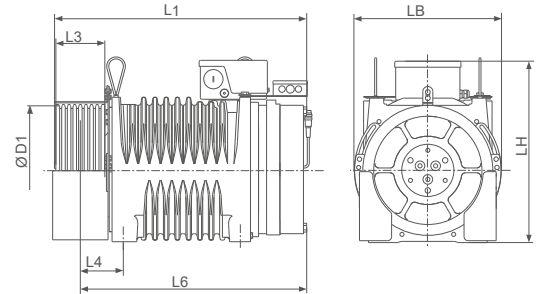


Motor cables	Page 111
Machine frames	Page 63
Deflection pulleys	Page 70
Adapter plates	Page 59
Forced ventilation	Page 73
ZAlift	Page 76

Motor type	Nominal torque Nm	Max. axle load kg	Nominal speed rpm	Rated output power kW	L1 mm	LH mm	L4 mm	L6 mm	LB mm	D1 mm	L3 mm	Weight kg	
SM200.15D-20	250	1855	96 - 306	2.5 - 8	491	438	81	428	320	160	76	150	
										200	88	155	
										240		162	
									366	320	74	166	
SM200.23D-20	330 - 380	2575 - 2850		3.8 - 13.3	513		96	443	320	160	106	175	
									200	124	184		
					517					240		193	
					513					360	320	110	196
									422	400	92	208	
									474	450		222	
SM200.30D-20	450 - 475	2690 - 2850	60 - 306	3.0 - 14.4	568			498	320	200	106	214	
											124	215	
										240		224	
									360	320	110	227	
									422	400	92	239	
									474	450		252	
SM200.40E-20	450 - 600	3300 - 3600	96 - 300	6.0 - 19.2	654	451	105	569	322	160	106	280	
					632		97	561		200		282	
									240	124	295		
					681		122	586			173	303	
					632		102	566	360	320	122	307	
					631		97	561	422	400	95	310	
								520	500	90	329		
					SM200.45E-20		650 - 710		60 - 300	4.5 - 20.4	654		105
632	97	561		200							282		
		240	124	295									
681	122	586		173		303							
632	102	566	360	320		122					307		
631	97	561	422	400		95					310		
		520	500	90	329								

Scope of delivery and options

SM200	Standard	Options
Motor	Gearless elevator machine	-
Traction sheave	See D1	-
Brake	Certified brake system	Mechanical hand release system with or without bowden cables
Brake monitoring	Microswitch	Inductive proximity switches
Motor cable	5 m (SM200.15D to SM200.30D)	10 m, 15 m, 20 m, 25 m halogen free
Absolute encoder	EnDat	BiSS-C / SSI / SinCos / TTL
Rope guard	2 pieces	3. Rope guard
Temperature monitoring	PTC thermistor	PT100-thermistor
Cooling	Surface cooling	Forced ventilation

Resulting rope force

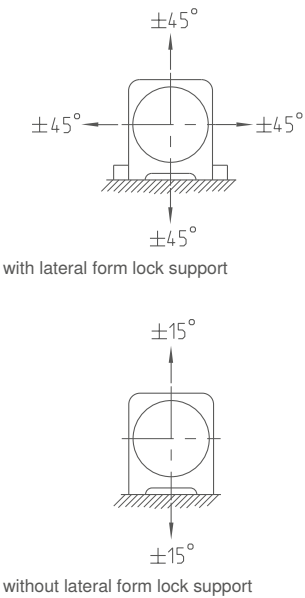

Example configurations

Other configurations, also outside of the examples listed below, are possible.
Our calculation software ZAlift is available to you for fast and convenient calculation of your elevator machine.

Suspension	Payload	Speed	Traction sheave	Motor type	Number of ropes	Rope diameter	Motor power	Rated current
	kg	m/s	mm			mm	kW	A
1:1	375	1.00	400	SM200.30D-20	5	10.0	3.0	10.5
	450	1.00	160	SM200.15D-20	6	8.1	3.1	10.7
	450	1.00	400	SM200.40E-20	5	10.0	6.0	16.5
	480	1.00	240	SM200.23D-20	11	6.0	3.8	12.0
	525	1.60	320	SM200.45E-20	7	8.0	7.1	20.0
	630	1.00	240	SM200.30D-20	11	6.0	4.8	14.5
	630	1.00	320	SM200.40E-20	7	8.0	6.0	16.5
2:1	450	1.00	400	SM200.23D-20	5	8.0	3.8	12.0
	480	1.00	320	SM200.15D-20	4	8.0	4.4	13.0
	630	1.00	450	SM200.30D-20	5	8.0	4.8	14.5
	630	1.60	240	SM200.15D-20	8	6.0	6.8	19.0
	630	1.60	320	SM200.23D-20	6	8.0	7.6	21.0
	675	1.60	200	SM200.15D-20	8	6.0	8.0	22.0
	800	1.00	500	SM200.40E-20	5	8.0	6.0	16.5
	800	1.60	320	SM200.30D-20	6	8.0	9.6	26.0
	1000	1.00	240	SM200.23D-20	10	6.0	6.7	18.5
	1000	1.00	320	SM200.40E-20	7	8.0	7.5	20.0
	1000	1.00	400	SM200.45E-20	5	10.0	7.1	20.0
	1000	1.60	240	SM200.30D-20	11	6.0	12.8	34.0
	1250	1.60	320	SM200.45E-20	8	8.0	14.3	36.0
	1275	1.00	240	SM200.30D-20	11	6.0	8.4	23.0
	1600	1.00	240	SM200.40E-20	16	6.0	10.6	26.5
	1800	1.00	200	SM200.45E-20	8	8.1	14.3	36.0
	2000	1.00	240	SM200.45E-20	16	6.0	11.6	30.0
4:1	2500	1.00	320	SM200.45E-20	7	8.0	19.2	46.0



Besoin d'un prix ou d'un conseil technique ?

Moteur Ziehl Abegg ZATOP SM200



4,7/5 . +600 avis Google

- Devis rapide et conseil technique par nos spécialistes
- Plus de 200 000 références et 30 marques distribuées
- Vente, réparation, bobinage et SAV en atelier
- Livraison partout en France, accompagnement avant et après-vente

Voir la gamme Ziehl Abegg sur notre site :

www.motralec.com/.../ziehl-abegg

DEMANDER UN PRIX >